

FT-80C


SERVICE MANUAL

YAESU MUSEN CO., LTD.
C.P.O. BOX 1500
TOKYO, JAPAN

CONTENTS

TOP COVER REMOVAL.....	2
EXPLODED VIEW.....	3
MAIN UNIT.....	4
Parts Layout.....	4
Circuit Diagram.....	5
FILTER UNIT.....	7
Parts Layout.....	7
Circuit Diagram.....	7
NB UNIT.....	7
Parts Layout.....	7
Circuit Diagram.....	8
LOCAL UNIT.....	8
Parts Layout.....	8
Circuit Diagram.....	9
100W PA UNIT.....	10
Parts Layout.....	10
Circuit Diagram.....	10
LPF UNIT.....	11
Parts Layout.....	11
Circuit Diagram.....	11
DISPLAY UNIT.....	12
Parts Layout.....	12
Circuit Diagram.....	13
CONNECTION DIAGRAM.....	14
LEVEL DIAGRAM.....	15
Transmit.....	15
Receive.....	16
FM UNIT (Option).....	17
Parts Layout.....	17
Circuit Diagram.....	17
SIGNAL PATH.....	19
SSB MODE.....	19
CW MODE.....	20
AM MODE.....	21
FM MODE.....	22
CIRCUIT DESCRIPTION.....	23
PROGRAMMING.....	27
ALIGNMENT.....	29
I. Local Unit.....	31
II. Main Unit -- Receiver.....	32
III. Main Unit -- Transmitter.....	34
IV. Noise Blanker Unit.....	35
V. 100W PA Unit (Idling Current).....	35
VI. LPF Unit (CM Coupler Balance).....	36
VII. Main Unit (AFP - Automatic Final Protection).....	36
PARTS LIST.....	37

FT-80C SERVICE MANUAL

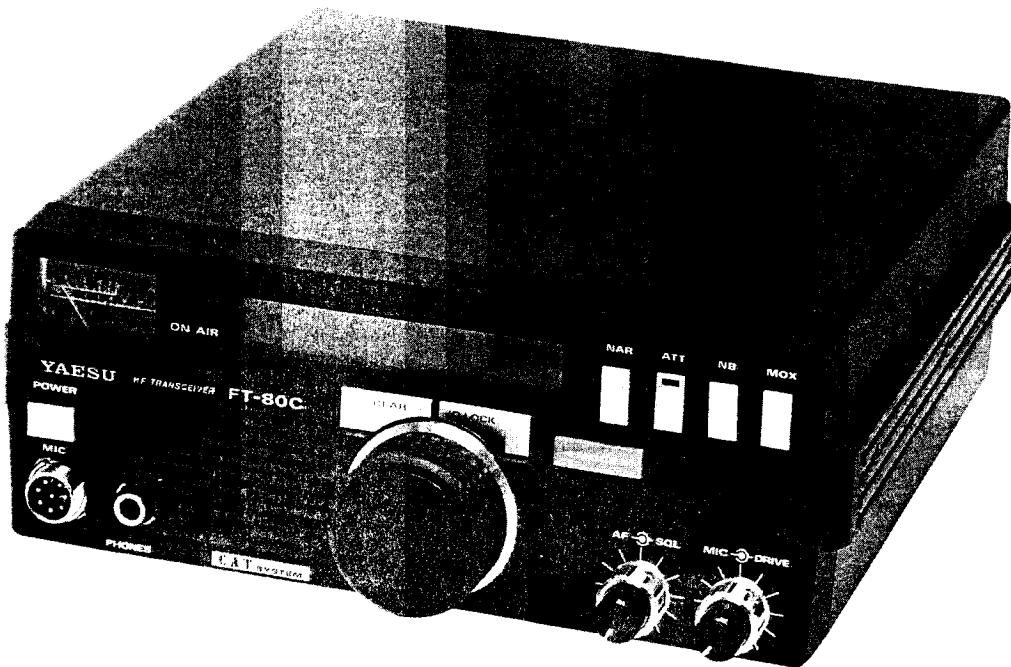

This manual provides the technical information necessary for trained technicians to service the FT-80C, when used in conjunction with the FT-80C Operating Manual. Detailed information regarding functions, interconnections and operation has been provided in the Operating Manual, and is not reprinted herein.

General information on integrated circuits and their applications is available in the data provided by the IC manufacturers. Specific circuit details are provided in the schematic diagrams in this manual. Yaesu recommends that all service jobs be performed only by qualified radio technicians having all necessary test equipment, and thorough familiarity with its use.

While we believe the technical information in this manual is correct, Yaesu assumes no liability for damage that may occur as a result of typographical or other errors that may be present. Your cooperation in pointing out any inconsistencies in the technical information would be appreciated.

Yaesu Musen reserves the right to make changes in the circuitry of this transceiver, in the interest of technological improvement, without obligation to notify owners or to modify any sets produced prior to the modification. Notwithstanding, Yaesu may issue addenda to this manual from time to time, which will be made available through Yaesu distributors.

TOP COVER REMOVAL

To open the case of the FT-80C, remove the eight screws indicated in Figure 1. Then with the transceiver facing away from you, grasp the top panel with both hands near the front as shown in Figure 2. There are clips at positions **A** which can move only vertically, and a clip at **B** which can move only horizontally. Lift up on both sides to unlatch the clips at points **A** while holding the center clip **B** in the same position with your thumbs, and then slide the top panel back about 2 centimeters (1 inch) until the clips clear the top edge of the front panel.

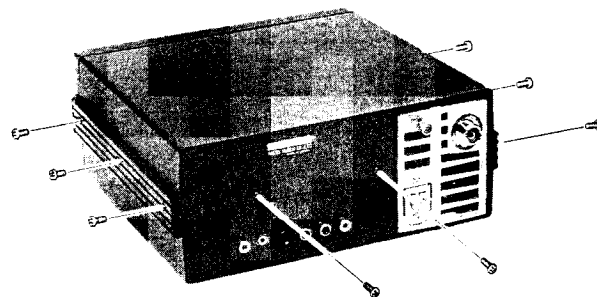


Figure 1

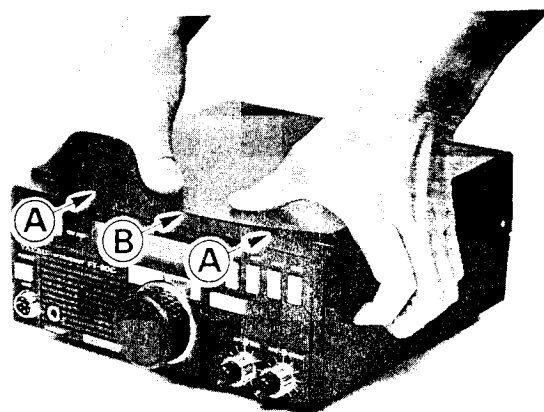


Figure 2


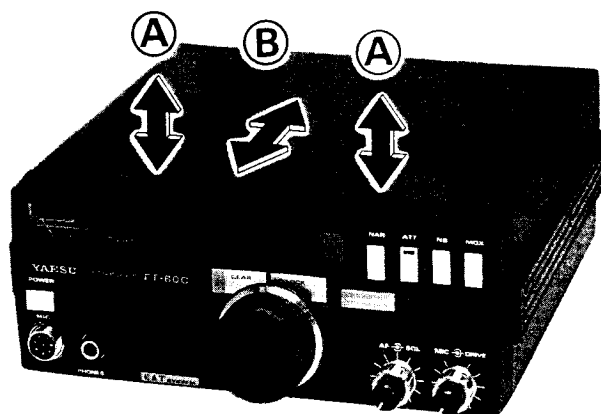



Figure 3

MAIN UNIT


PARTS LAYOUT

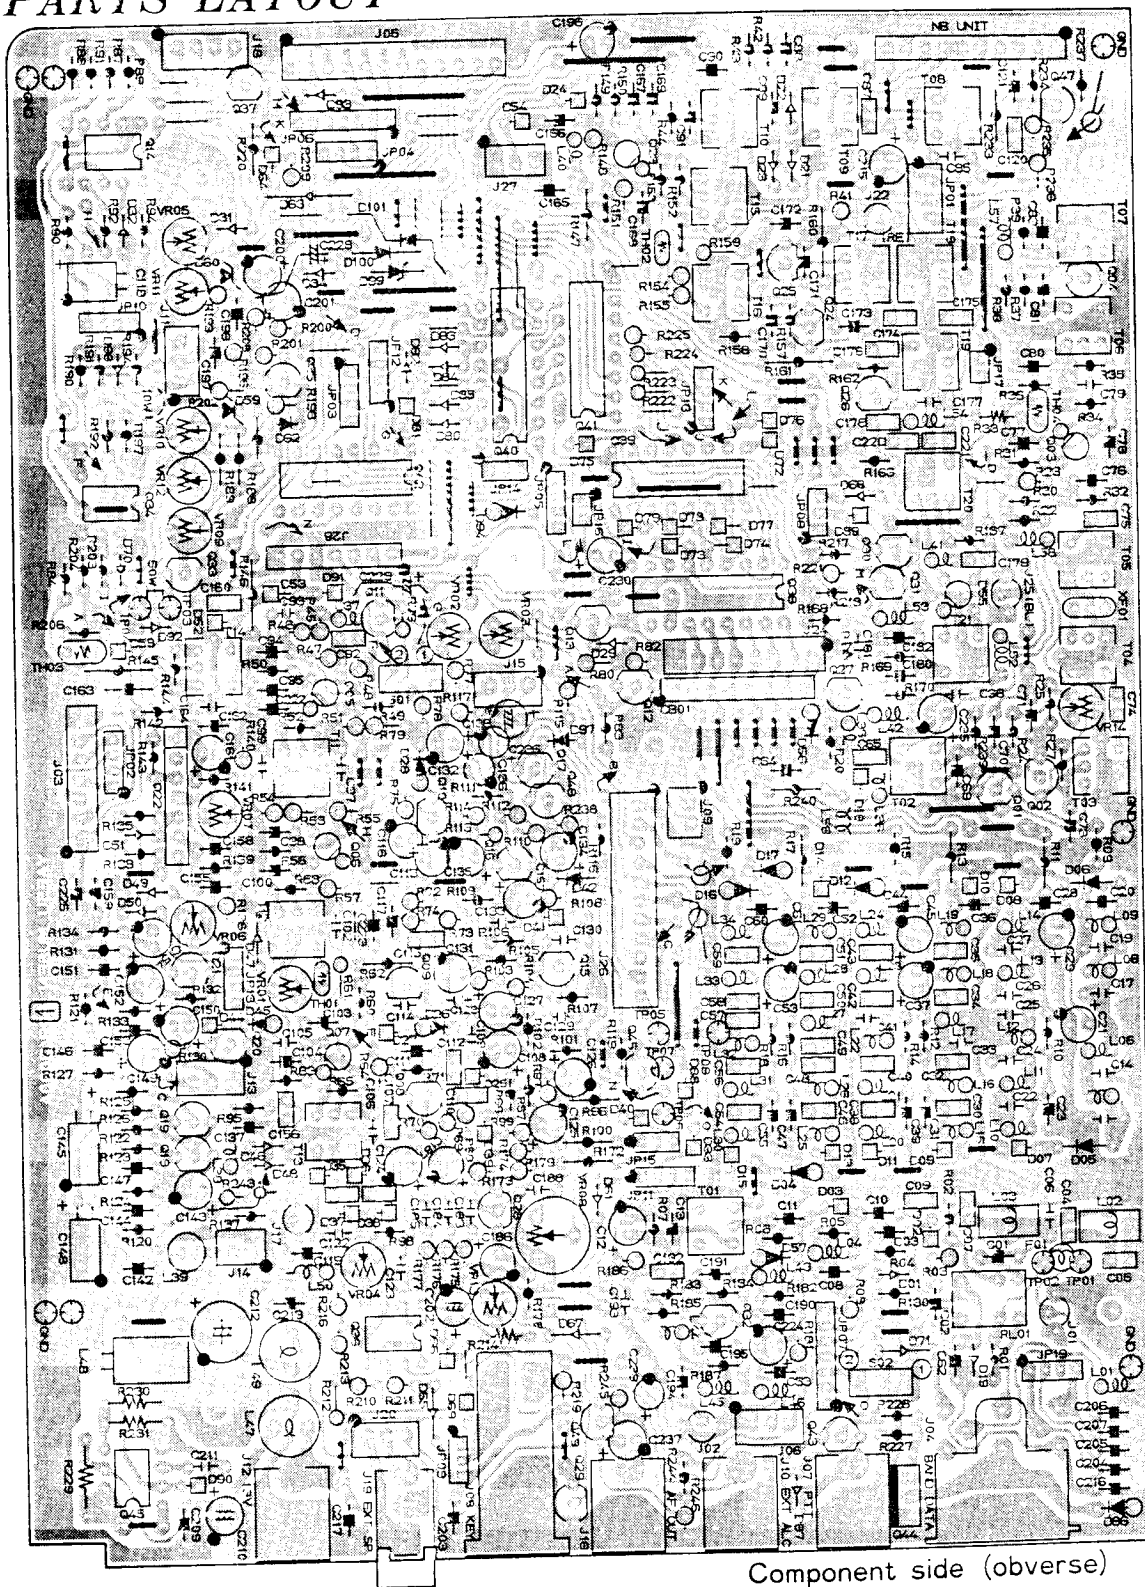


Component side (obverse)

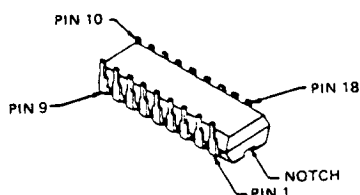


M54563P (Q1038)
M54564P (Q1040)




μPD4028BC (Q1039)
μPD4094BC (Q1041, 1042)




IR3M03A (Q1045)
M5218P (Q1014, 1034)
M5223P (Q1036)








μPC1037H (Q1022)

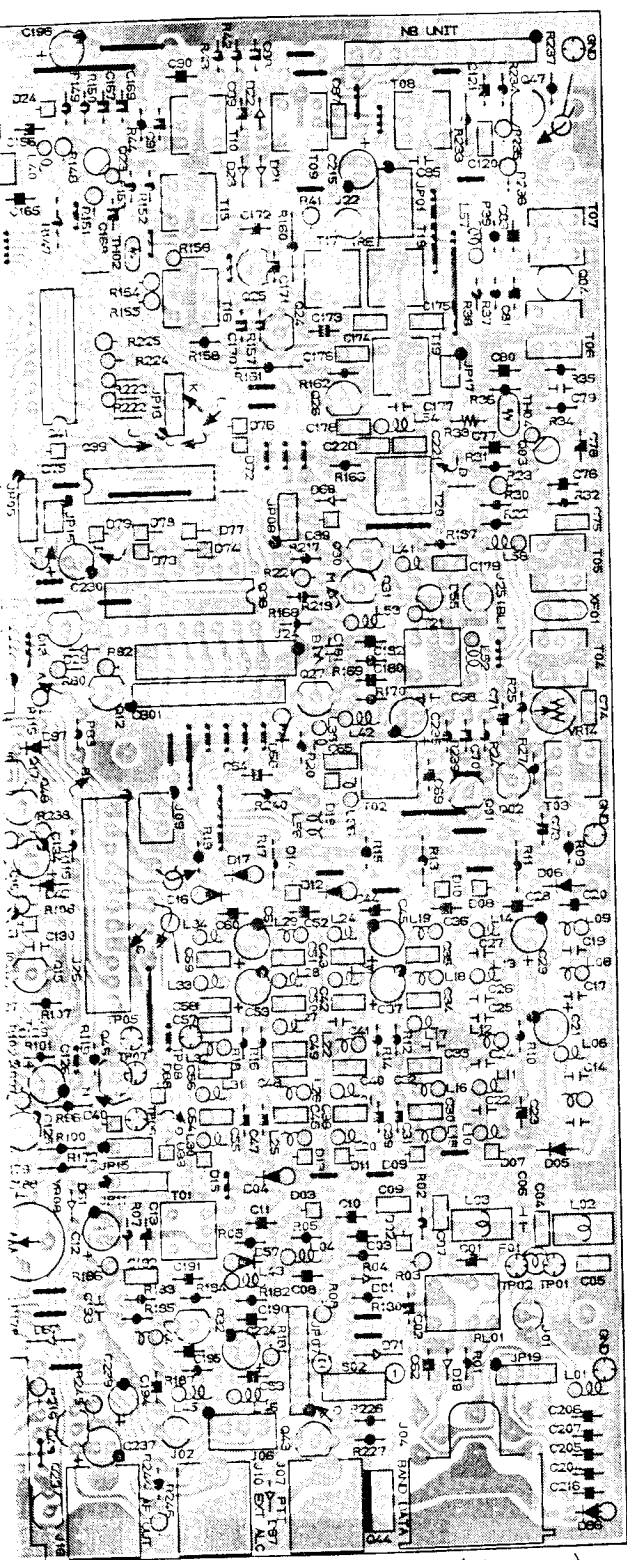

Component side (obverse)

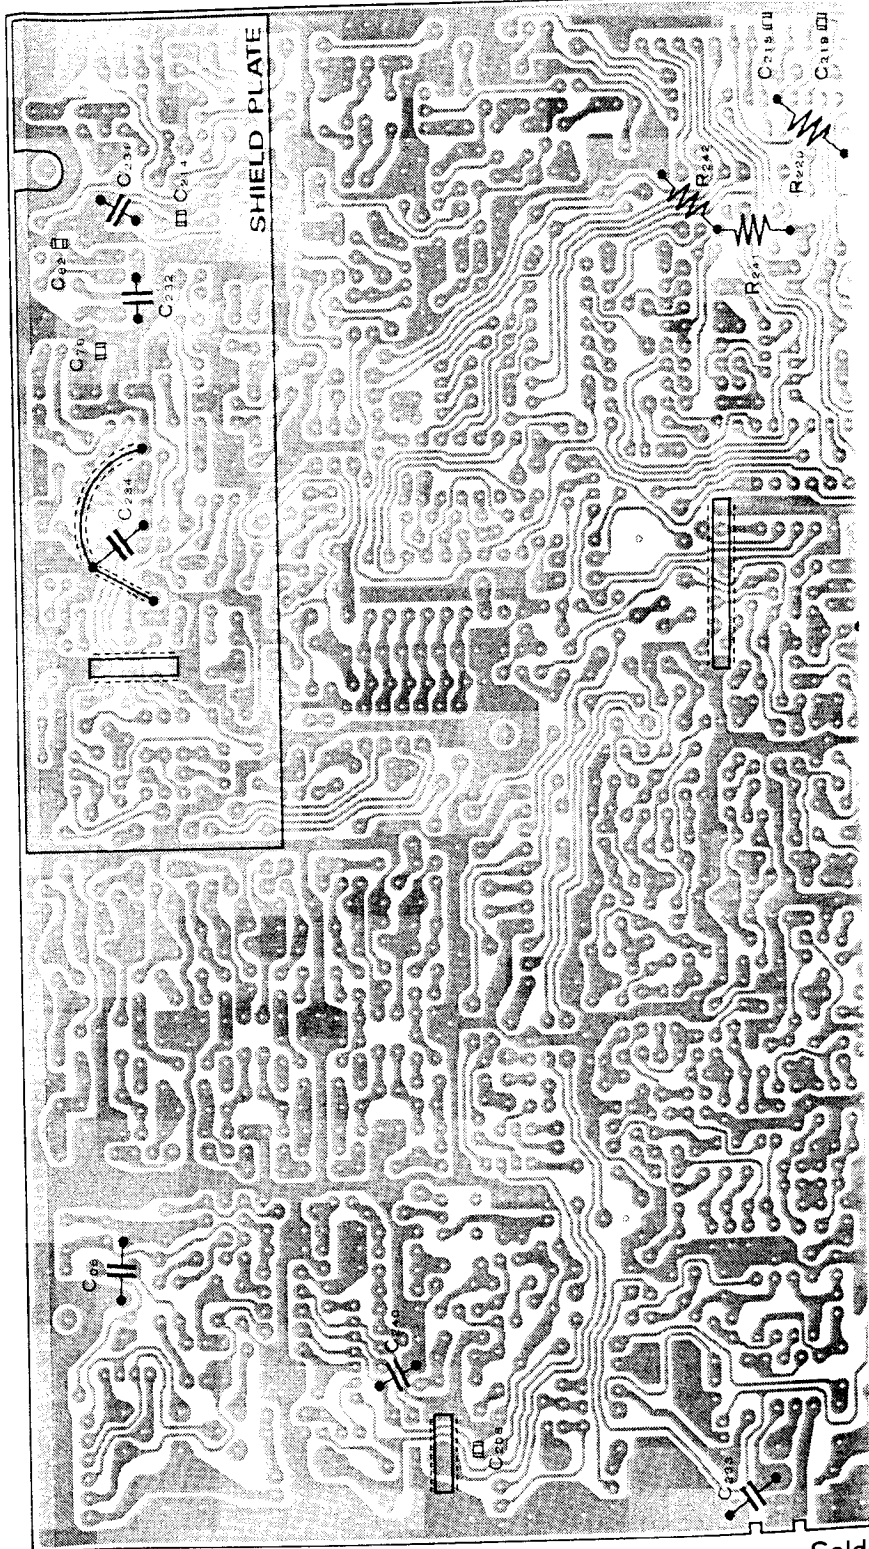

Solder





28BC (Q1039)
94BC (Q1041,1042)


IR3M03A (Q1045)
M5218P (Q1014,1034)
M5223P (Q1036)

μ PC1037H (Q1022)


ND487C2-3R (D1055)

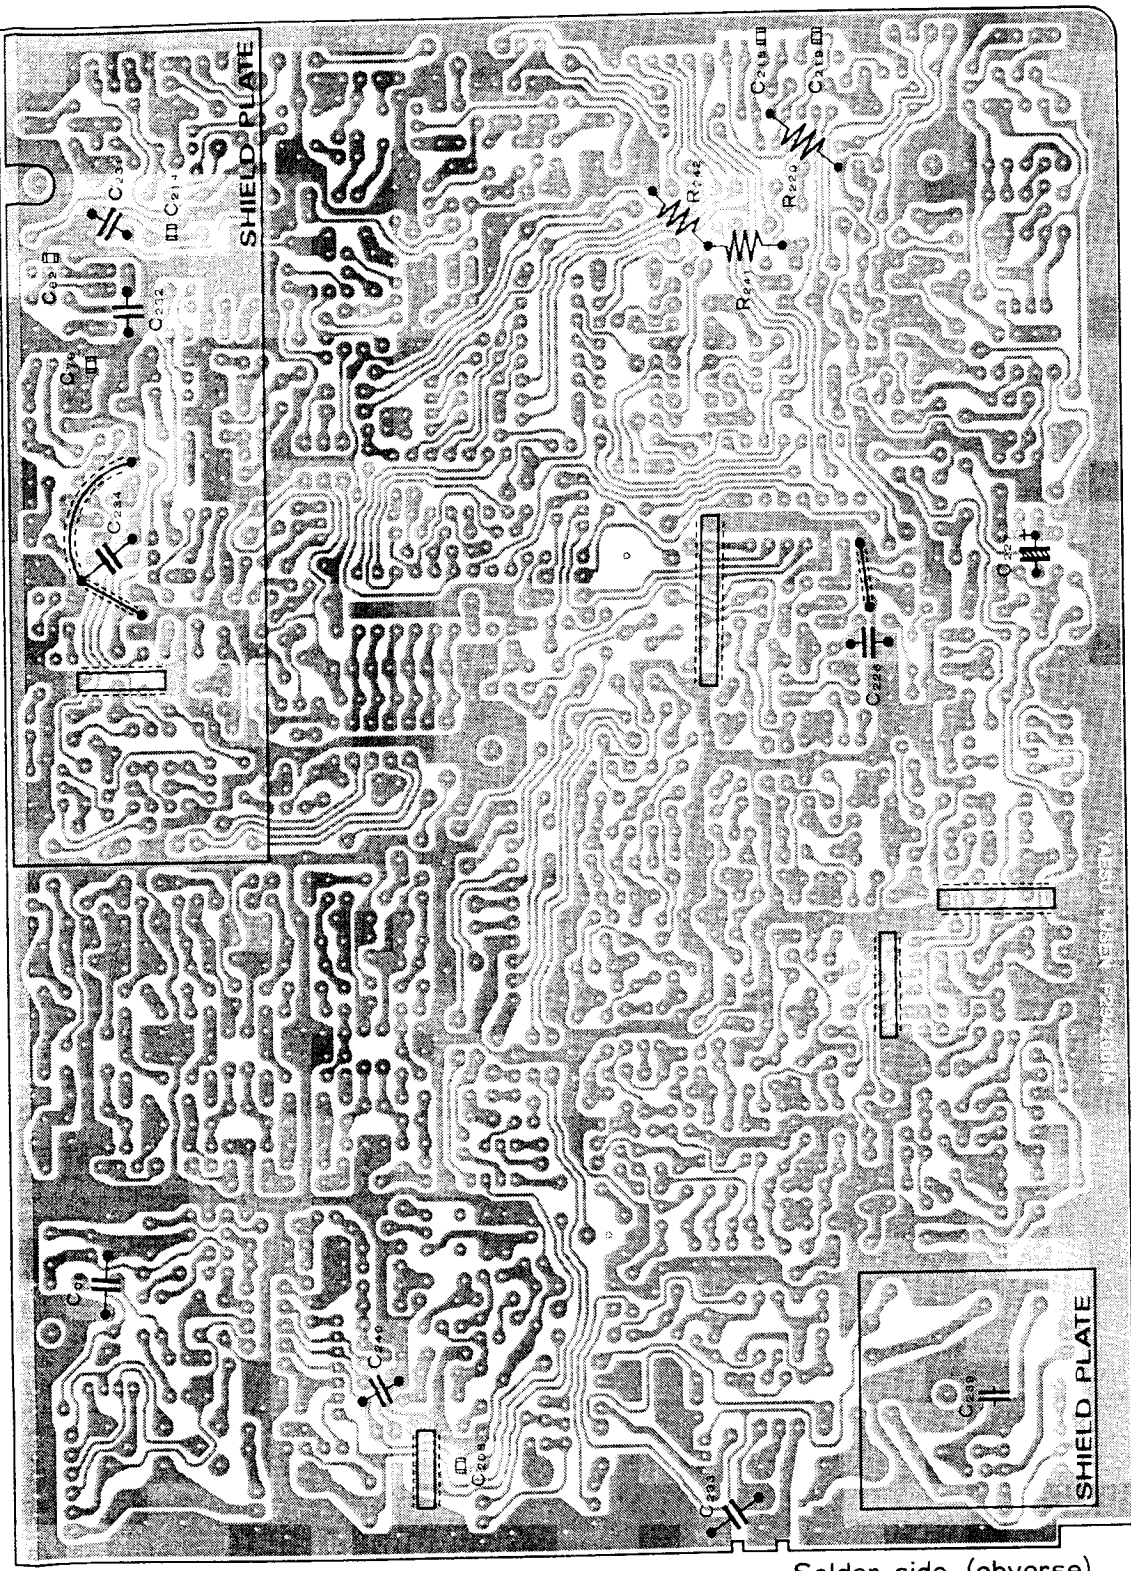


3SK74L (Q1003,
1005~1007,
1023)




2SK104J (Q1010)




2SK125 (Q1001,1002,
1027)




2SK192AGR (Q1011)
2SK241GR (Q1004,1024,
1025)




2SA733AP (Q1012)
2SC458B (Q1008,1009,
1015,1016,
1018,1019,
1021,1028,
1047,1049)
2SC458BTZ (Q1035)
2SC535B (Q1026)
2SC2053 (Q1032)




2C1037H (Q1022)

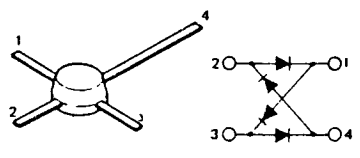

ND487C2-3R (D1055)




BA1A4M (Q1013,1020,1029,1030,
1033,1037,1046)
BA1L3Z (Q1017,1048)
DTA143ES (Q1031,1043)



2SD669A (Q1044)


MAIN UNIT \

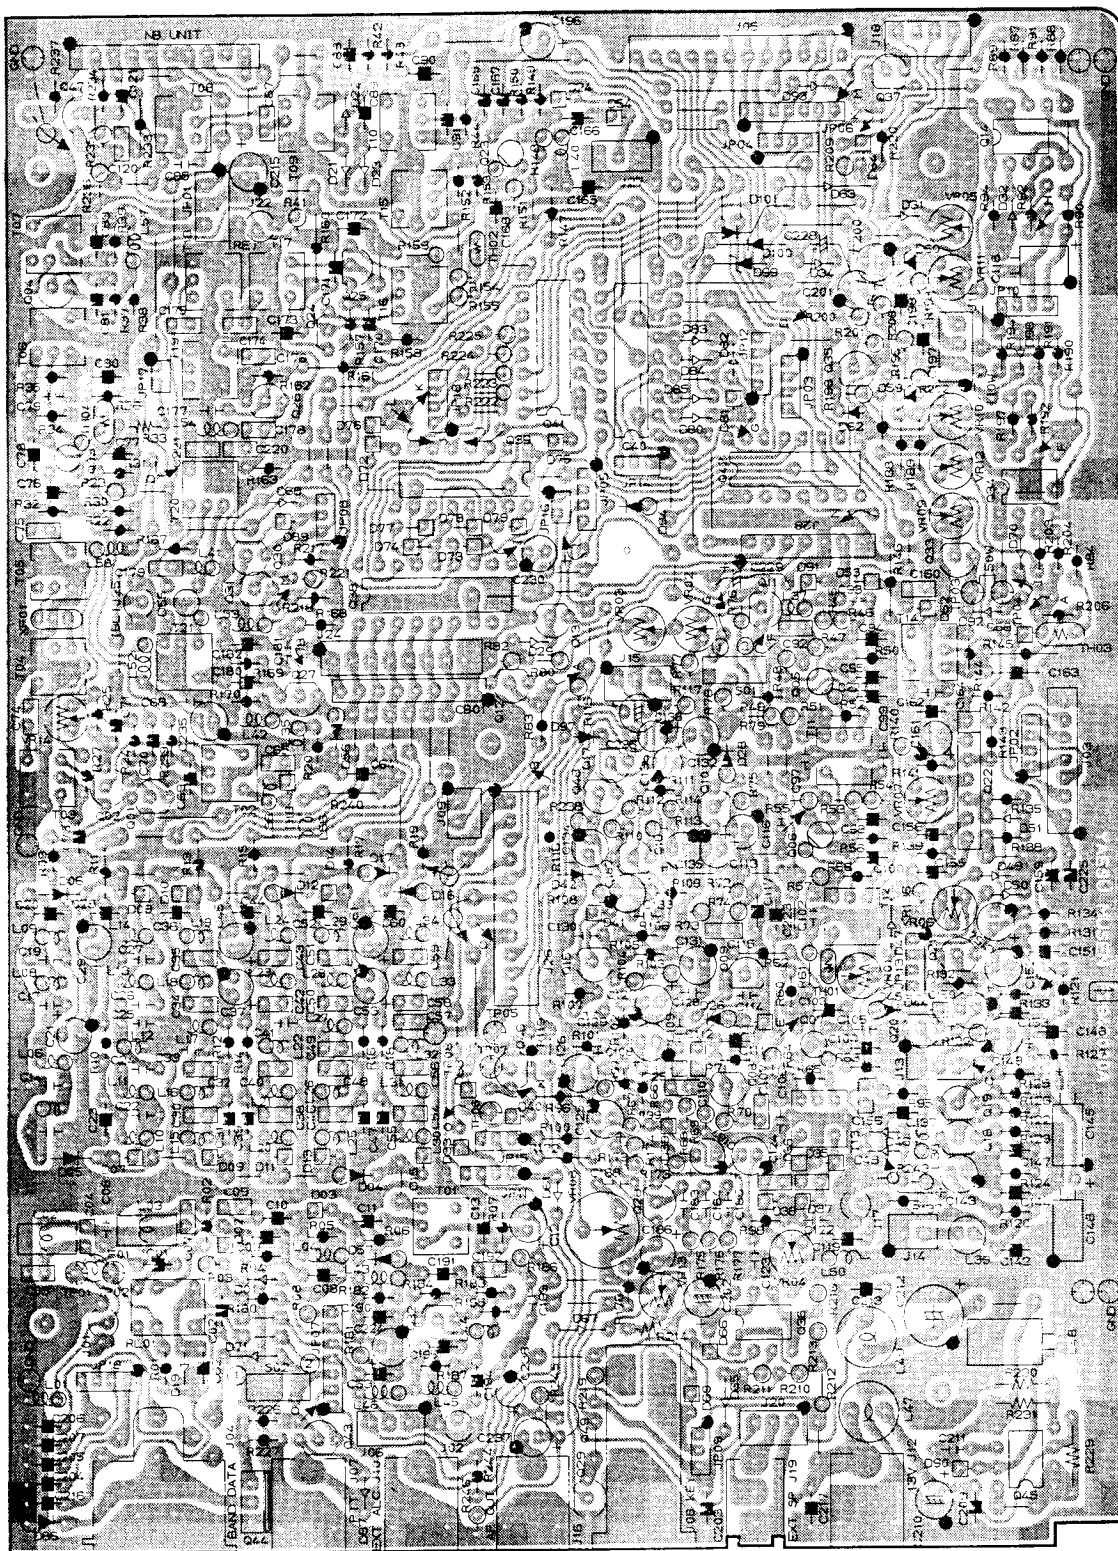

Component side (reverse)

	E(S)	C(D)
Q1001	25/-0.1	127/134
Q1002	25/-0.1	127/134
Q1003	2.0/0	132/134
Q1004	0.6	13.4
Q1005	1.7/0	7.8/8.8
Q1006	2.2	7.4
Q1007	1.9	8.0
Q1008	4.8	8.3
Q1009	0	3.4
Q1010	3.6	3.6
Q1011	6.2	8.8
Q1012	5.3/0.7	0/0
Q1013	0/0	5.0/0.1
Q1015	4.2	8.4
Q1016	1.3	4.4
Q1017	0/0	0/0
Q1018	0.1	1.4
Q1019	0.8	4.2
Q1020	0/0	0/0
Q1021	3.0	8.4
Q1023	1.9	0
Q1024	0/0.6	8.9/8.6
Q1025	0/0.6	8.9/8.6
Q1026	3.0	7.5
Q1027	0/1.6	-4.0/0.1
Q1028	0.6(0.3/0.6)	7.7(7.7/3.7)
Q1029	0(0/0)	0.6(0.6/0)
Q1030	0(0/0)	0(7.5/0)
Q1031	0(7.5/7.5)	0(-0.5/7.5)
Q1032	8.1	13.2
Q1033	0	6.9
Q1035	0	3.1
Q1037	0/0	0.5/7.4
Q1043	5.5/5.0	0/5.0
Q1044	0/0	0.6/0
Q1046	0/0	0.4/0
Q1047	0.8	8.7
Q1048	0/0	0/0

	1	2
Q1014	8.4/25	8.4/2
Q1022	7.0	—
Q1034	-5.2	0
Q1036	120/0.7	0/10
Q1038	0	0
Q1039	0	0
Q1040	0/0	4.8/2
Q1041	0	4.6
Q1042	0	0
Q1045	13.5	0.1

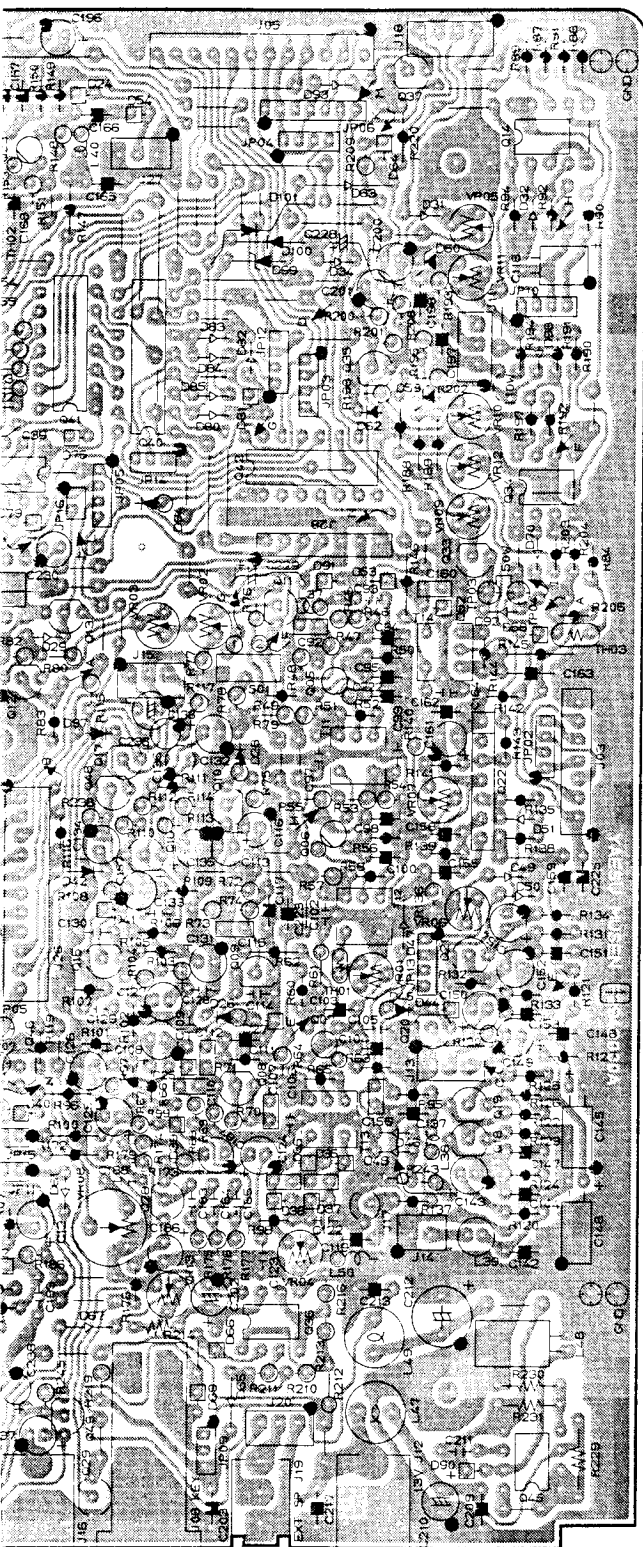

Component side (reverse)

MAIN UNIT VOLTAGE CHART
(DC VOLT)

	E (S)	C (D)	B (G ₁)	(G ₂)	REMARKS
Q1001	2.5/-0.1	12.7/13.4	-0.7/-5.1		RX/TX
Q1002	2.5/-0.1	12.7/13.4	-0.7/-5.1		RX/TX
Q1003	2.0/0	13.2/13.4	1.5/-4.1	3.2/3.2	RX/TX
Q1004	0.6	13.4	0		
Q1005	1.7/0	7.8/8.8	1.7/-4.0	3.4/3.4	RX/TX
Q1006	2.2	7.4	2.4	3.4	
Q1007	1.9	8.0	1.8	3.6	
Q1008	4.8	8.3	5.5		
Q1009	0	3.4	0.1		
Q1010	3.6	3.6	0		
Q1011	6.2	8.8	3.4		
Q1012	5.3/0.7	0/0	4.7/4.6		RX/TX
Q1013	0/0	5.0/0.1	0/4.3		RX/TX
Q1015	4.2	8.4	4.8		
Q1016	1.3	4.4	2.0		
Q1017	0/0	0/0	0.1/3.7		RX/TX
Q1018	0.1	1.4	0.7		
Q1019	0.8	4.2	1.4		
Q1020	0/0	0/0	7.0/0		RX/TX
Q1021	3.0	8.4	3.6		
Q1023	1.9	0	1.8	3.2	
Q1024	0/0.6	8.9/8.6	-3.9/0.1		RX/TX
Q1025	0/0.6	8.9/8.6	-3.9/0.1		RX/TX
Q1026	3.0	7.5	3.8		
Q1027	0/1.6	-4.0/0.1	0/6.9		RX/TX
Q1028	0.6(0.3/0.6)	7.7(7.7/3.7)	1.0(1.0/0.9)		RX CW(TX CW KEY UP/DOWN)
Q1029	0(0/0)	0.6(0.6/0)	0(0/11.0)		RX CW(TX CW KEY UP/DOWN)
Q1030	0(0/0)	0(7.5/0)	0(0/10.5)		RX CW(TX CW KEY UP/DOWN)
Q1031	0(7.5/7.5)	0(-0.5/7.5)	0(7.5/0)		RX CW(TX CW KEY UP/DOWN)
Q1032	8.1	13.2	8.8		
Q1033	0	6.9	0		
Q1035	0	3.1	-0.5		
Q1037	0/0	0.5/7.4	4.0/0		0.5~1.5, 14.5~18.5 21.5~25.0MHz / other
Q1043	5.5/5.0	0/5.0	5.0/0.6		RX/TX
Q1044	0/0	0.6/0	0/0.6		RX/TX
Q1046	0/0	0.4/0	0/4.8		RX/TX (MODE FM SPLIT ON)
Q1047	0.8	8.7	1.5		
Q1048	0/0	0/0	0.1/3.7		RX/TX

MAIN UNIT IC VOI

	1	2	3	4	5	6	7	8	9	10
Q1014	8.4/2.5	8.4/2.5	8.8/2.5	-9.0/-9.0	3.1/2.7	7.0/1.8	-7.6/8.4	8.9/8.9		
Q1022	7.0	—	5.4	0	3.1	3.1	3.1			
Q1034	-5.2	0	0	-9.0	0	0	-7.7	8.9		
Q1036	12.0/0.7	0/10.2	4.2/3.9	0/0	4.2/3.9	12.9/2.1	0/10.8	13.1/12.3		
Q1038	0	0	0	4.1	0.2	0.2	0	0.1	13.4	0
Q1039	0	0	0	0	0	4.7	0	0	0	5.0
Q1040	0/0	4.8/4.8	0/0	0/0	0/0	0/0	0/4.4	4.5/0	8.9/8.9	0/0
Q1041	0	4.6	0	5.0	0	5.0	0	0	0	0
Q1042	0	0	0	4.8	0	0	0	0	0	0
Q1045	13.5	0.1	-8.2	-9.0	-7.8	13.5	13.5	13.5		

MAIN UNIT VOLTAGE CHART

(DC VOLT)


(S)	C (D)	B (G ₁)	(G ₂)	REMARKS
0/-0.1	12.7/13.4	-0.7/-5.1		RX/TX
0/-0.1	12.7/13.4	-0.7/-5.1		RX/TX
0/0	13.2/13.4	1.5/-4.1	3.2/3.2	RX/TX
0.6	13.4	0		
7/0	7.8/8.8	1.7/-4.0	3.4/3.4	RX/TX
2.2	7.4	2.4	3.4	
1.9	8.0	1.8	3.6	
4.8	8.3	5.5		
0	3.4	0.1		
3.6	3.6	0		
5.2	8.8	3.4		
3/0.7	0/0	4.7/4.6		RX/TX
0/0	5.0/0.1	0/4.3		RX/TX
4.2	8.4	4.8		
1.3	4.4	2.0		
0/0	0/0	0.1/3.7		RX/TX
0.1	1.4	0.7		
0.8	4.2	1.4		
0/0	0/0	7.0/0		RX/TX
3.0	8.4	3.6		
1.9	0	1.8	3.2	
0/0.6	8.9/8.6	-3.9/0.1		RX/TX
0/0.6	8.9/8.6	-3.9/0.1		RX/TX
3.0	7.5	3.8		
0/1.6	-4.0/0.1	0/6.9		RX/TX
0.3/0.6	7.7(7.7/3.7)	1.0(1.0/0.9)		RX CW(TX CW KEY UP/DWN)
0/0	0.6(0.6/0)	0(0/11.0)		RX CW(TX CW KEY UP/DWN)
0/0	0(7.5/0)	0(0/10.5)		RX CW(TX CW KEY UP/DWN)
0.5/7.5	0(-0.5/7.5)	0(7.5/0)		RX CW(TX CW KEY UP/DWN)
3.1	13.2	8.8		
0	6.9	0		
0	3.1	-0.5		
0/0	0.5/7.4	4.0/0		0.5~1.5, 14.5~18.5 / other 21.5~25.0MHz
3/5.0	0/5.0	5.0/0.6		RX/TX
0/0	0.6/0	0/0.6		RX/TX
0/0	0.4/0	0/4.8		RX/TX (MODE FM SPLIT ON)
0.8	8.7	1.5		
0/0	0/0	0.1/3.7		RX/TX


MAIN UNIT IC VOLTAGE CHART

(DC VOLT)


1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	REMARKS
8.4/2.5	8.4/2.5	8.8/2.5	-9.0/9.0	3.1/2.7	7.0/1.8	-7.6/8.4	8.9/8.9											SQL VR CCW/CW
7.0	—	5.4	0	3.1	3.1	3.1												
-5.2	0	0	-9.0	0	0	-7.7	8.9											
12.0/0.7	0/10.2	4.2/3.9	0/0	4.2/3.9	12.9/2.1	0/10.8	13.1/12.3											KEY UP/DWN (MODE CW VRI13 MIN)
0	0	0	4.1	0.2	0.2	0	0.1	13.4	0	0.2	13.0	0	0	12.0	0	0	0	MODE AM, 14MHz
0	0	0	0	0	4.7	0	0	0	5.0	0	5.0	0	0	0	5.0			MODE AM, 14MHz
0/0	4.8/4.8	0/0	0/0	0/0	0/0	0/4.4	4.5/0	8.9/8.9	0/0	7.6/-1.3	0/7.5	0/0	0/0	0/0	7.7/7.7	7.9/7.9	0/0	MODE USB, RX/TX
0	4.6	0	5.0	0	5.0	0	0	0	0	0	0	0	4.8	5.0	5.0			14MHz
0	0	0	4.8	0	0	0	0	0	0	0	0	4.9	5.0	5.0	5.0			MODE USB, 14MHz
13.5	0.1	-8.2	-9.0	-7.8	13.5	13.5	13.5											

CIRCUIT DIAGRAM

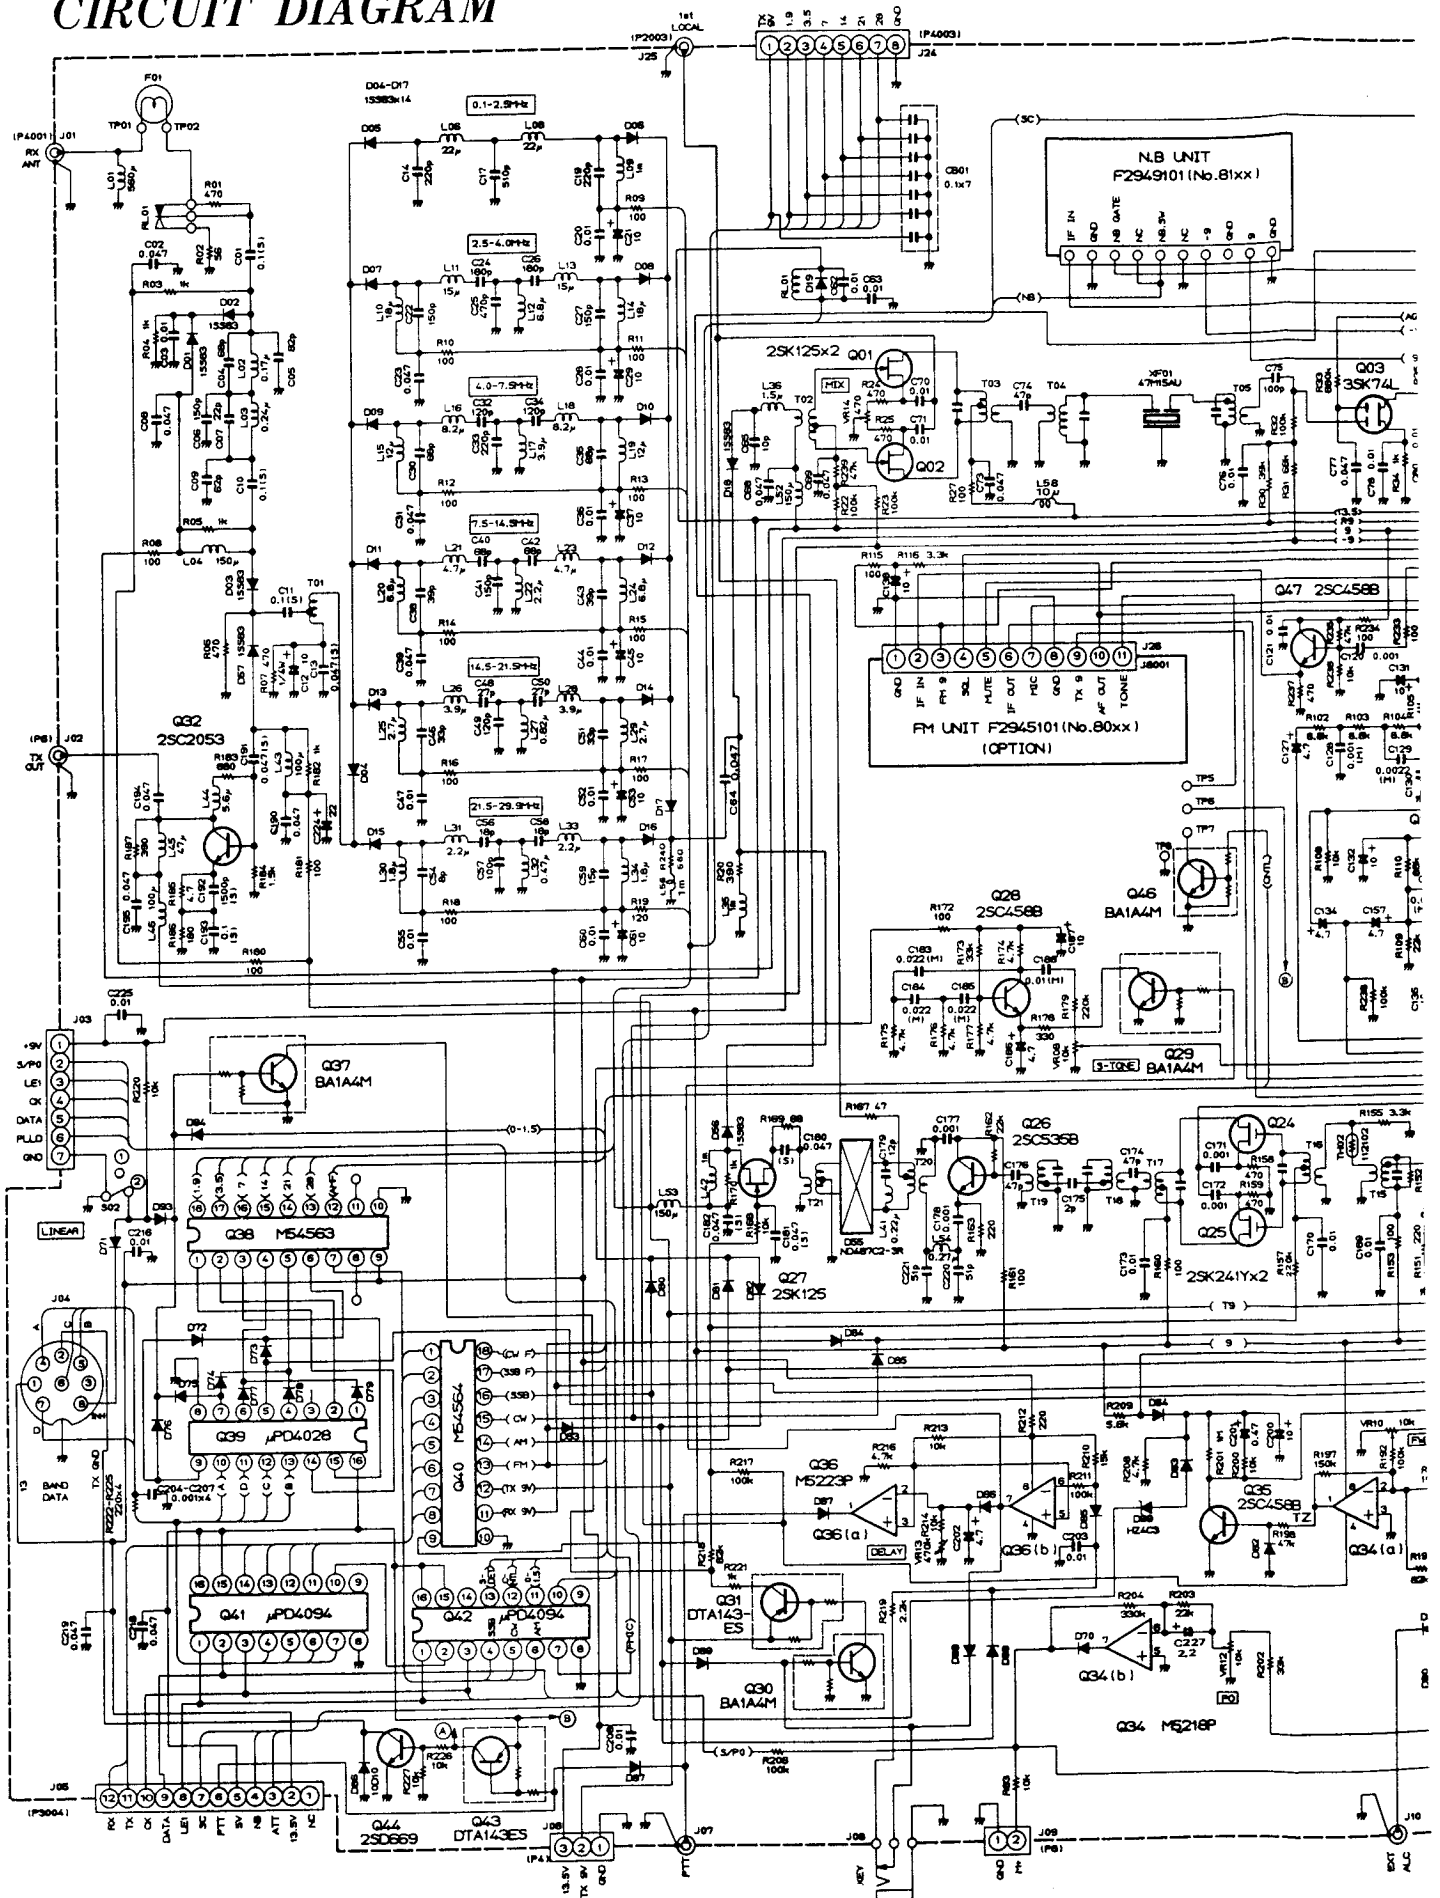


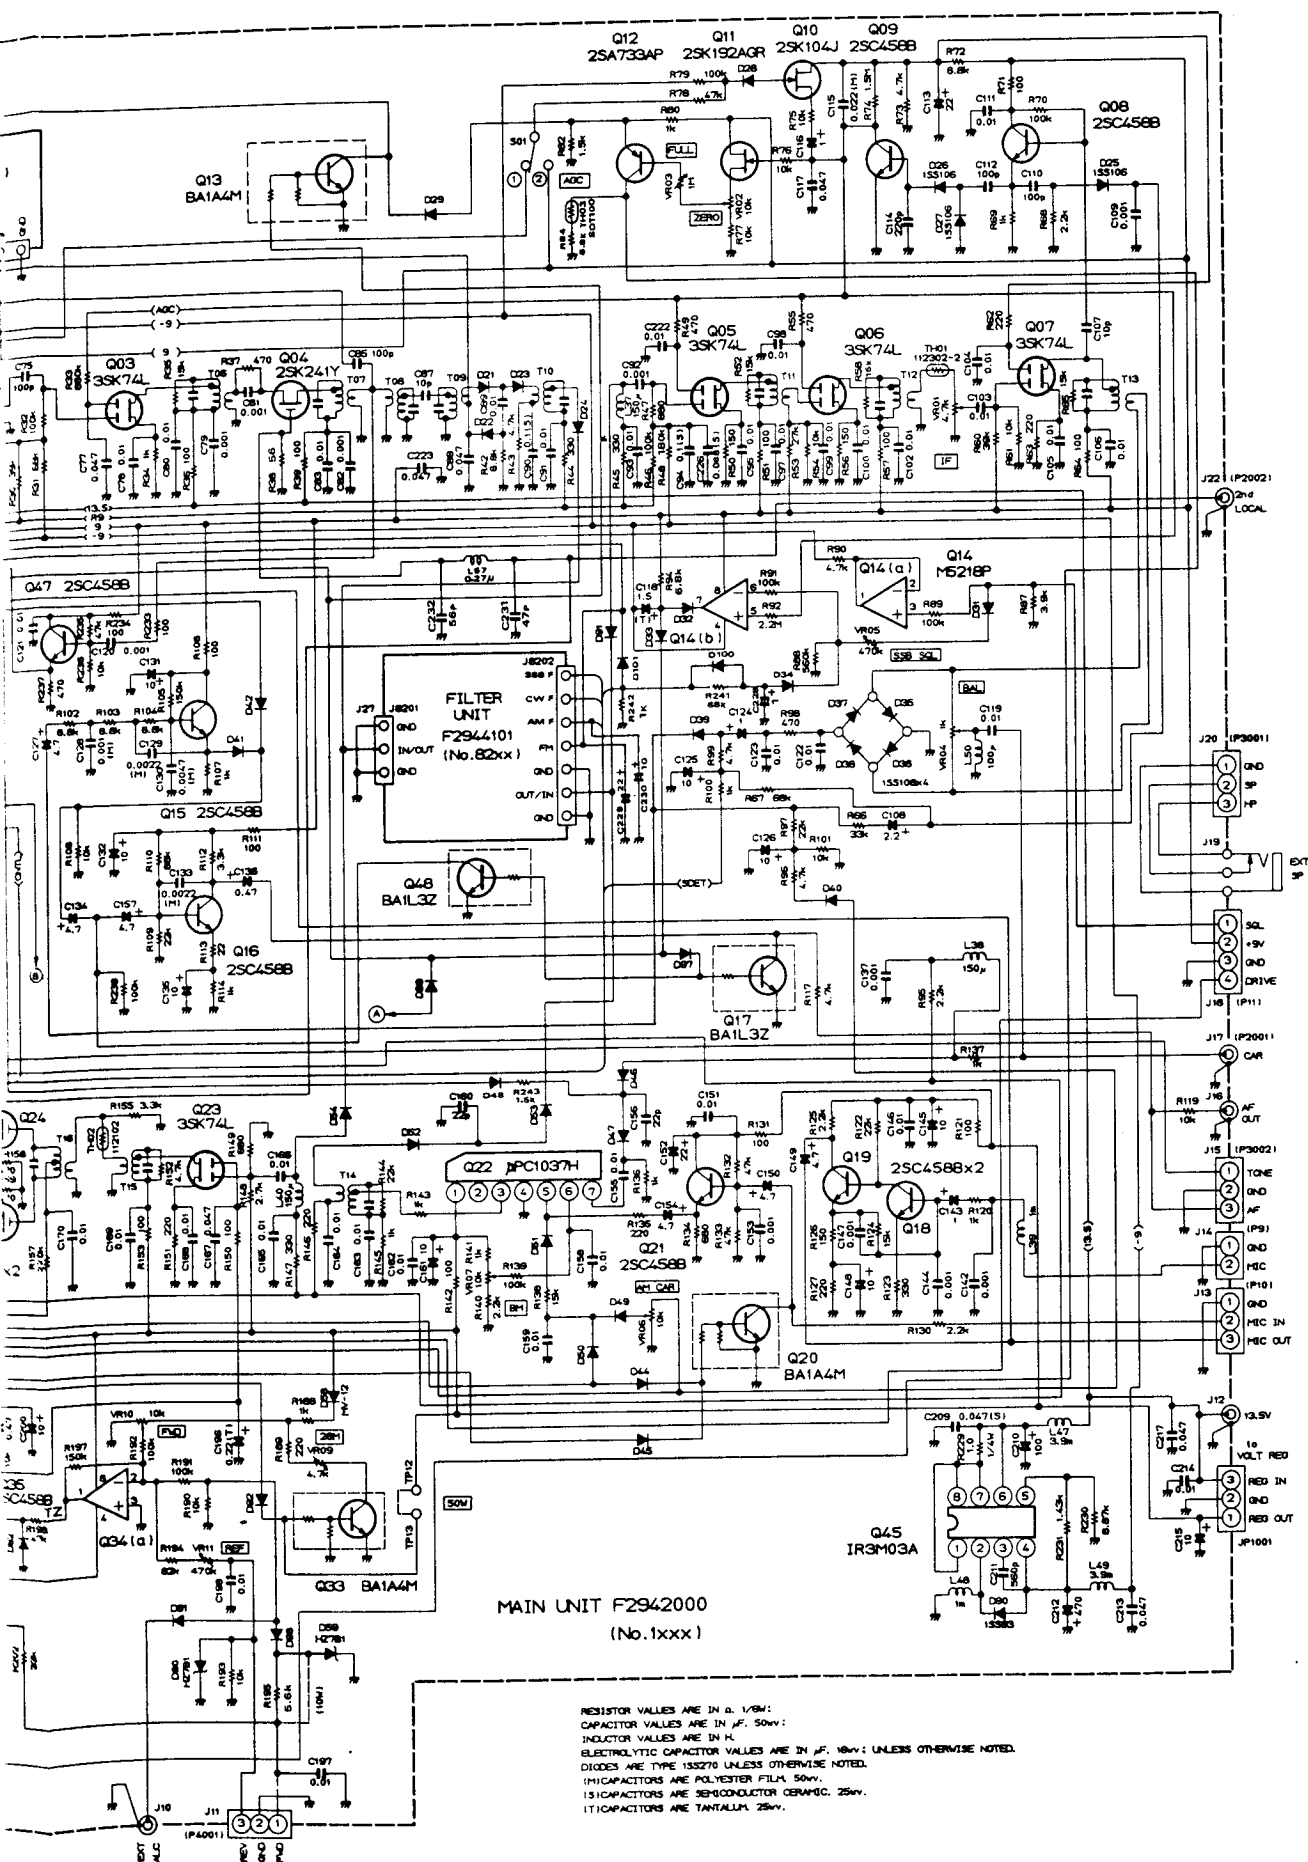

FILTER UNIT PARTS LAYOUT


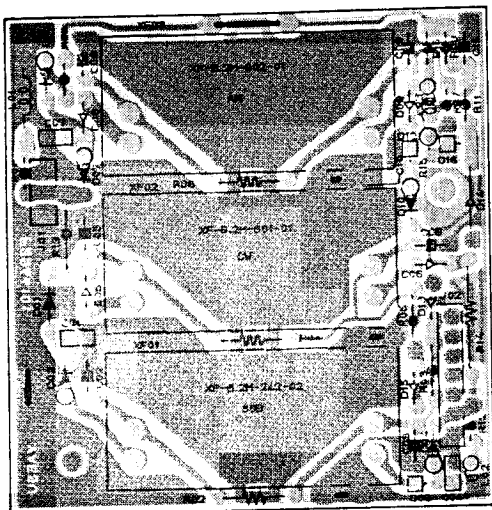


Component side (obverse)

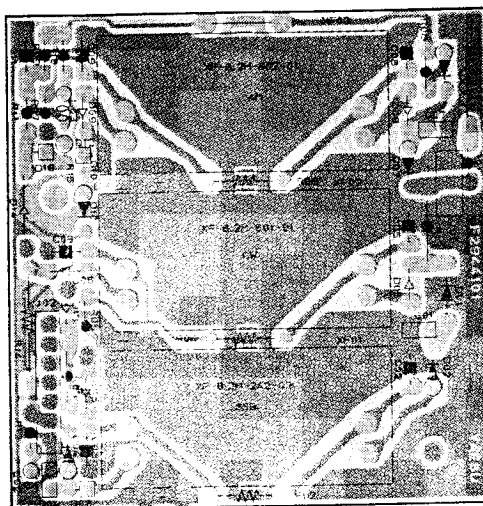


Component side (reverse)


FILTER UNIT CIRCUIT DIAGRAM

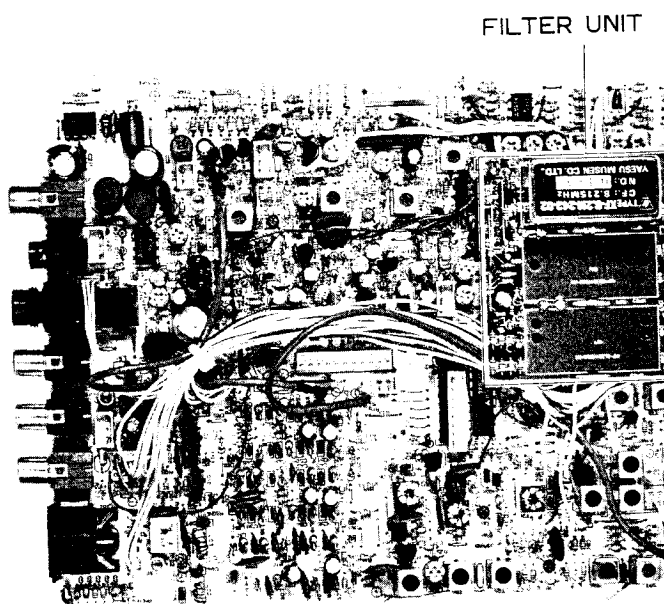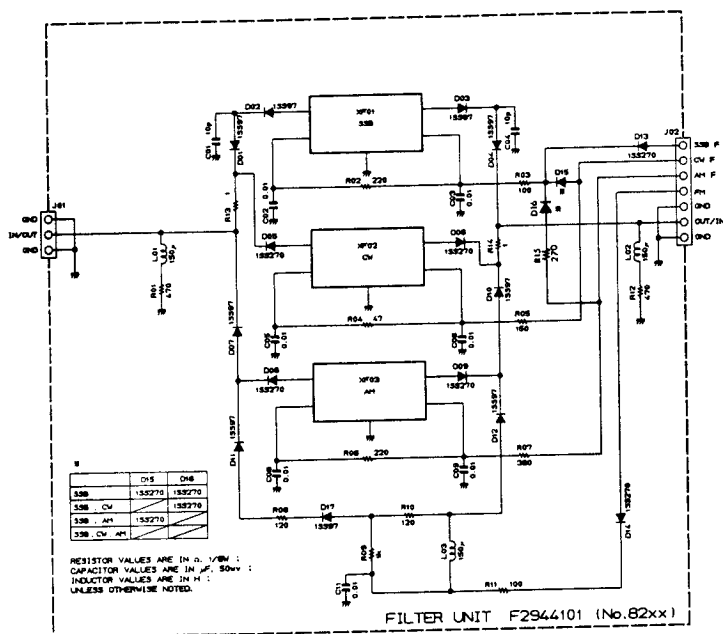

PARTS LAYOUT

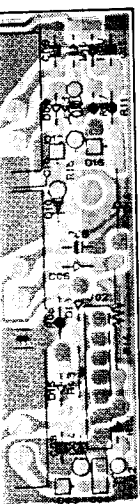


(obverse)

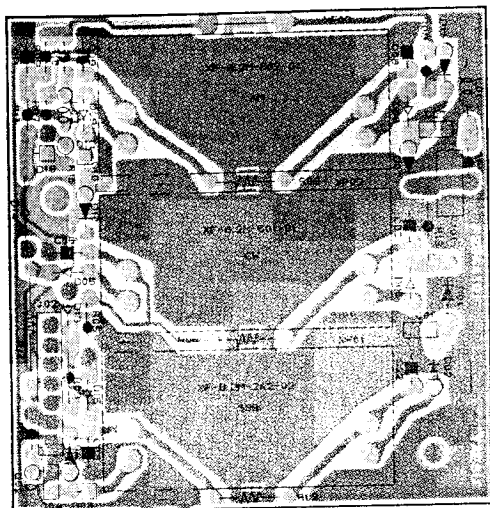


Component side (reverse)

NB UNIT PAH




Component side (obverse)




Component side (reverse)

FILTER CIRCUIT DIAGRAM

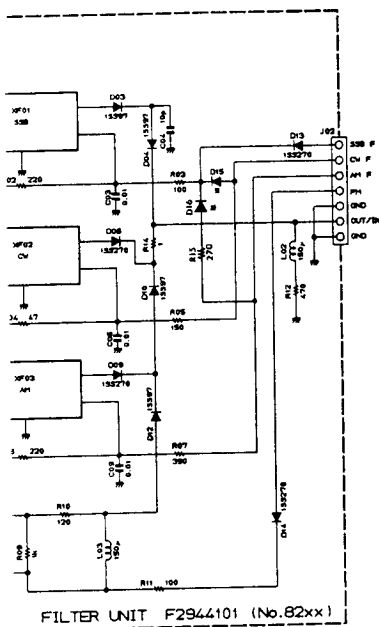


FILTER UNIT

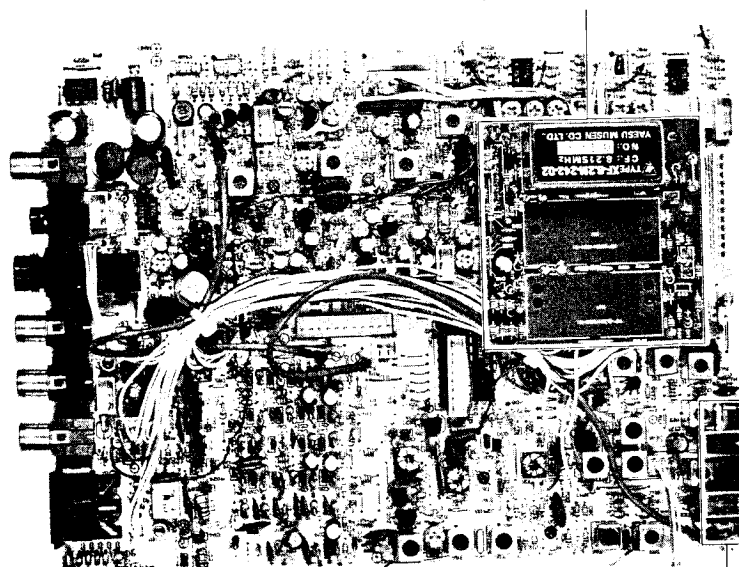

NB UNIT

NB UNIT CIRCUIT

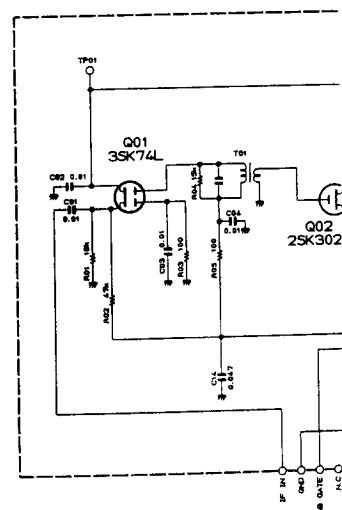


NB UNIT VOLTAGE


	E(S)	C(D)	B(G ₁)
Q8101	7.4	1.5	1.5
Q8102	1.7/0	8.9/8.2	0/0
Q8103	-8.8	6.4	-8.9
Q8104	-9.1	4.3	-9.0

FILTER UNIT & NB UNIT


NB UNIT PARTS LAYOUT




Component side (obverse)




Solder side (obverse)




Component side (reverse)




Solder side (reverse)



3SK74L
(Q8101)




2SK302Y
(Q8102)



2SC3052F
(Q8103,8104)

NB UNIT CIRCUIT DIAGRAM

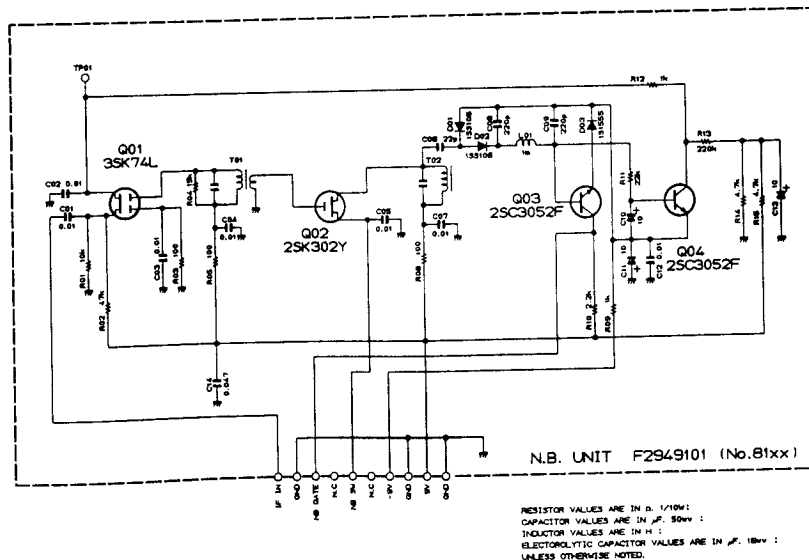


NB UNIT VOLTAGE CHART

(DC VOLT)


	E(S)	C(D)	B(G ₁)	(G ₂)	REMARKS
Q8101	7.4	1.5	1.5	4.3	
Q8102	1.7/0	8.9/8.2	0/0		NB OFF/ON
Q8103	-8.8	6.4	-8.9		
Q8104	-9.1	4.3	-9.0		

NB UNIT

PARTS LAYOUT

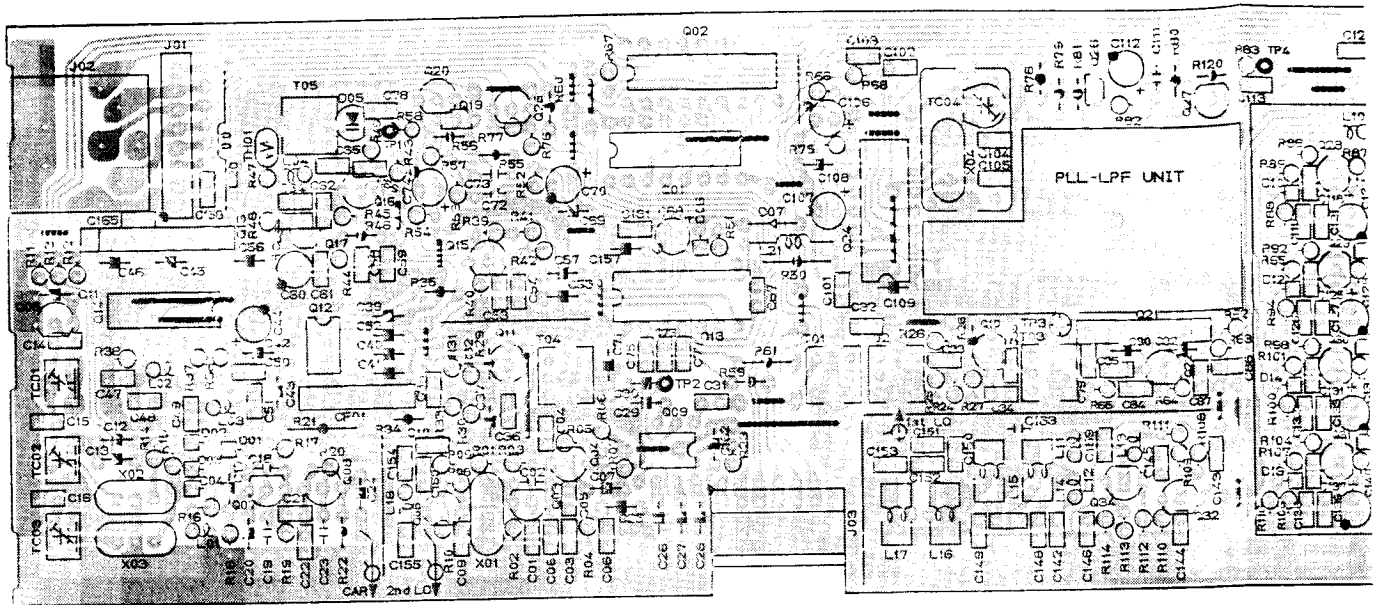


Component side

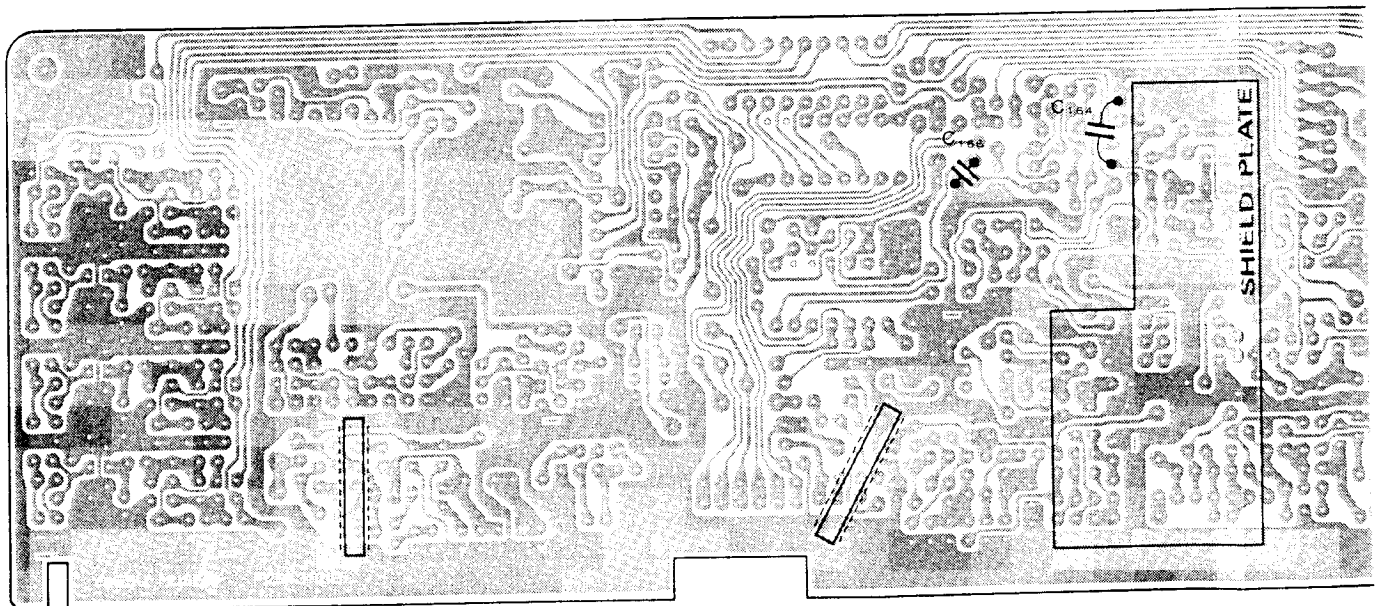


Solder side

LOCAL UNIT IC VOLTAGE CHART

	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17
Q2001	—	—	—	0	4.8	0	0	0	0	0	0	4.8	0	0	5.0	5.0	
Q2002	0	0	4.8	0	0	4.8	0	0	8.8	0	0	0	7.6	0	0	7.6	-0.4
Q2009	6.4	3.8	2.7	0	2.7	3.8	3.8	7.8									
Q2012	6.4	3.8	2.7	0	2.7	3.8	3.8	7.7									
Q2013	0	0	4.9	2.6	2.6	0	4.9	2.5									
Q2014	0	4.9	0	0	0	0	0	0	2.5	0	2.5	2.5	2.3	4.9			
Q2018	-2.4	—	—	—	2.1	2.2	0.5	0	—	—	2.4	5.0	4.2	0			
Q2021	5.9	5.2	4.8	0	2.6	2.6	2.6										
Q2024	-2.4	—	—	—	2.2	1.9	0.5	0	—	—	0.5	4.8	2.0	0			

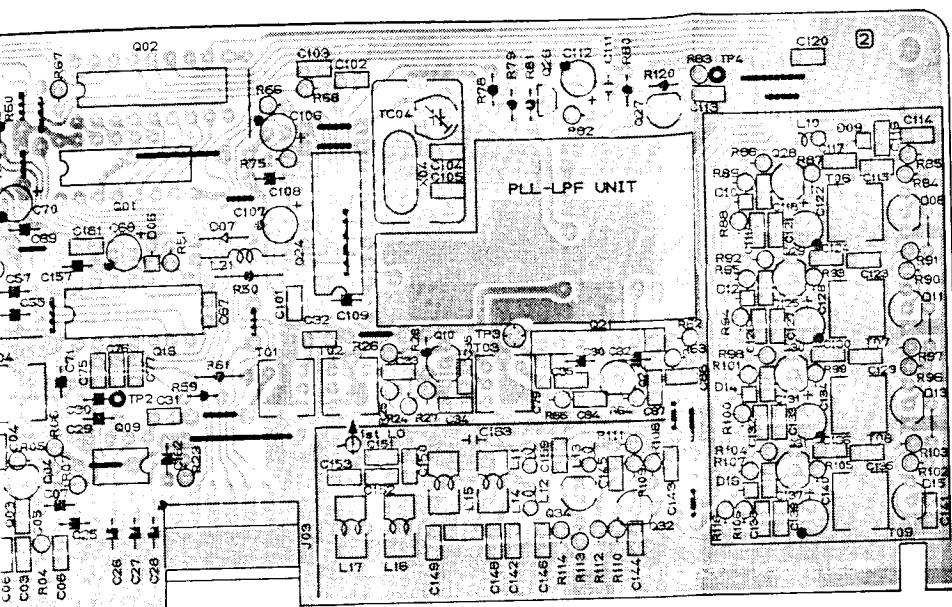

Component side (obverse)

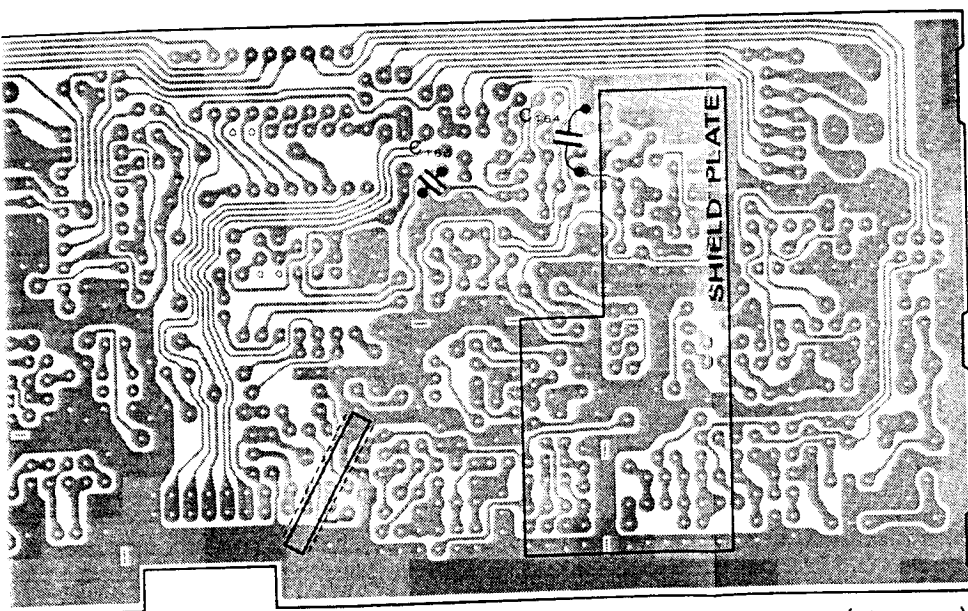


Solder side (obverse)

LOCAL UNIT VOLTAGE CHART

(DC VOLT)

	E (S)	C (D)	B (G)	REMARKS
Q2003	3.1	8.1	3.9	
Q2004	3.5	8.1	4.2	
Q2005	1.4	8.1	2.2	
Q2006	0/0	0.7/0	0/0.7	RX/TX, MODE CW
Q2007	2.0	6.6	2.0	MODE USB
Q2008	1.7	8.0	2.4	MODE USB
Q2010	1.8	8.4	2.5	
Q2011	1.9	8.4	2.6	
Q2015	3.6	8.0	4.2	
Q2016	2.3	8.3	2.9	
Q2017	1.0	8.4	0	
Q2019	8.6	0.5	0.6	
Q2020	0	5.6	0.7	
Q2022	2.5	8.3	3.2	
Q2025	0/0	5.0/0	0/0.6	PLL LOCK/UNLOCK
Q2026	0.8	8.6	0.5	14MHz
Q2027	0.1	5.3	0.8	14MHz
Q2028	2.6	7.1	3.3	3.5MHz
Q2029	2.6	7.1	3.3	28MHz
Q2030	2.6	7.1	3.3	18MHz
Q2031	3.1	7.0	3.9	28MHz
Q2032	2.5	8.3	3.3	
Q2034	2.8	8.7	3.5	



2SC458C (Q2004~2008,
2010,2011,
2015,2025)


2SC535B (Q2003,2016,
2022,2028-
2032)

2SC732TMBL (Q2020,2027)
2SC2053 (Q2034)

LOCAL UNIT IC VOLTAGE CHART

(DC VOLT)

	7	8	9	10	11	12	13	14	15	16	17	18	REMARKS
5	0	0	0	0	0	4.8	0	0	5.0	5.0			14MHz
0	0	0	0	0	0	0	7.6	0	0	7.6	-0.4	0	14MHz, MODE USB
8	0	0	8.8	0	0	0							14MHz, MODE USB
8	3.8	7.8											14MHz, MODE USB
8	3.8	7.7											14MHz, MODE USB
0	4.9	2.5											14MHz, MODE USB
0	0	0	2.5	0	2.5	2.5	2.3	4.9					14MHz, MODE USB
2	0.5	0	—	—	2.4	5.0	4.2	0					14MHz, MODE USB
6	2.6												14MHz, MODE USB
9	0.5	0	—	—	0.5	4.8	2.0	0					14MHz, MODE USB




2SK184Y (Q2019,2026)


2SK

LOCAL UNIT VOLTAGE CHART (DC VOLT)


	E (S)	C (D)	B (G)	REMARKS
Q2003	3.1	8.1	3.9	
Q2004	3.5	8.1	4.2	
Q2005	1.4	8.1	2.2	
Q2006	0/0	0.7/0	0/0.7	RX/TX, MODE CW
Q2007	2.0	6.6	2.0	MODE USB
Q2008	1.7	8.0	2.4	MODE USB
Q2010	1.8	8.4	2.5	
Q2011	1.9	8.4	2.6	
Q2015	3.6	8.0	4.2	
Q2016	2.3	8.3	2.9	
Q2017	1.0	8.4	0	
Q2019	8.6	0.5	0.6	
Q2020	0	5.6	0.7	
Q2022	2.5	8.3	3.2	
Q2025	0/0	5.0/0	0/0.6	PLL LOCK/UNLOCK
Q2026	0.8	8.6	0.5	14MHz
Q2027	0.1	5.3	0.8	14MHz
Q2028	2.6	7.1	3.3	3.5MHz
Q2029	2.6	7.1	3.3	28MHz
Q2030	2.6	7.1	3.3	18MHz
Q2031	3.1	7.0	3.9	28MHz
Q2032	2.5	8.3	3.3	
Q2034	2.8	8.7	3.5	

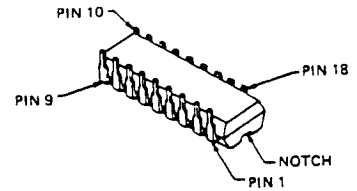

M54564P (Q2002)

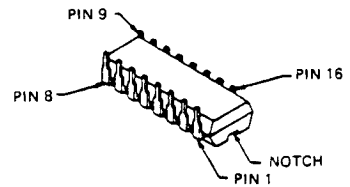


μPD4094BC (Q2001)




CX-7925B (Q2018,2024)


μPD4013BC (Q2014)




SN16913P (Q2009,2012)




M54459L (Q2013)




μPC1037H (Q2021)

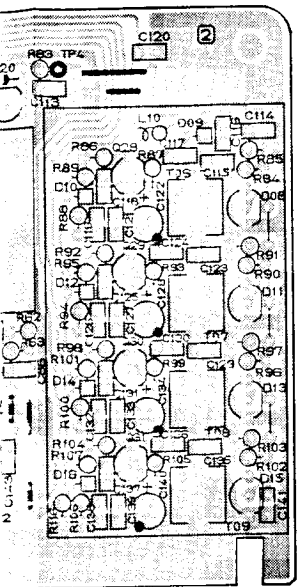

Component side (obverse)

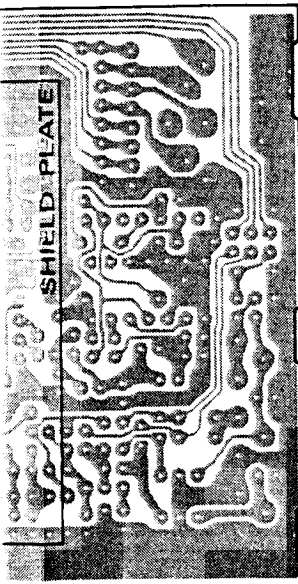

Solder side (obverse)




2SC458C (Q2004~2008,
2010,2011,
2015,2025)


2SC535B (Q2003,2016,
2022,2028-
2032)

2SC732TMBL (Q2020,2027)

2SC2053 (Q2034)




2SK184Y (Q2019,2026)



2SK192AGR (Q2017)


(DC VOLT)

16	17	18	REMARKS
5.0			14MHz
7.6	-0.4	0	14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB
			14MHz, MODE USB

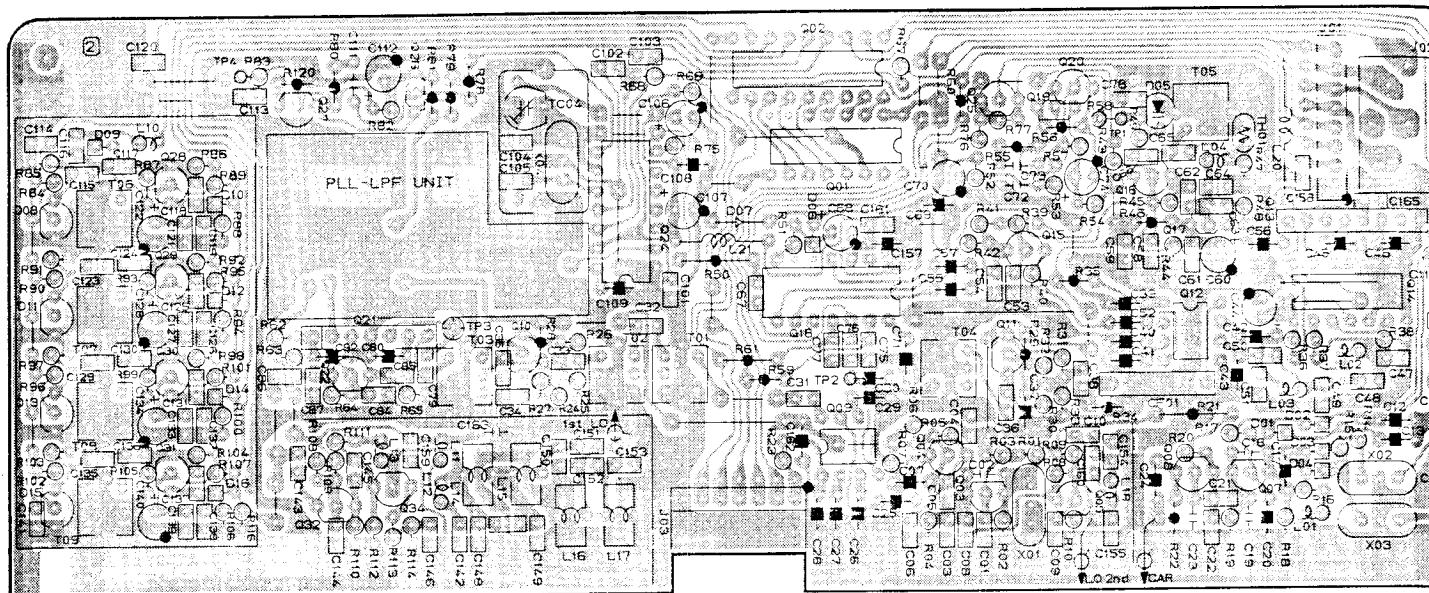


Component side (reverse)


PLL-LPF UNIT PARTS LAYOUT




Component side (obverse)




Solder side (obverse)




Component side (reverse)





Solder side (reverse)




2SC2620QB (Q7023)

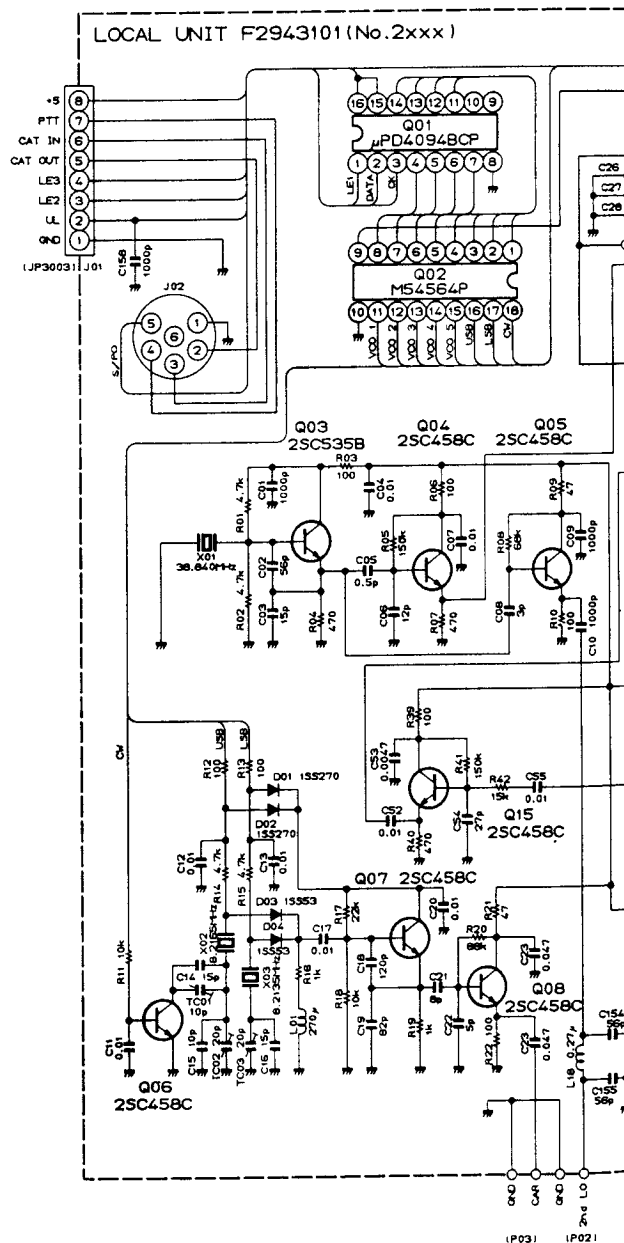


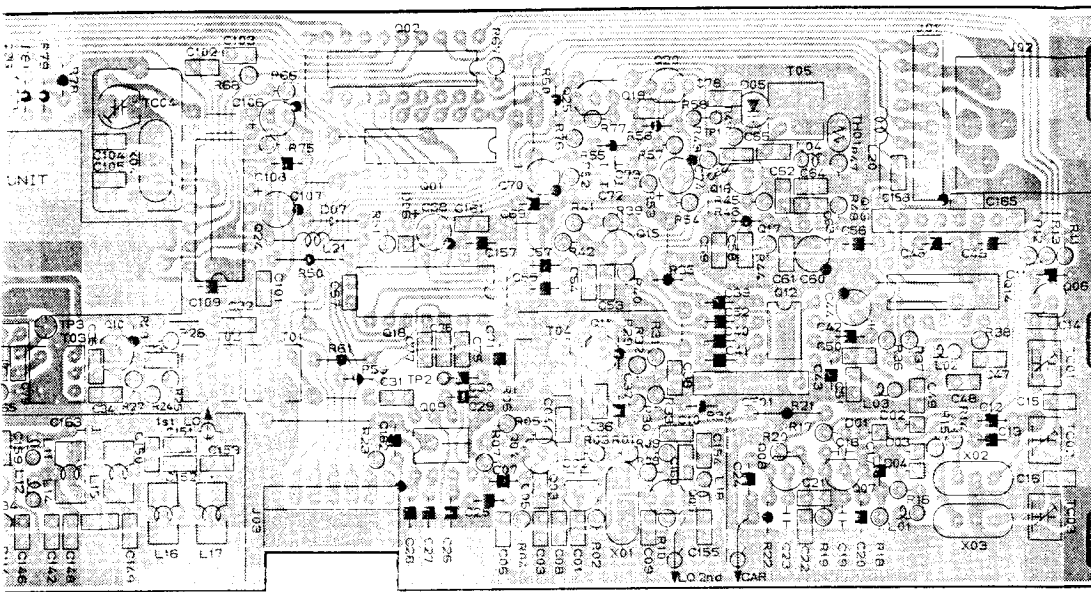

PARTS LAYOUT




Solder side (obverse)



Solder side (reverse)

026200B (Q7023)


LOCAL UNIT F2943101 (No.2xxx)

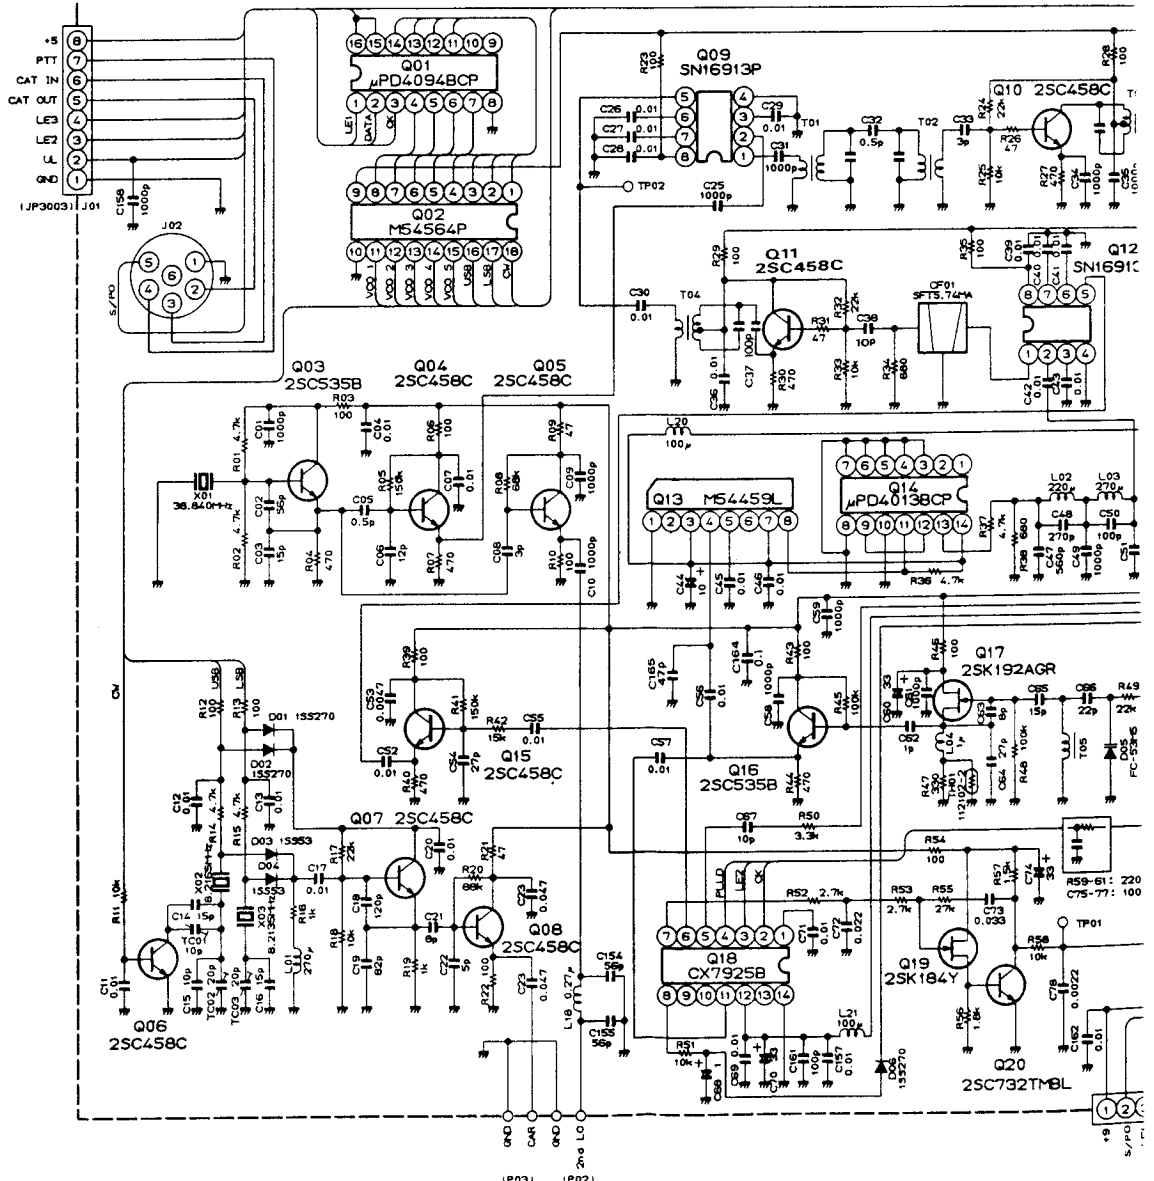


IP031 IP021

LOCAL UNIT


PLL-LPF UNIT

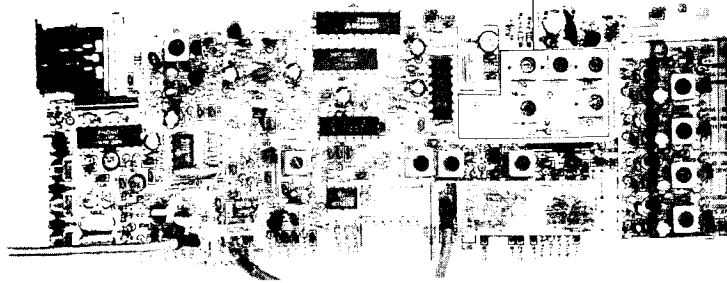


CIRCUIT DIAGRAM

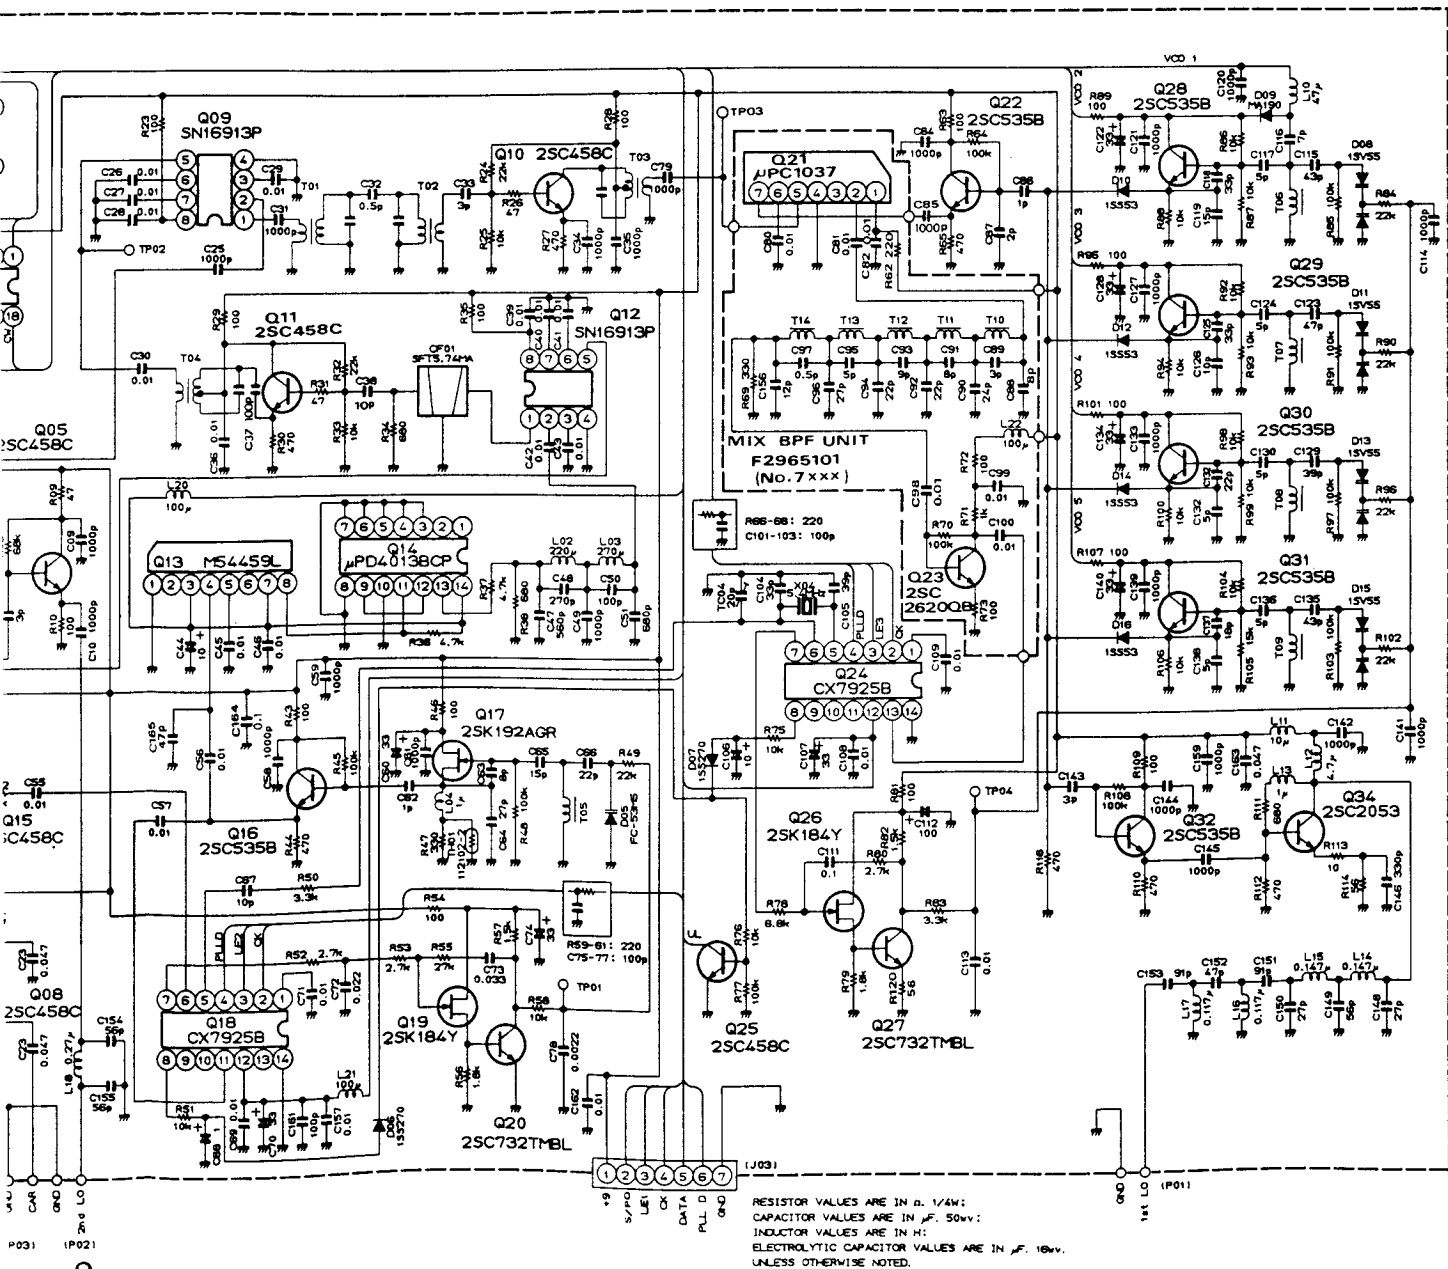


PARTS LAYOUT

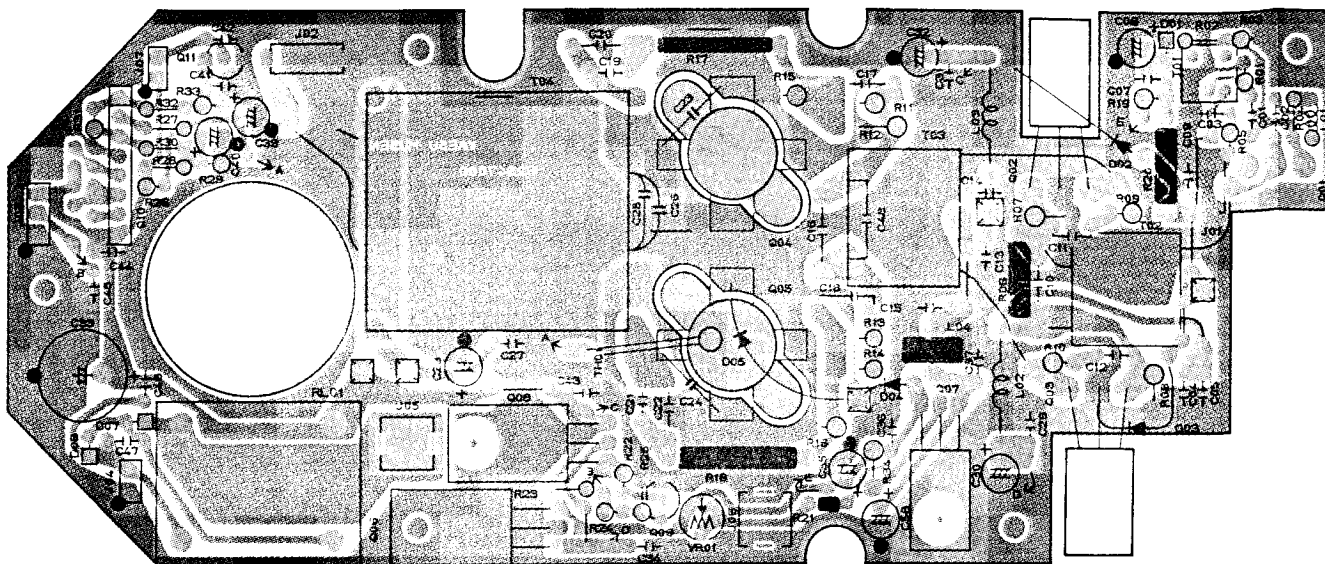


Component side (obverse)



2SC3240 (Q5004,5005)




M5218L (Q5010)





2SB824R (Q5008)


2SC2166 (Q5001)



2SC3133 (Q5002,5003)


 μ PC7808H (Q5006)

2SD882Q (Q5007)




2SC458D (Q5009)

2SC2001 (Q5011)

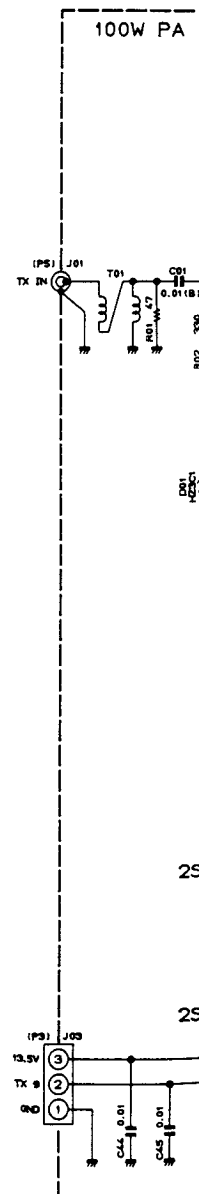

CIRCUIT

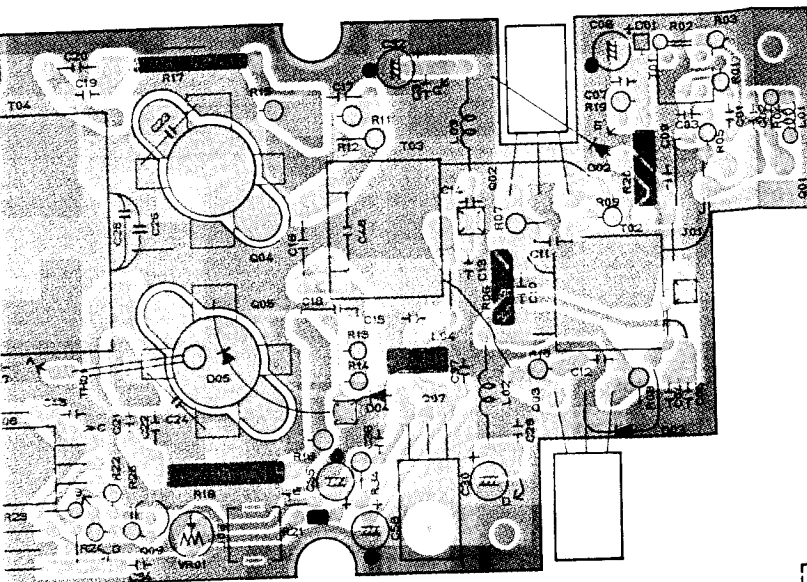


PA UNIT VOLTAGE CHART
(DC VOLT)


	E	C	B	REMARKS
Q5001	0/0.4	0/13.4	0/1.2	RX/TX
Q5002	0/0	13.5/13.5	0/0.7	RX/TX
Q5003	0/0	13.5/13.5	0/0.7	RX/TX
Q5004	0/0	13.5/13.5	0/0.6	RX/TX
Q5005	0/0	13.5/13.5	0/0.6	RX/TX
Q5007	0.4/1.4	0/7.6	0/0.7	RX/TX
Q5008	13.5/13.5	0.5/13.4	13.5/12.7	RX/TX
Q5009	0/0	13.5/0.1	0/0.7	RX/TX
Q5010	0	13.5	0.2	

PA UNIT IC VOLTAGE CHART


	1 (IN)	2 (GND)	3 (OUT)	4	5	6	7
Q5006	0.4/13.4	0/0	0/8.0				
Q5010	1.4/1.3	40-70/10-30	2.8/3.1	0/0	-	-	-




M5218L (Q5010)




2SC3133 (Q5002,5003)



2SD882Q (Q5007)



2SC458D (Q5009)
2SC2001 (Q5011)

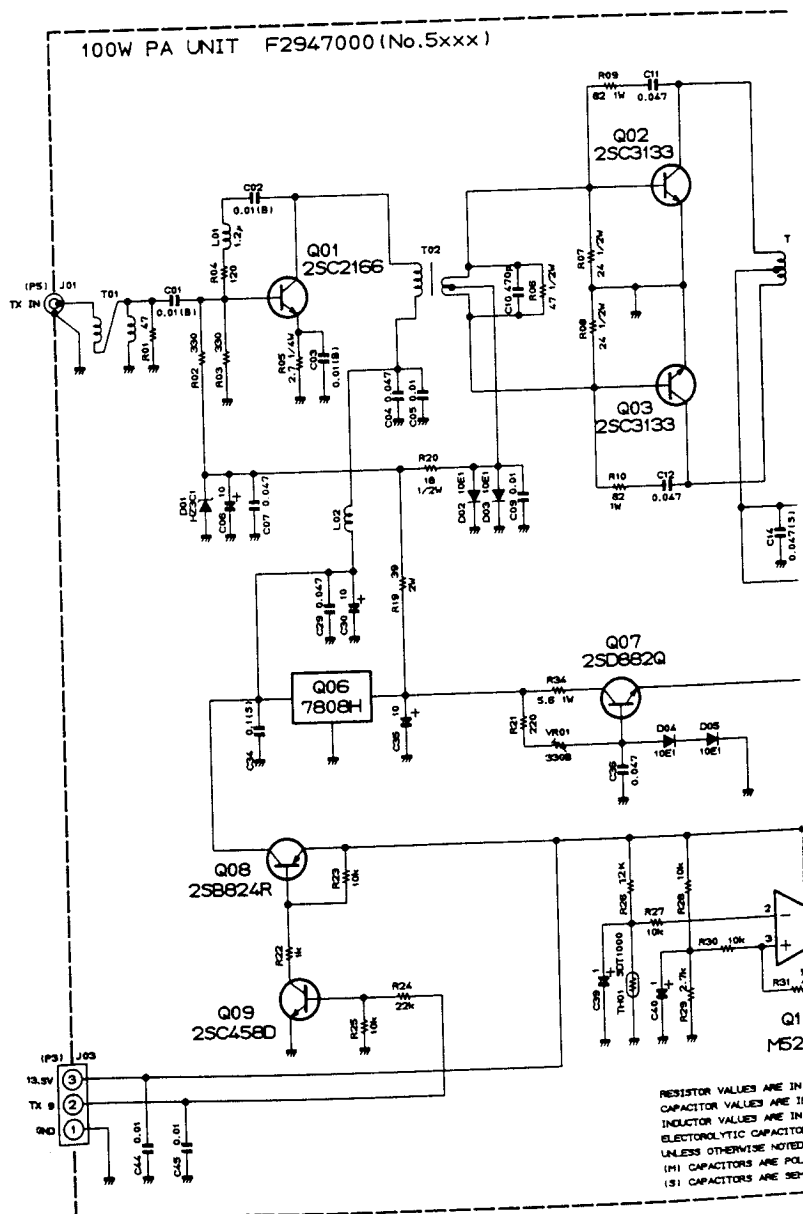


CIRCUIT DIAGRAM

PA UNIT VOLTAGE CHART
(DC VOLT)

	E	C	B	REMARKS
Q5001	0/0.4	0/13.4	0/1.2	RX/TX
Q5002	0/0	13.5/13.5	0/0.7	RX/TX
Q5003	0/0	13.5/13.5	0/0.7	RX/TX
Q5004	0/0	13.5/13.5	0/0.6	RX/TX
Q5005	0/0	13.5/13.5	0/0.6	RX/TX
Q5007	0.4/1.4	0/7.6	0/0.7	RX/TX
Q5008	13.5/13.5	0.5/13.4	13.5/12.7	RX/TX
Q5009	0/0	13.5/0.1	0/0.7	RX/TX
Q5010	0	13.5	0.2	


PA UNIT IC VOLTAGE CHART (DC VOLT)

	1 (IN)	2 (GND)	3 (OUT)	4	5	6	7	8	REMARKS
Q5006	0.4/13.4	0/0	0/8.0						RX/TX
Q5010	1.4/1.3	4.0-7.0/1.0-3.0	2.8/3.1	0/0	--	--	--	13.5/13.5	FAN OFF/ON

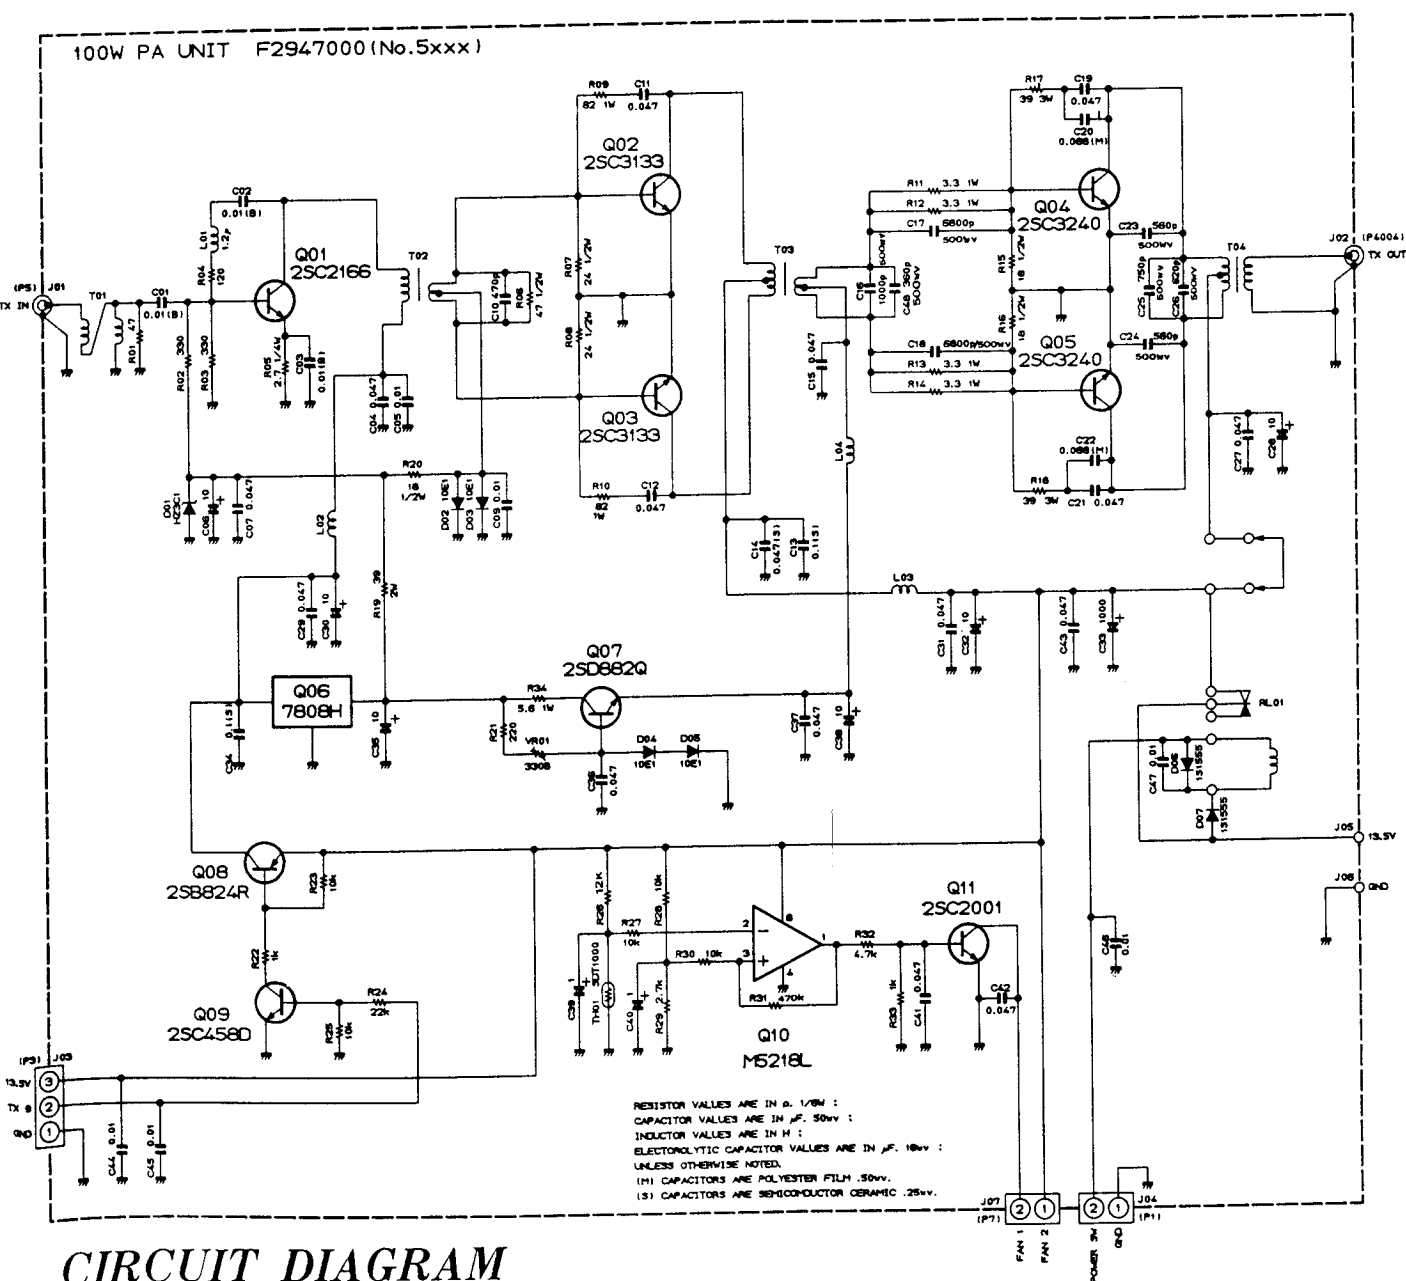


CIRCUIT DIAGRAM

PARTS LAYOUT

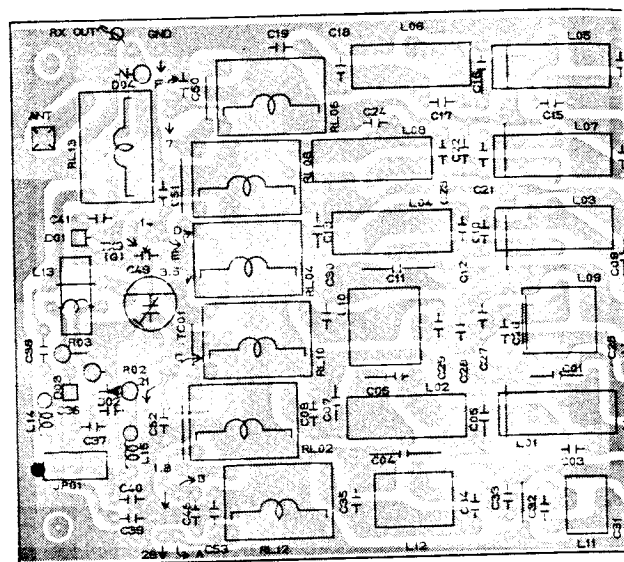


Component

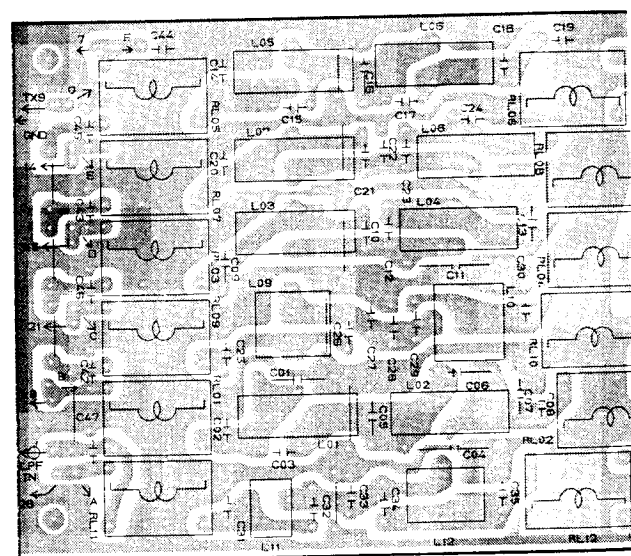


Component


PARTS LAYOUT

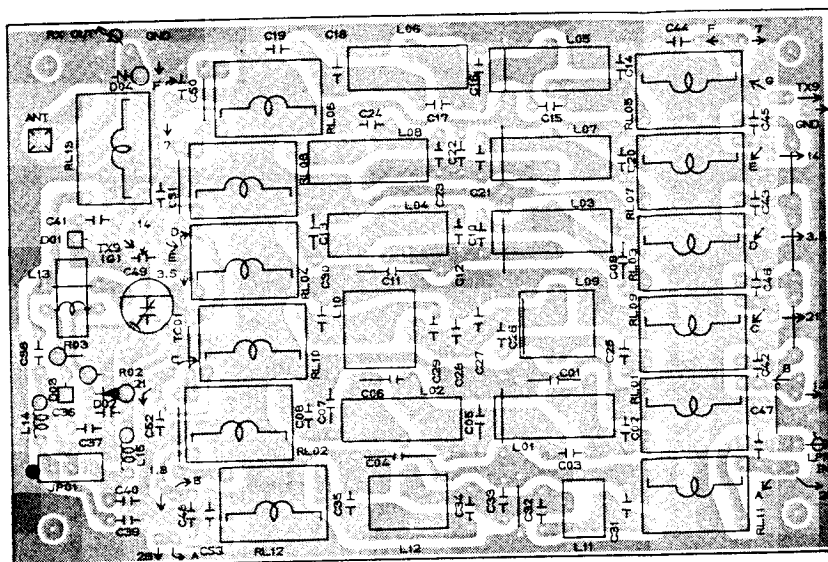

Component side (obverse)

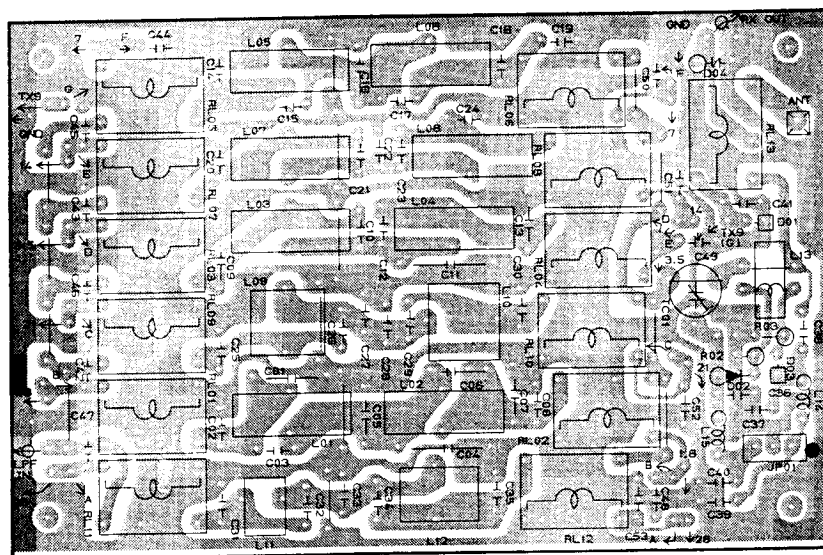


Component side (reverse)

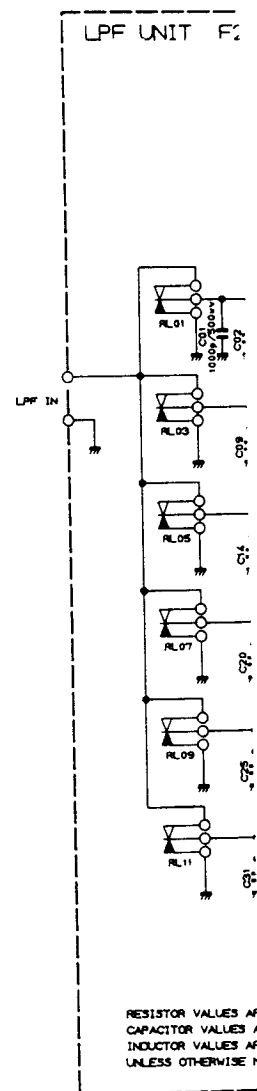


CIRCUIT


LPF UNIT

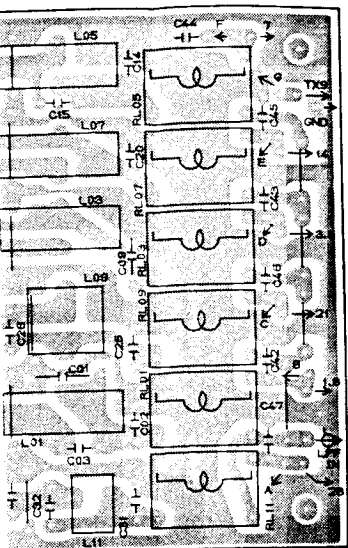

component side (obverse)

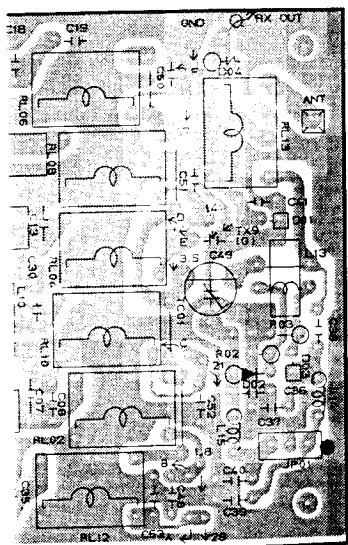


component side (reverse)

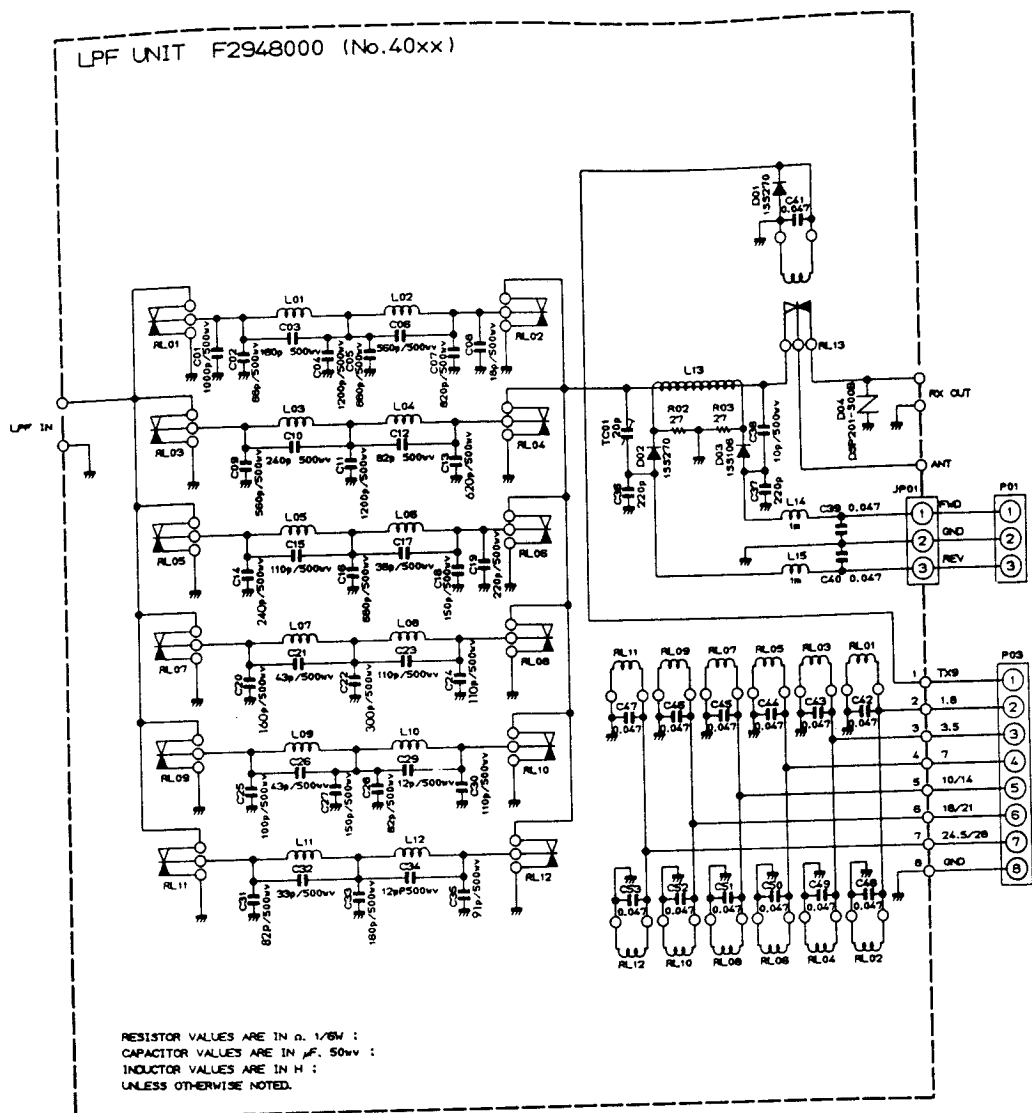


CIRCUIT DIAGRAM


DISPLAY UNIT


PARTS LAYOUT

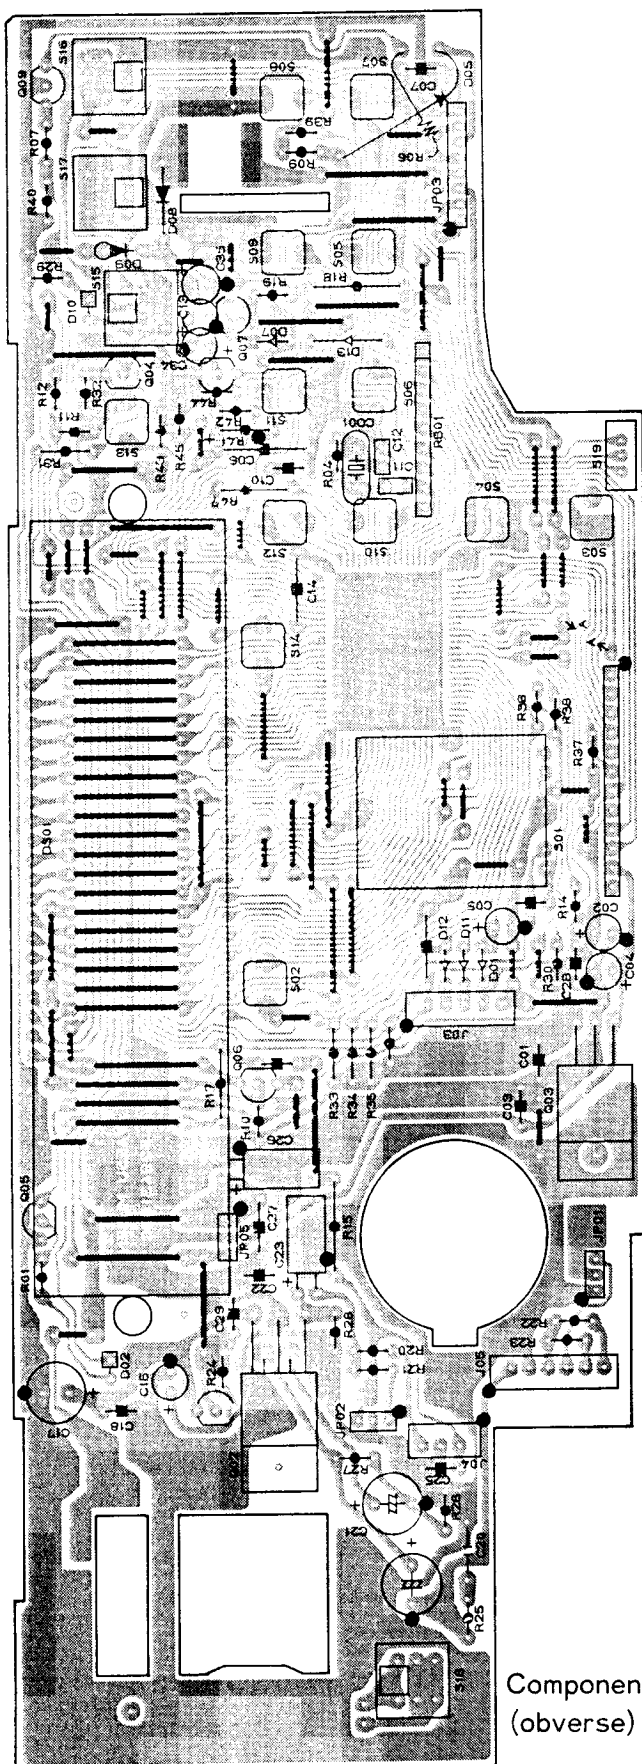


Component side
(obverse)

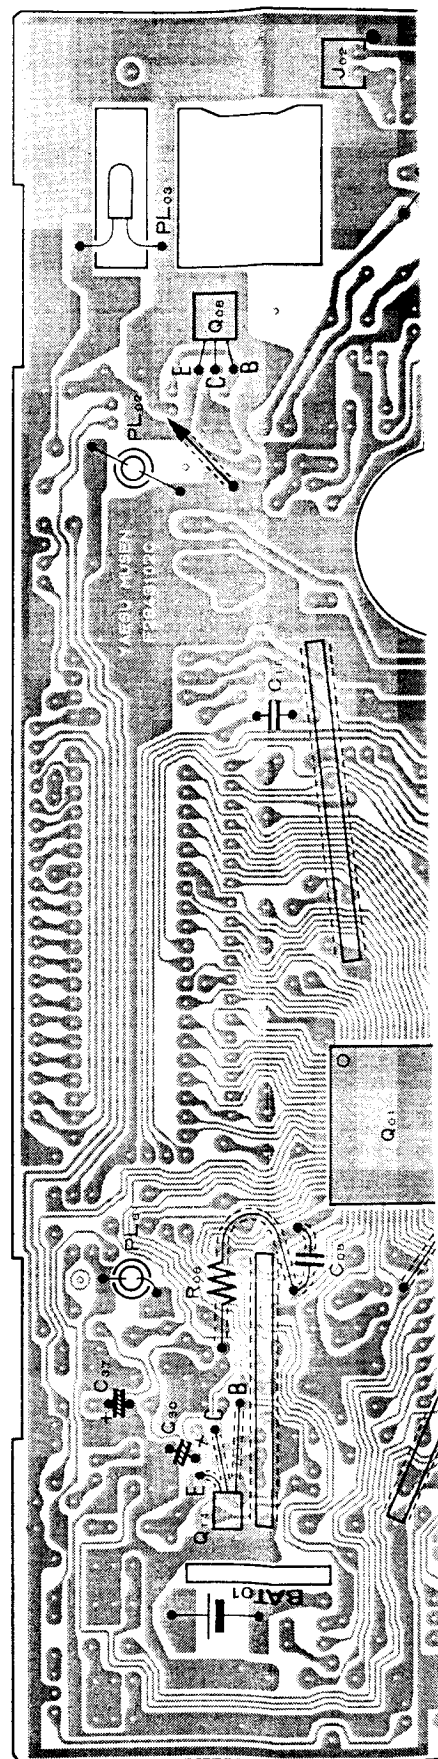



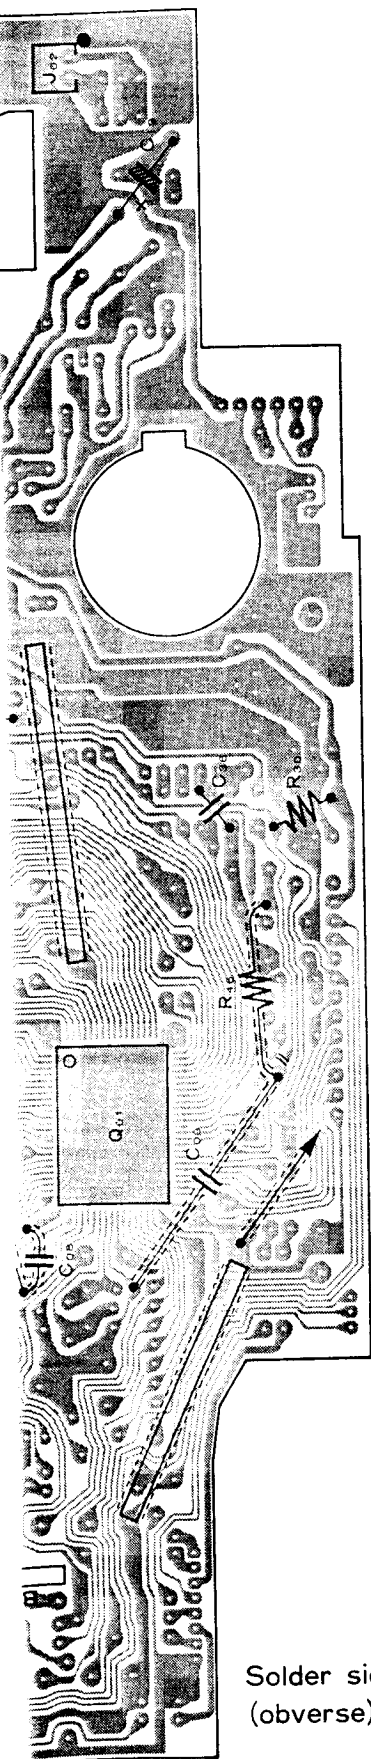


Solder side
(obverse)

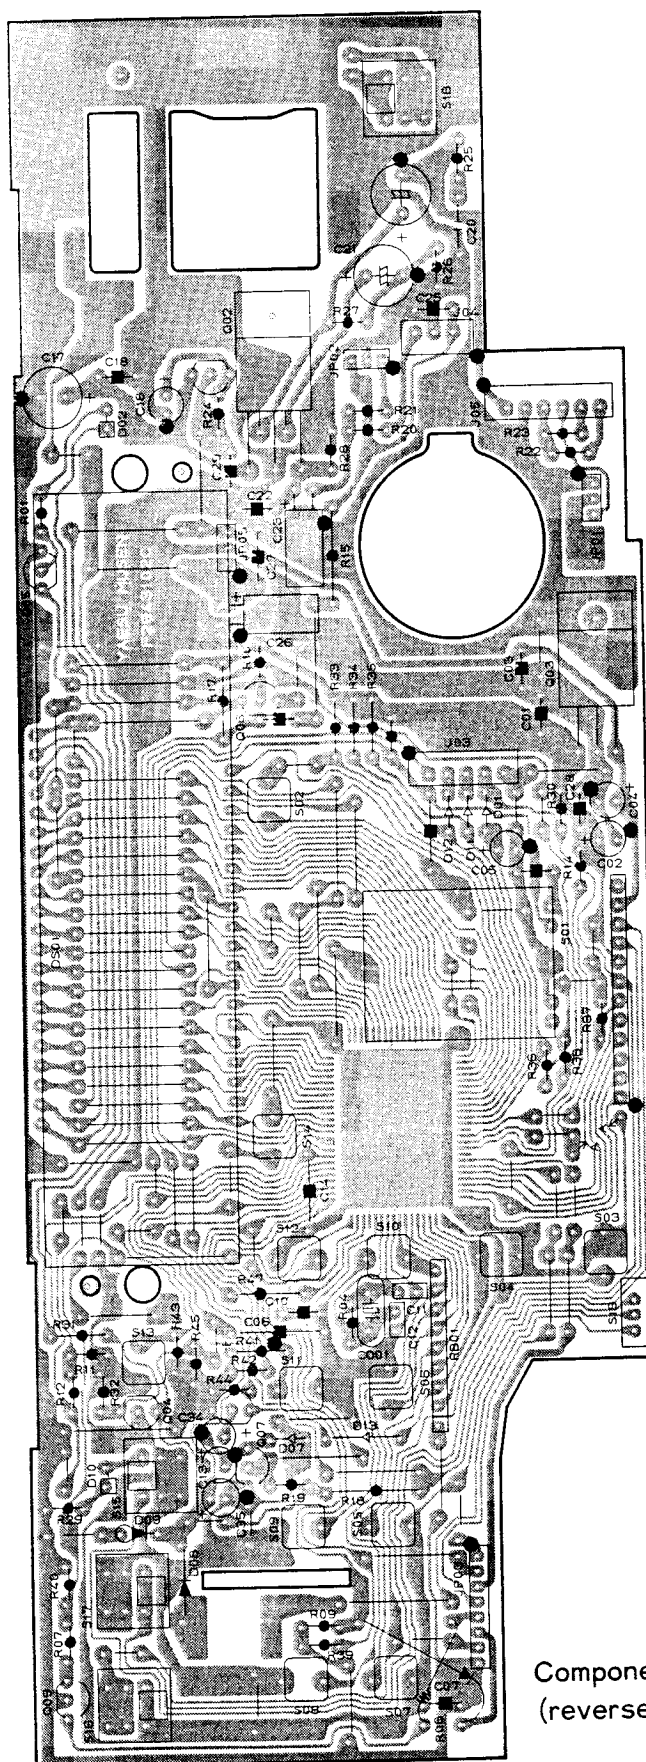

Component side
(reverse)

RESISTOR VALUES ARE IN
CAPACITOR VALUES ARE IN
ELECTROLYTIC CAPACITORS
UNLESS OTHERWISE NOTED.
(M)CAPACITORS ARE POLYE
(S)CAPACITORS ARE SEMIC
(T)CAPACITORS ARE TANTA





2SC458 (Q3009)
2SD667C (Q3008)

COLLECT


BASE -

BA1A4f
BA1A4f
BN1A4f

CIRCUIT DIAGRAM

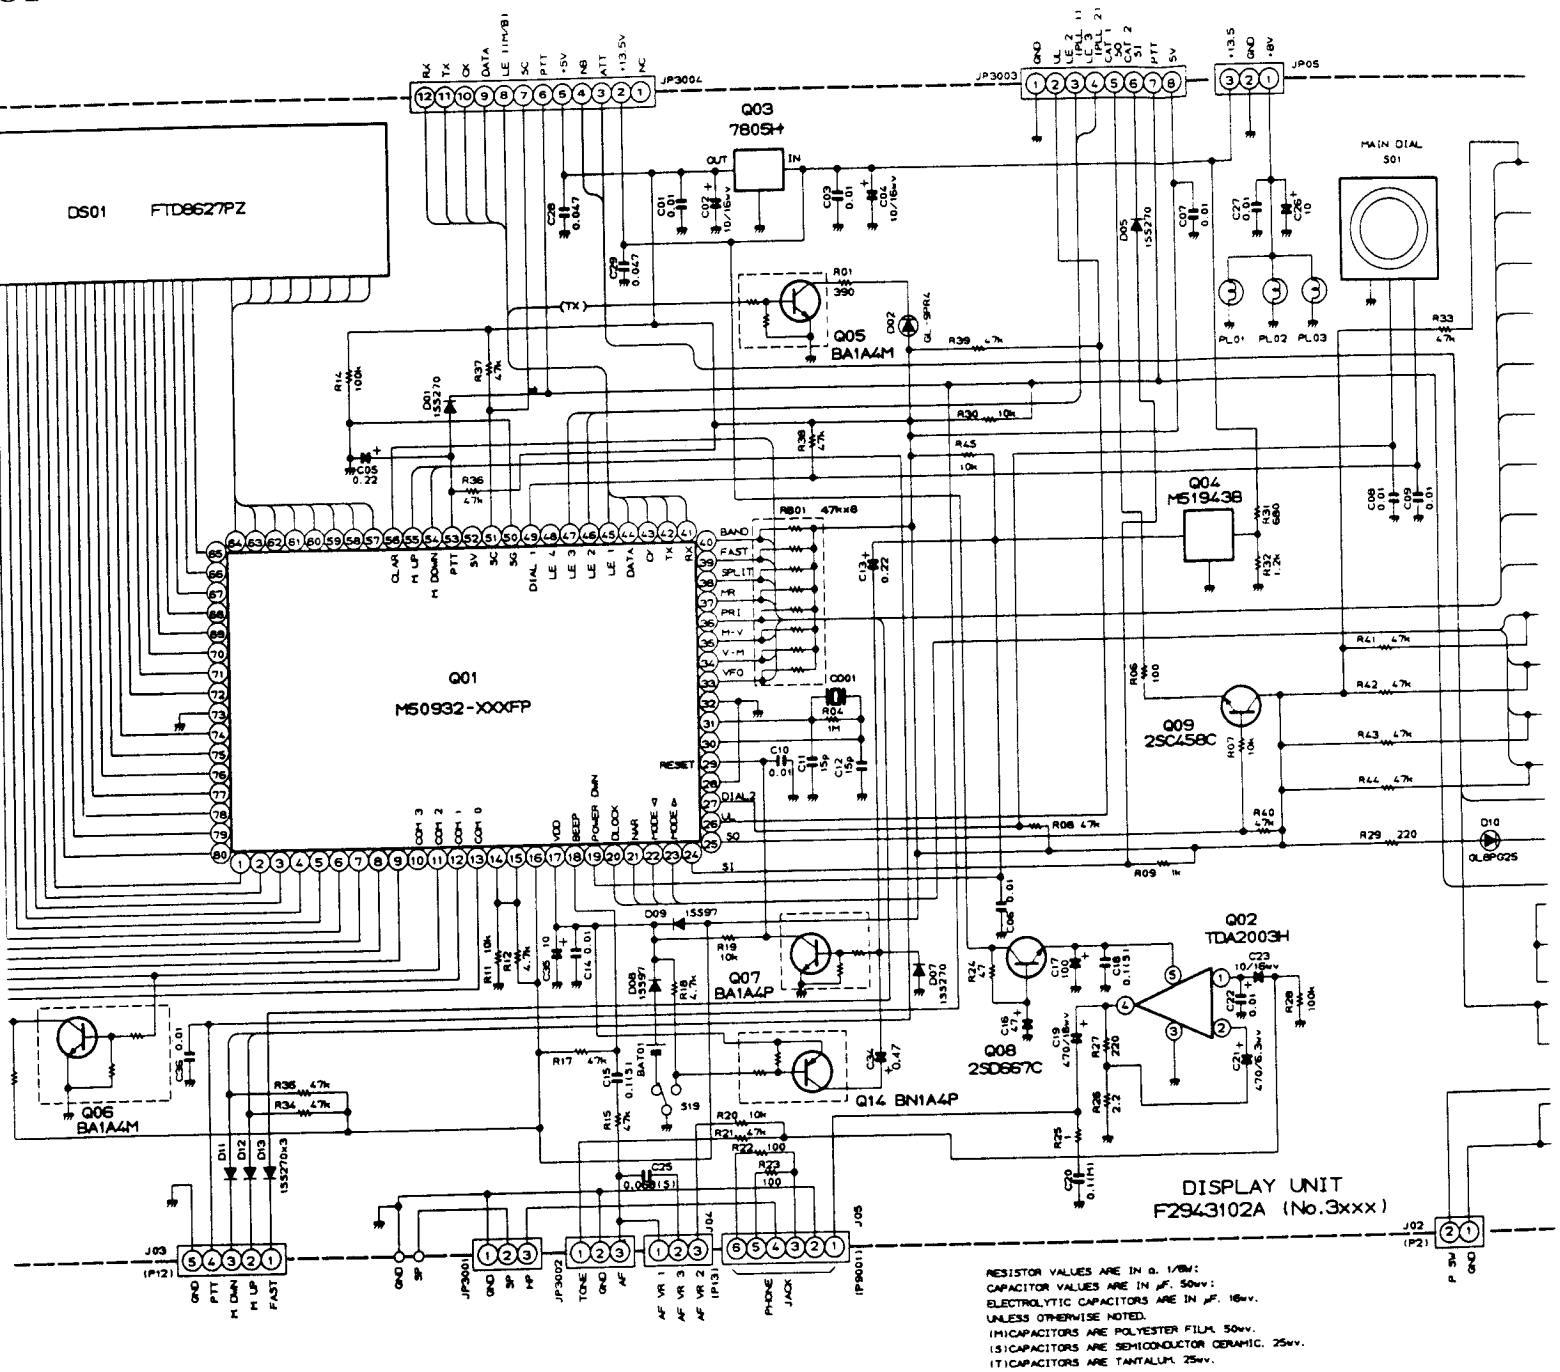

2SC458 (Q3009)
2SD667C (Q3008)



BA1A4M (Q3005,3006)
BA1A4P (Q3007)
BN1A4P (Q3014)

M51943B

DISPLAY UNIT VOLTAGE CHART


(DC VOLT)

	E	C	B	REMARKS
Q3005	0/0	3.5/0	0/4.5	RX/TX
Q3006	2.7	0.8	0	
Q3007	0	4.6	0	
Q3008	12.7	13.4	13.4	
Q3009	4.2	5.0	4.6	
Q3014	4.6	0	4.0	


DISPLAY UNIT VOLTAGE CHART

(DC VOLT)


	1 (IN)	2 (GND)	3 (OUT)	4	5	REMARKS
Q3002	0.7	0.1	0	4.8	12.7	
Q3003	13.5	0	5.0			
Q3004	8.3	0	5.0			

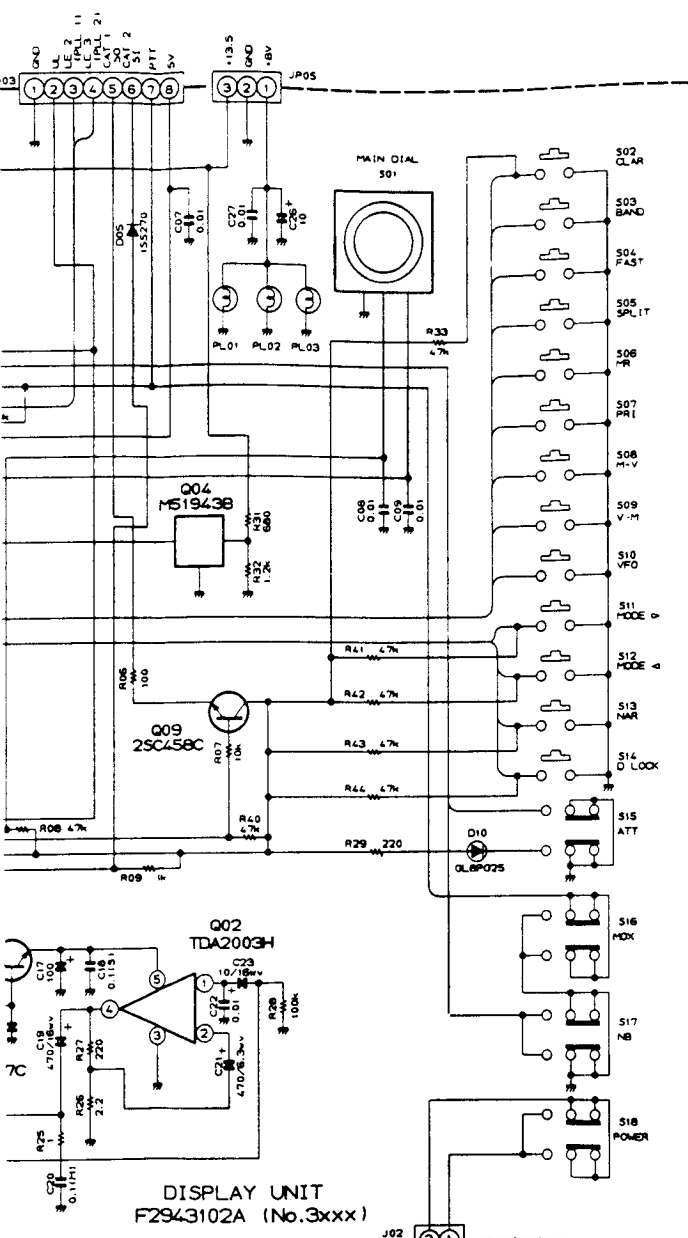


OR VALUES ARE IN Ω 1/10W:
 TOR VALUES ARE IN μ F. 50Vv:
 POLYTYC CAPACITORS ARE IN μ F. 16Vv.
 ; OTHERWISE NOTED.
 ACITORS ARE POLYESTER FILM. 50Vv.
 ACITORS ARE SEMICONDUCTOR CERAMIC. 25Vv.
 ACITORS ARE TANTALUM. 25Vv.

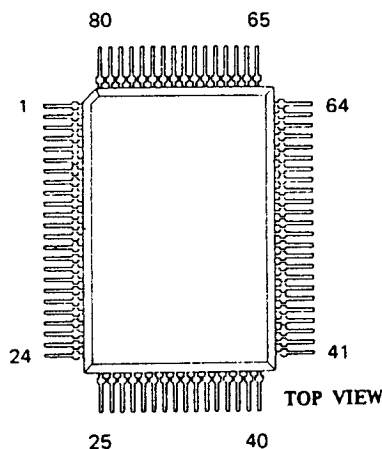


M50932-501FP (Q3001)




TDA2003H (Q3002)




BA1A4M (Q3005,3006)
 BA1A4P (Q3007)
 BN1A4P (Q3014)




M51943BSL (Q3004)




μ PC7805H (Q3003)

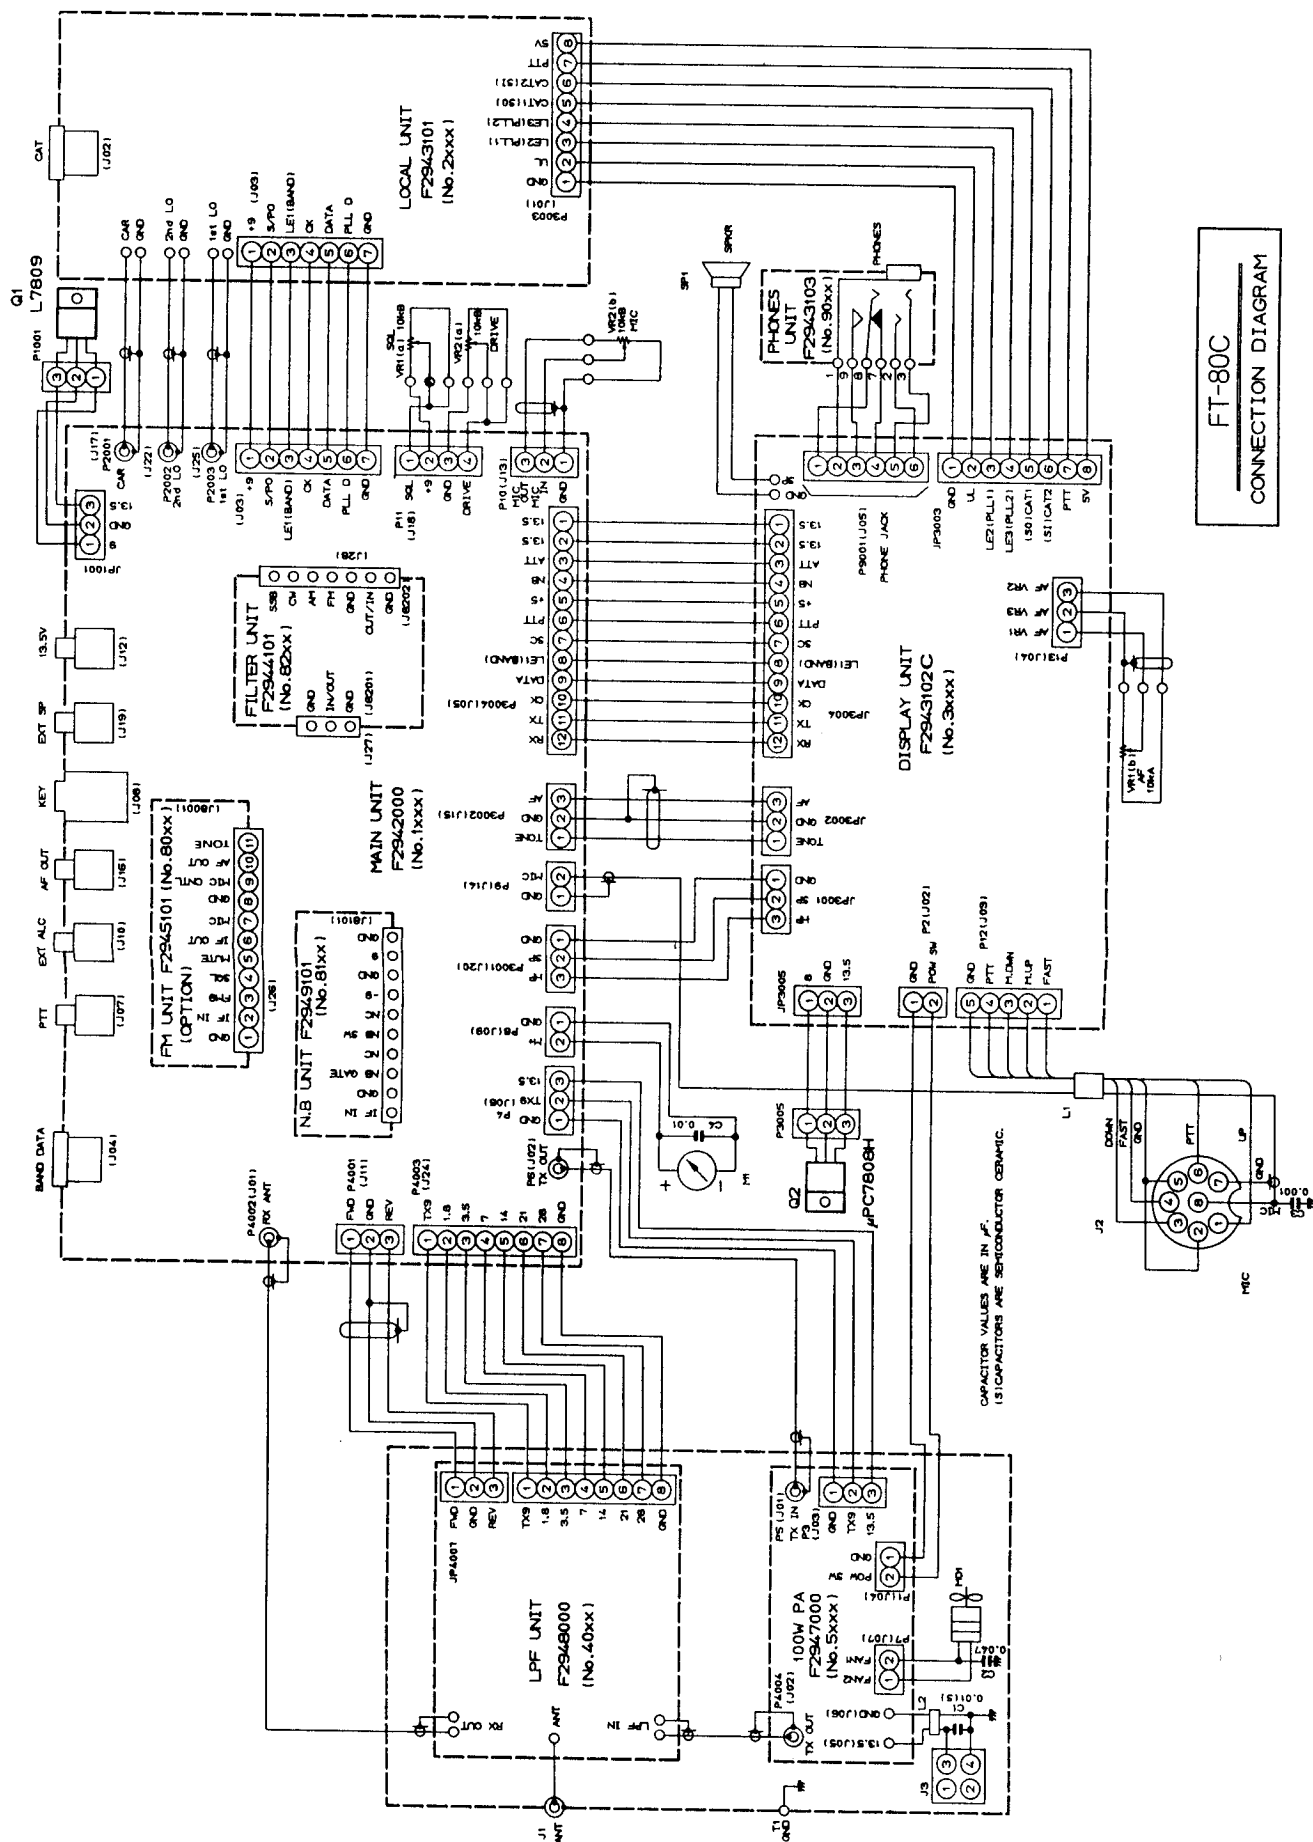


TRANSMIT

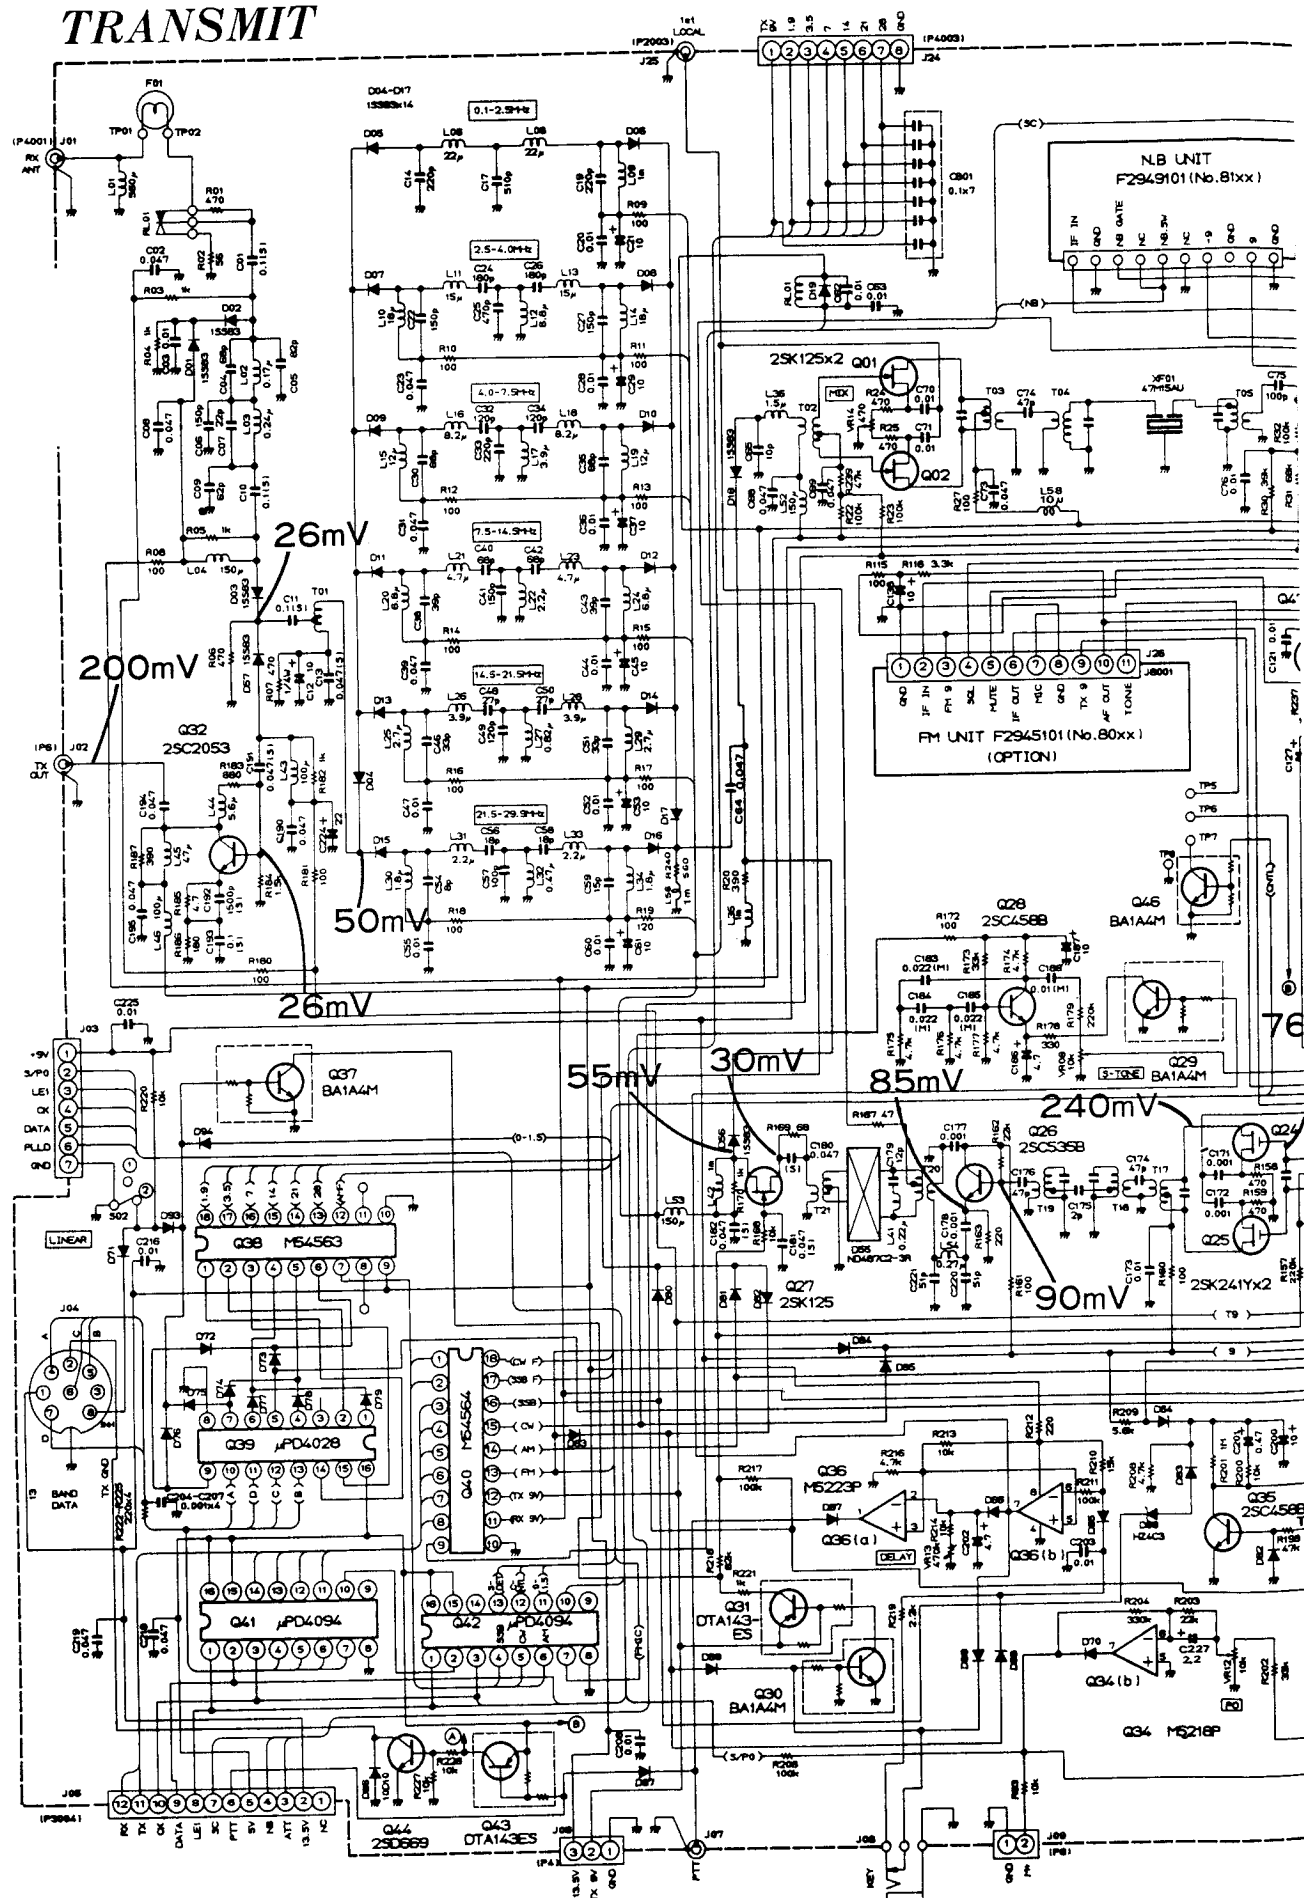

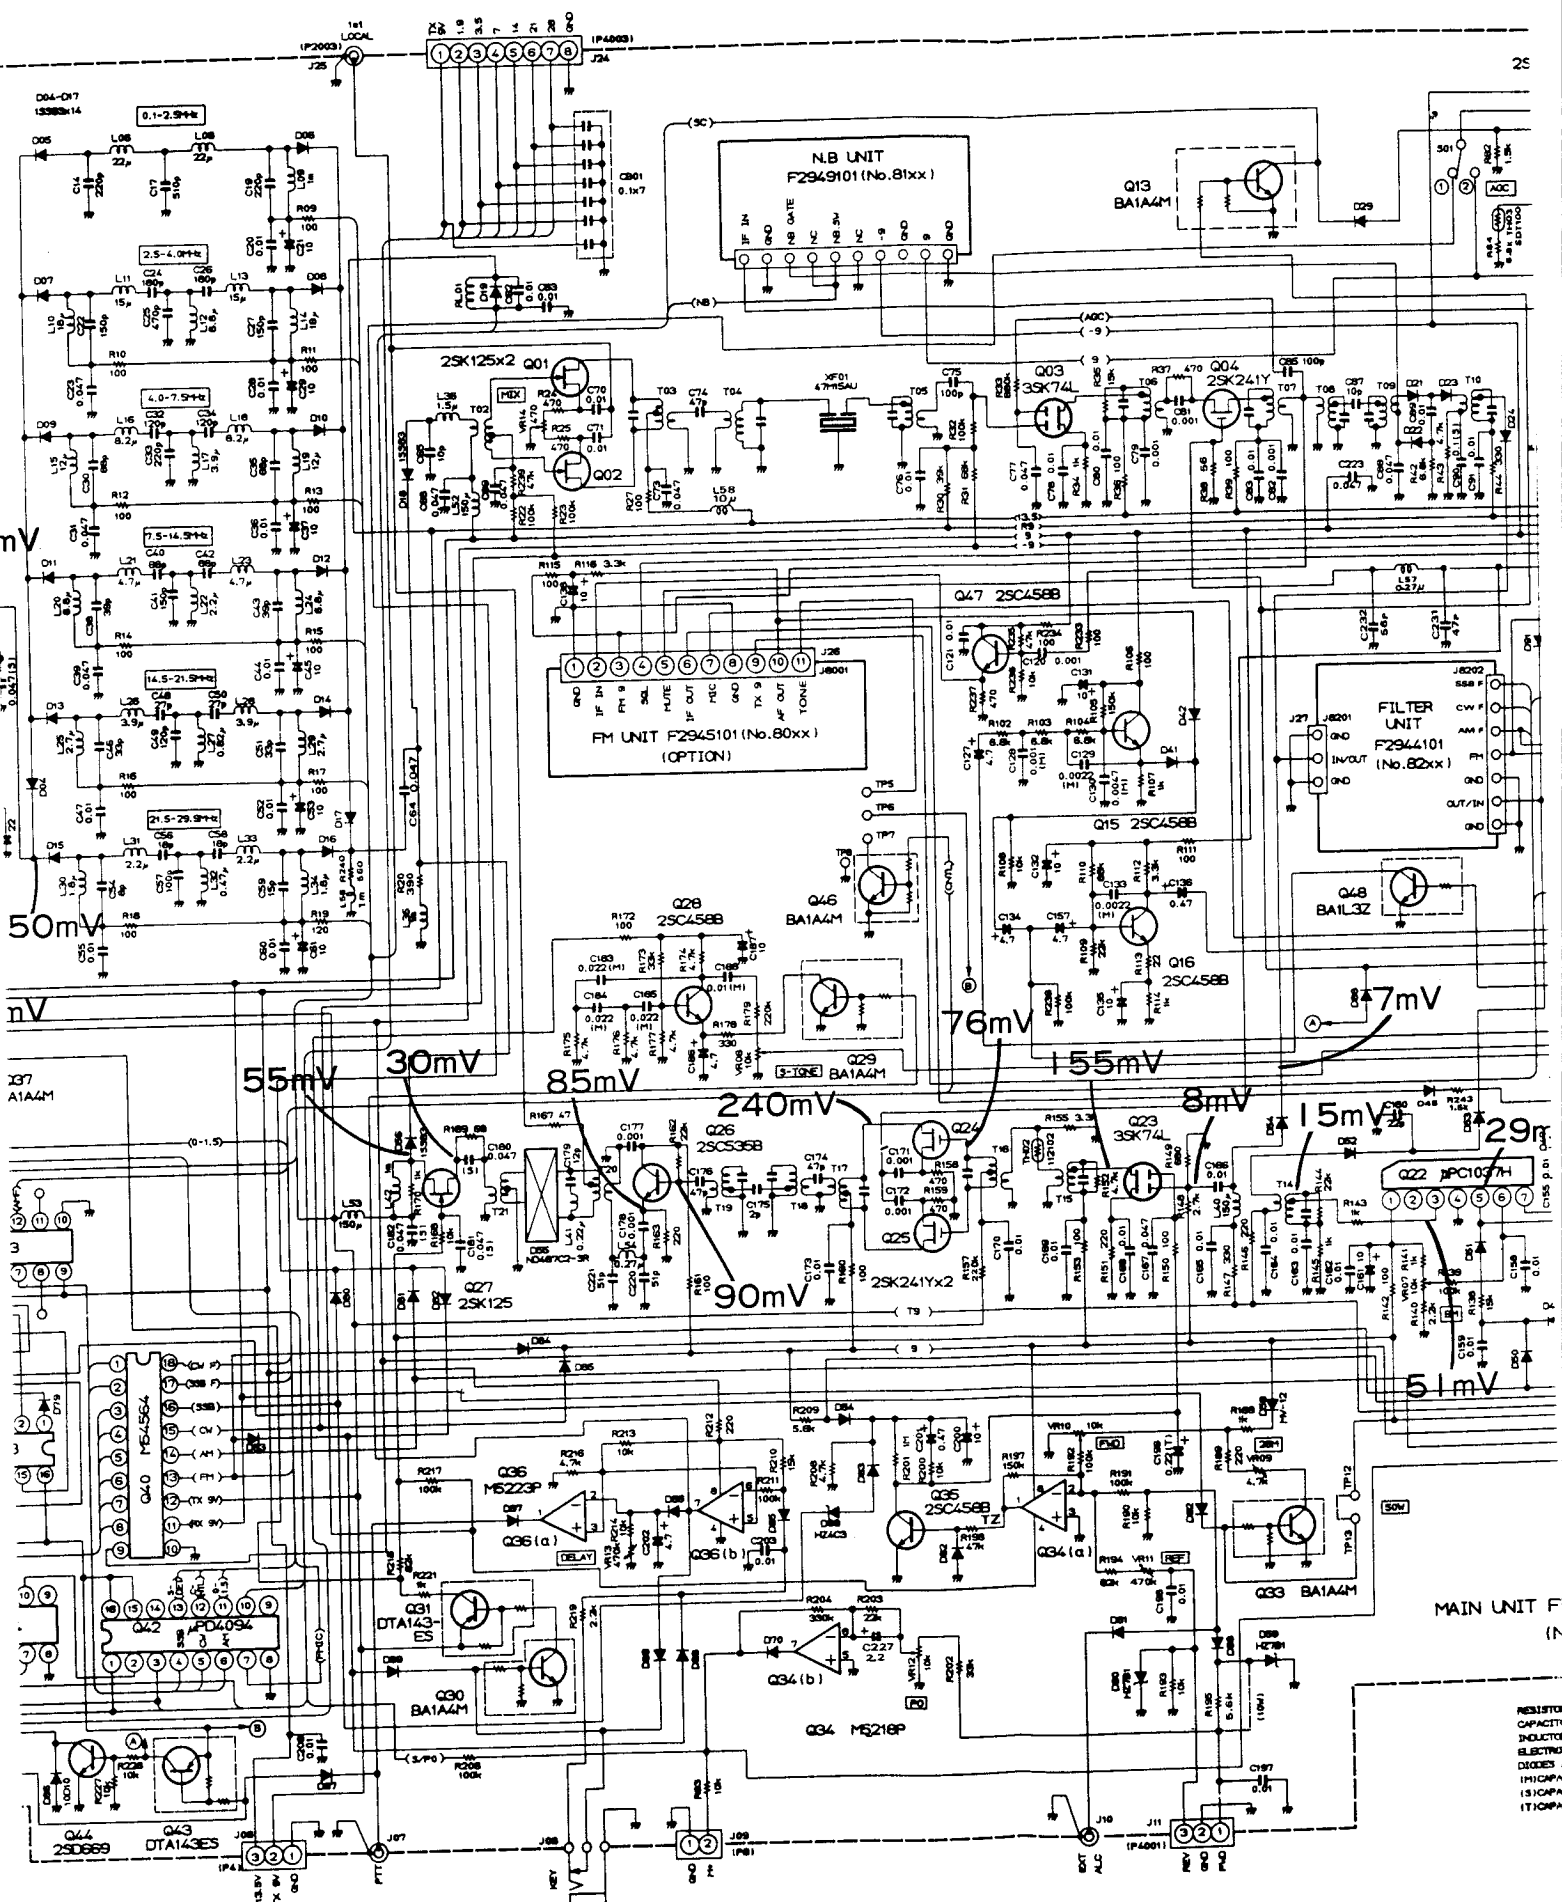



LEVEL DIAGRAM

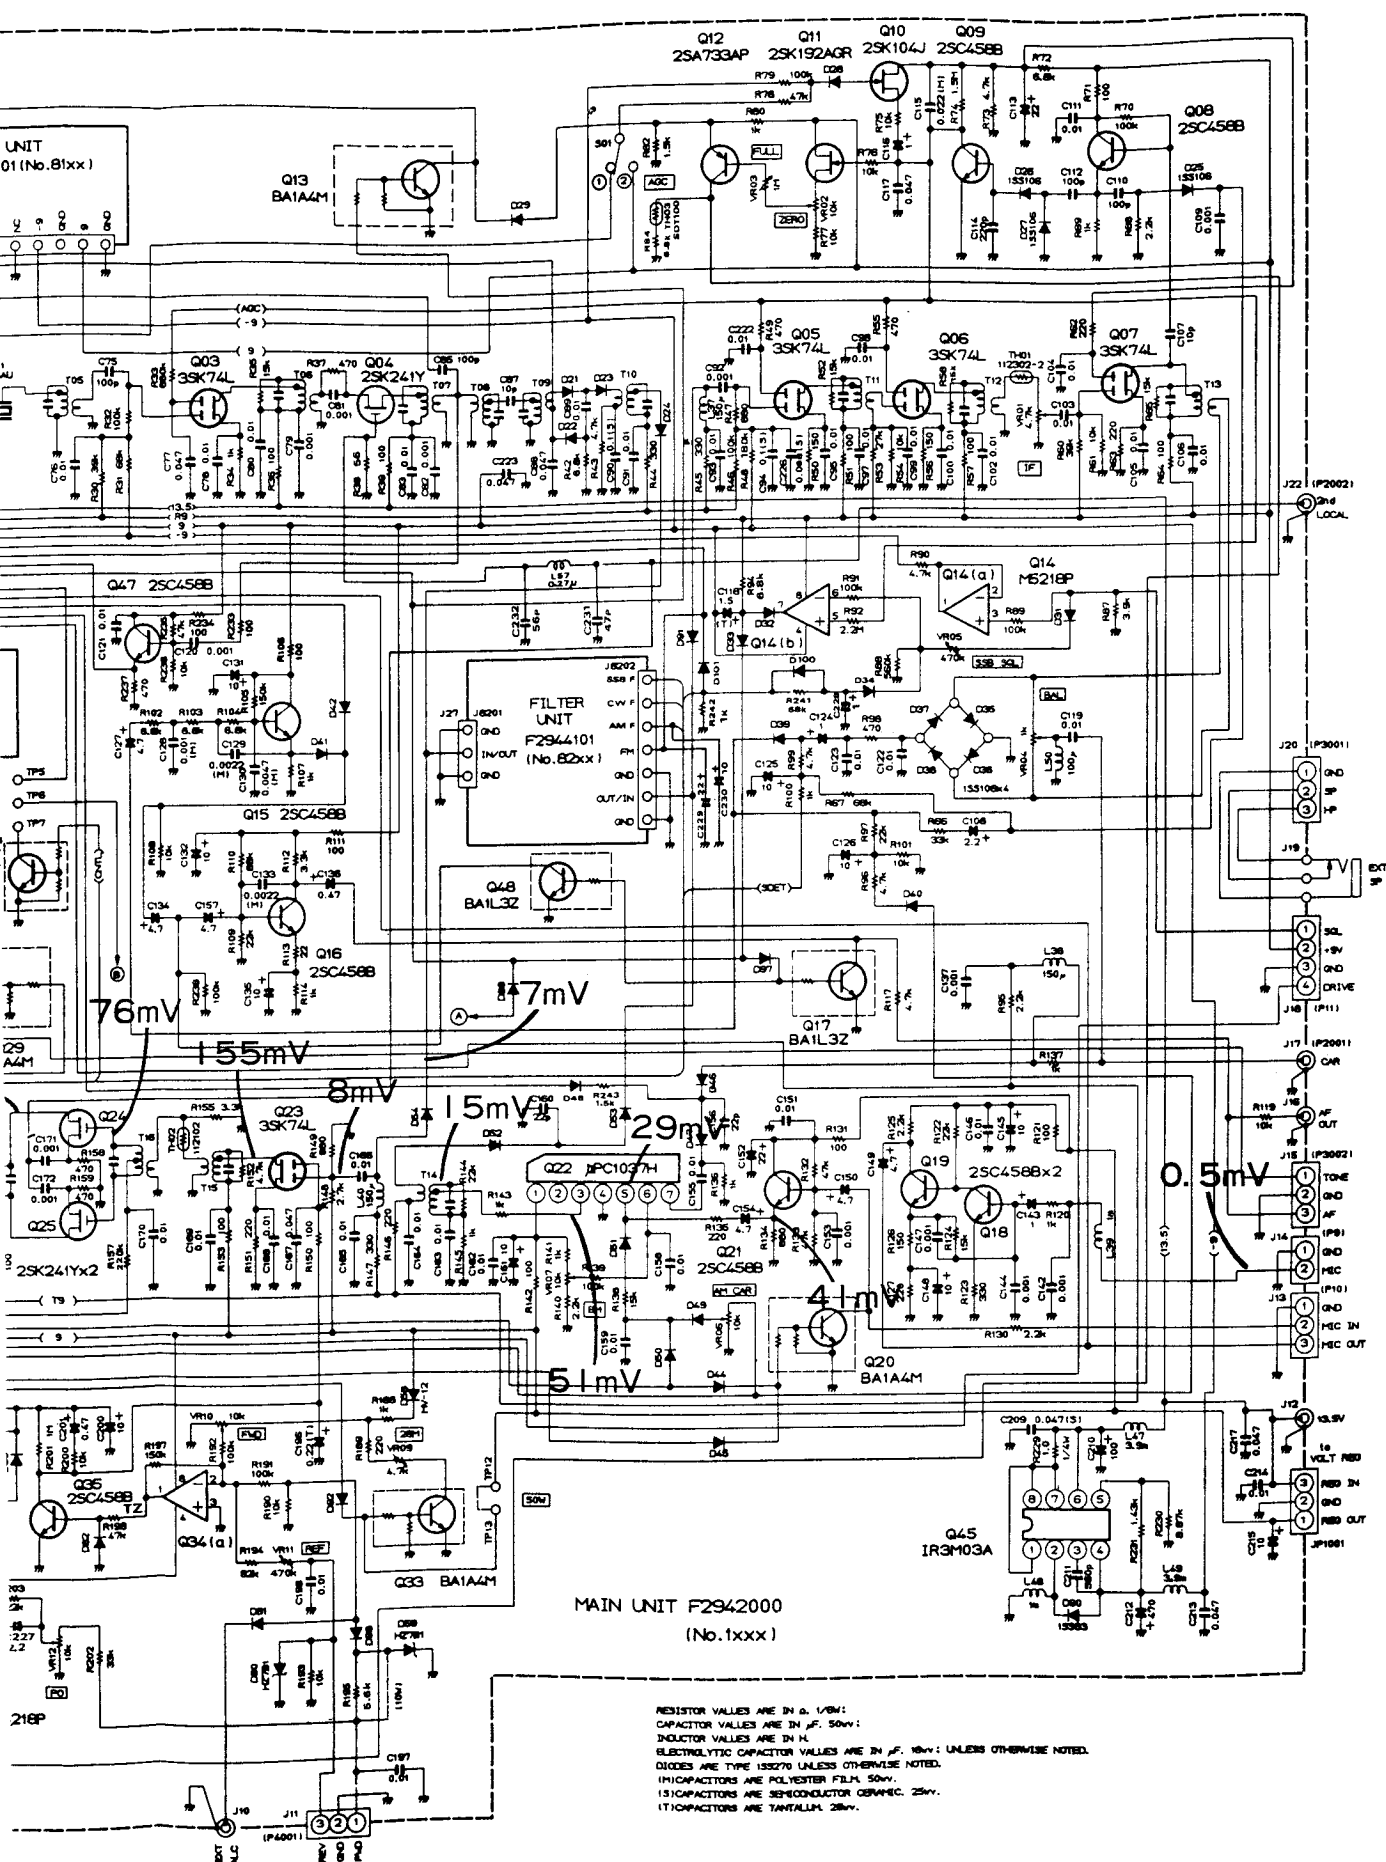


LEVEL DIAGRAM

RECEIVE

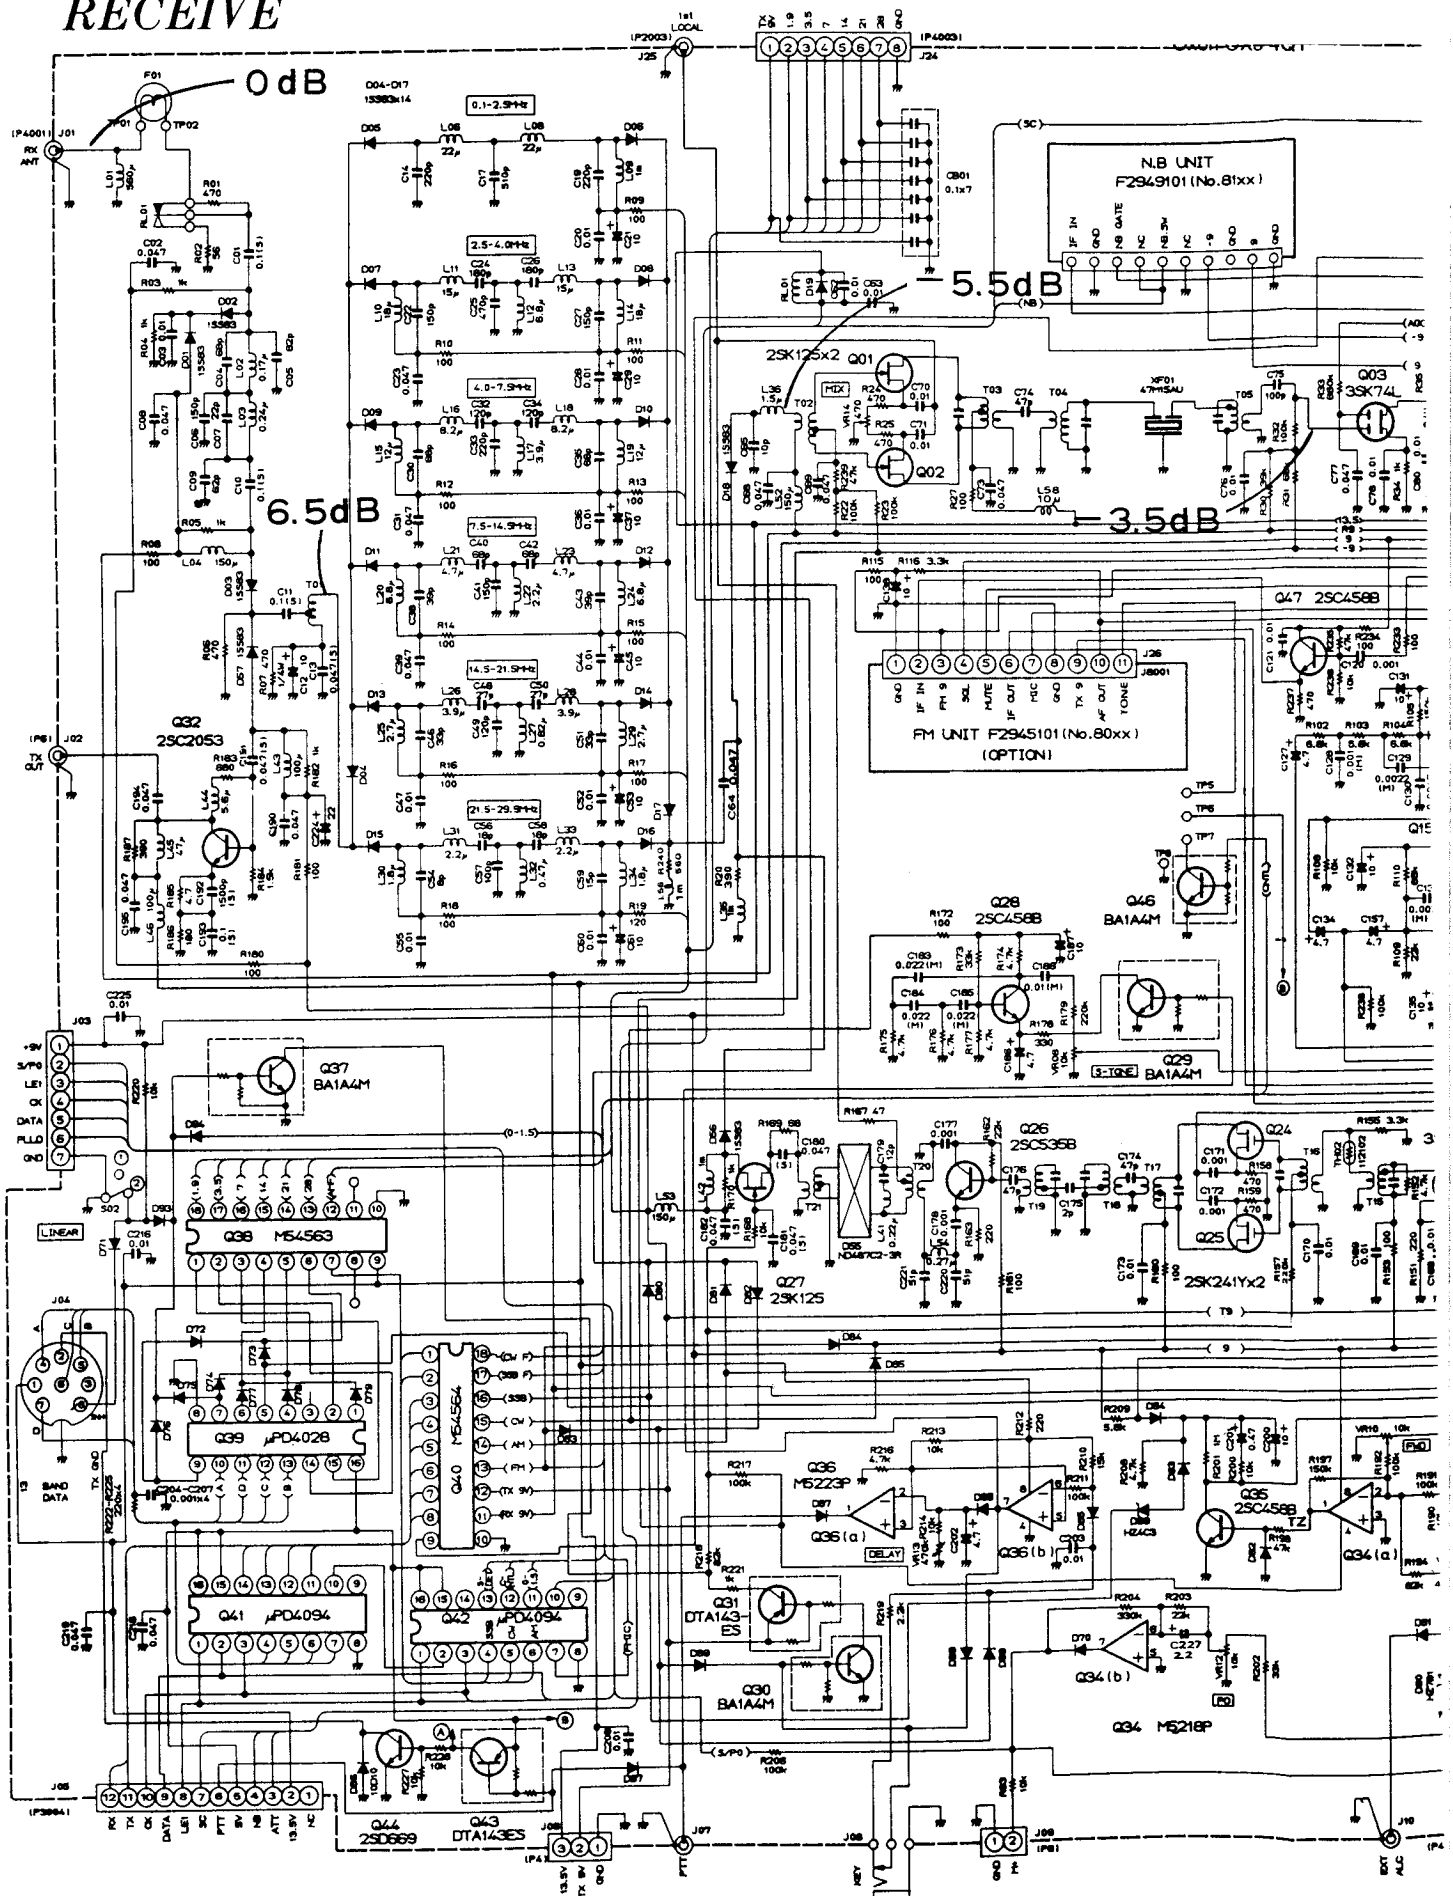


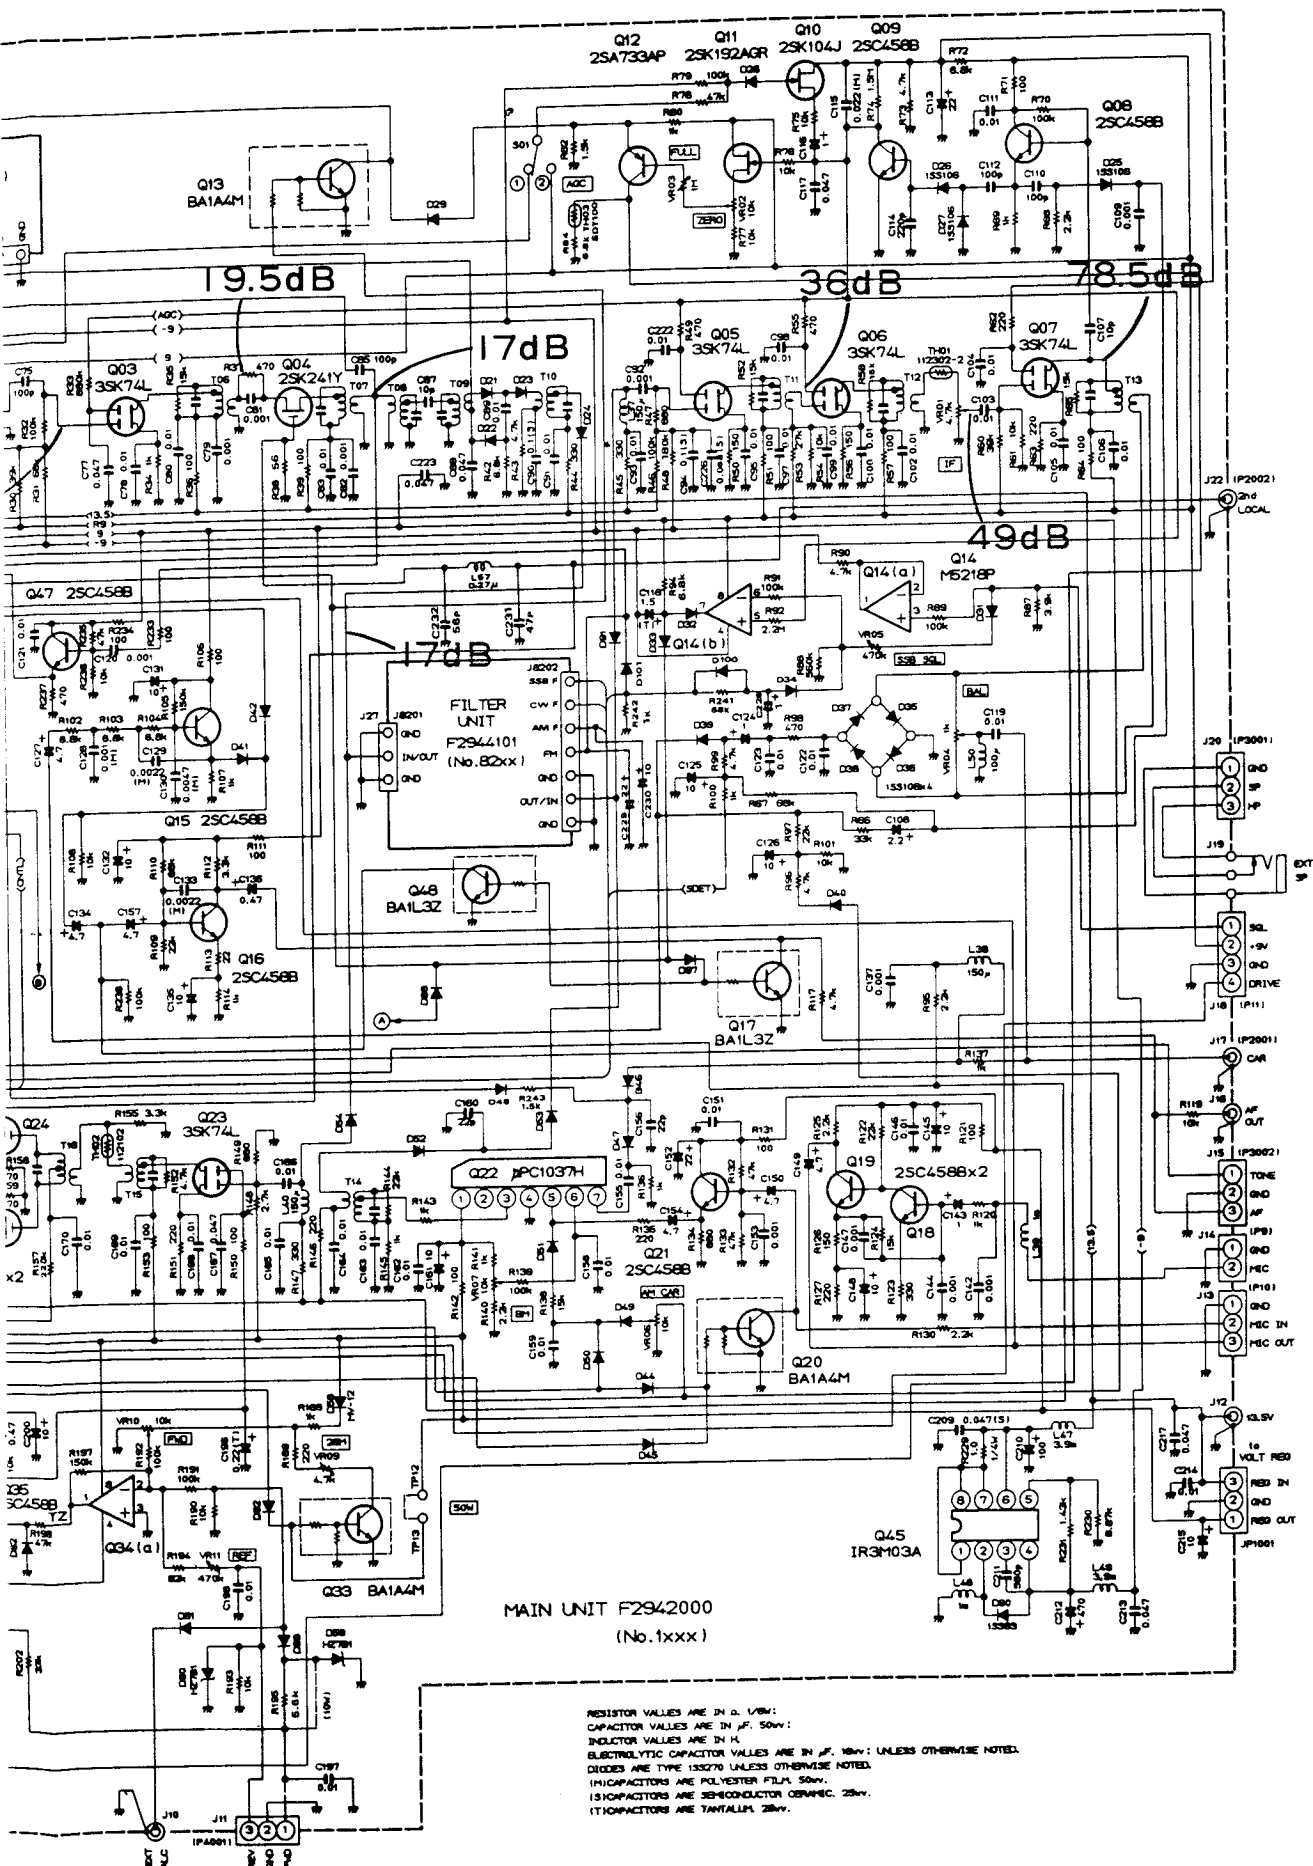


FM UNIT (OPTION)

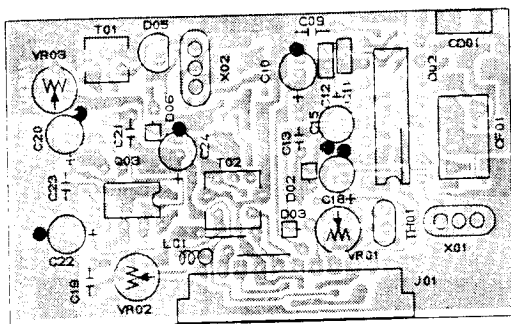


Component side (obverse)

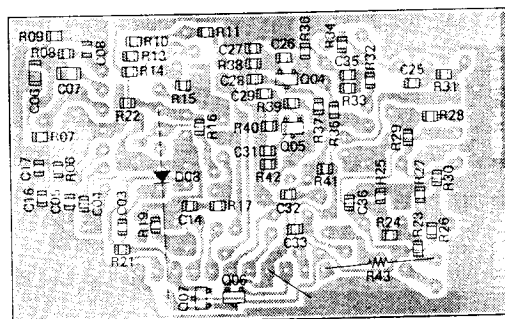


Solder side (reverse)

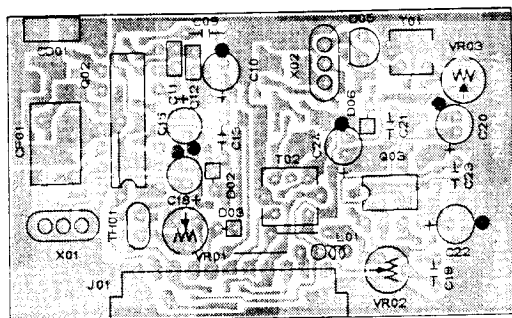


Component side (reverse)

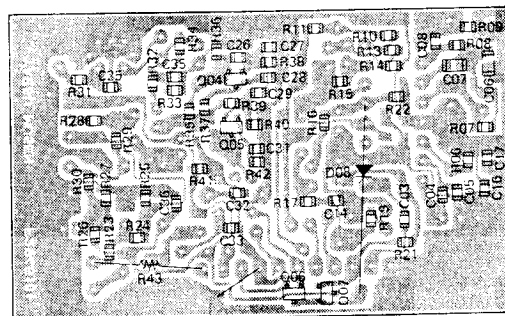


Solder side (obverse)

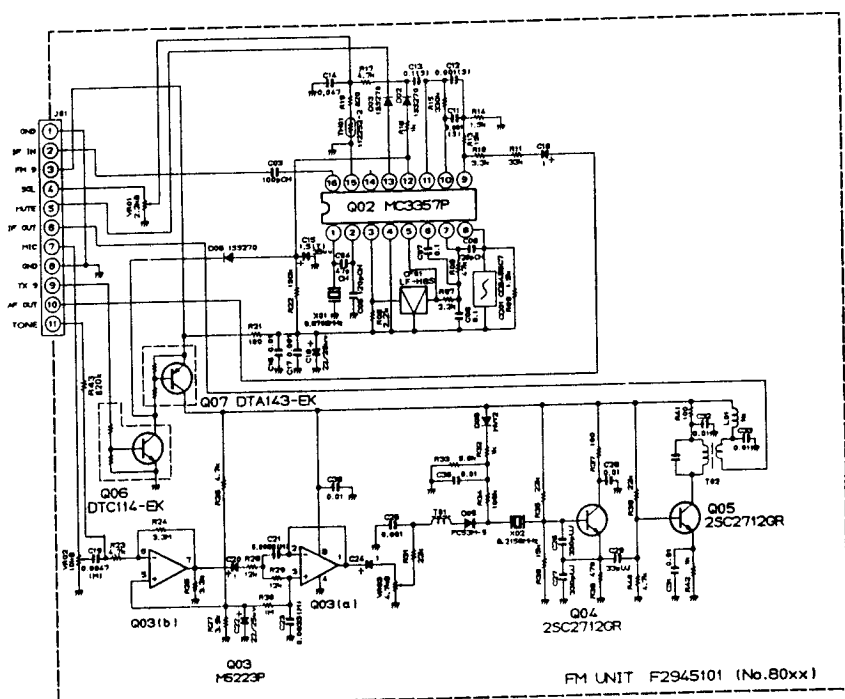


RESISTOR VALUES ARE IN OHMS UNLESS NOTED.
CAPACITOR VALUES ARE IN μF UNLESS NOTED.
ELECTROLYTIC CAPACITOR VALUES ARE IN μF UNLESS NOTED.
UNLESS OTHERWISE NOTED.



M03357P (Q8002)



M5223P (Q8003)



Marked Surface

2SC2712GR (LG) (Q8004,8005)

DTA143-EK (33) (Q8007)

DTC114-EK (Q8006)

INSTALLATION OF OPTIONS

Optional TCXO Installation

Optimum stability can be obtained with the FT-80C by installing the TCXO (Temperature Compensated Crystal Oscillator) in place of PLL reference crystal X1004 on the Local Unit.

- (1) Referring to Figure 1, slide the Local Unit upwards to remove it from the Main Unit and provide free access to both sides of the board.
- (2) Unsolder and remove trimmer TC1004, crystal X1004 and capacitors C1104 and C1105 (Figure 2). Use a vacuum solder remover or solder wick to clean away solder from around the holes under the TXCO mounting location.
- (3) Install the TXCO Unit as shown in Figure 3, and solder the TCXO case at points A (2 places), and solder the TCXO leads at B (3 places). Then trim the leads, and reinstall the Local Unit.

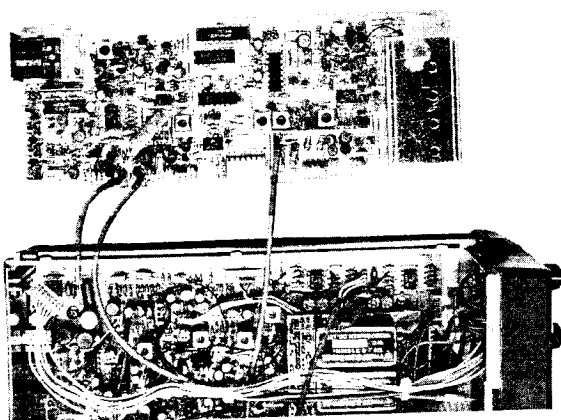


Figure 1

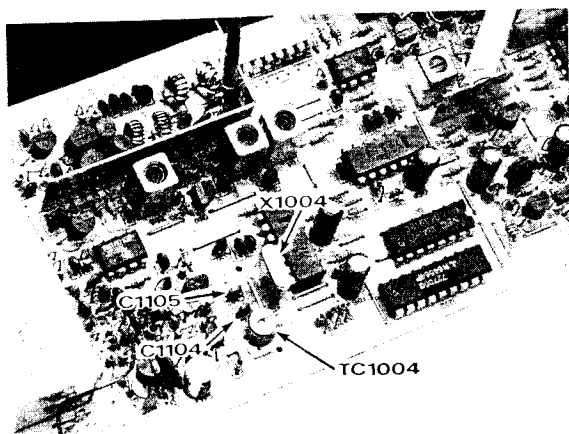


Figure 2

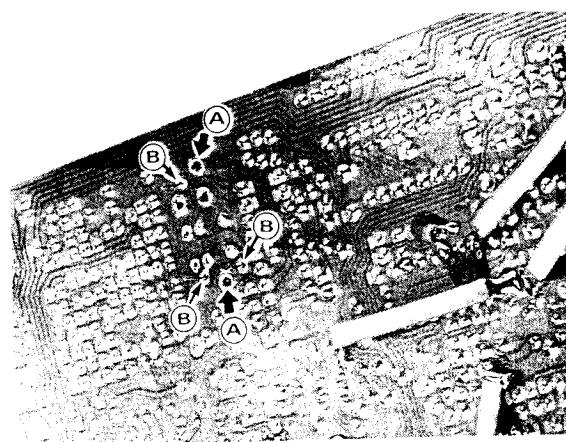


Figure 3


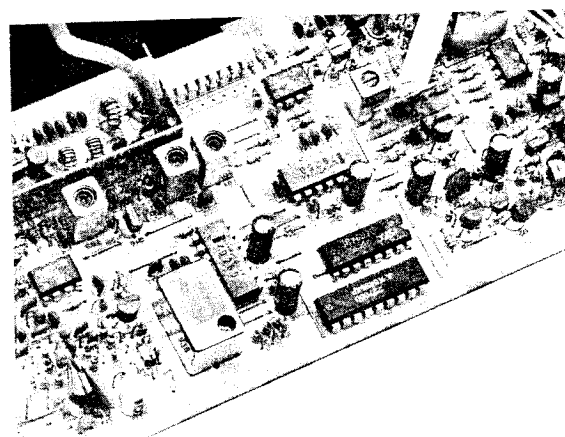



Figure 4

Optional FM Unit Installation

The optional FM Unit can be installed in the 11-pin jack shown in the photo below, with the component side of the board facing to the left.

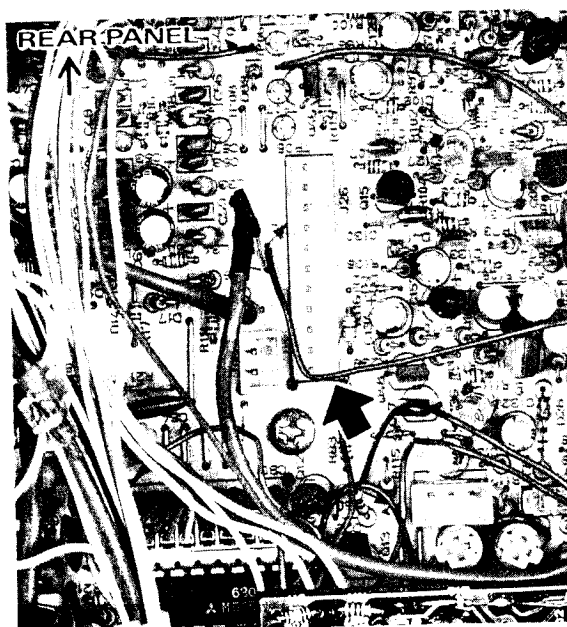



SIGNAL PATH

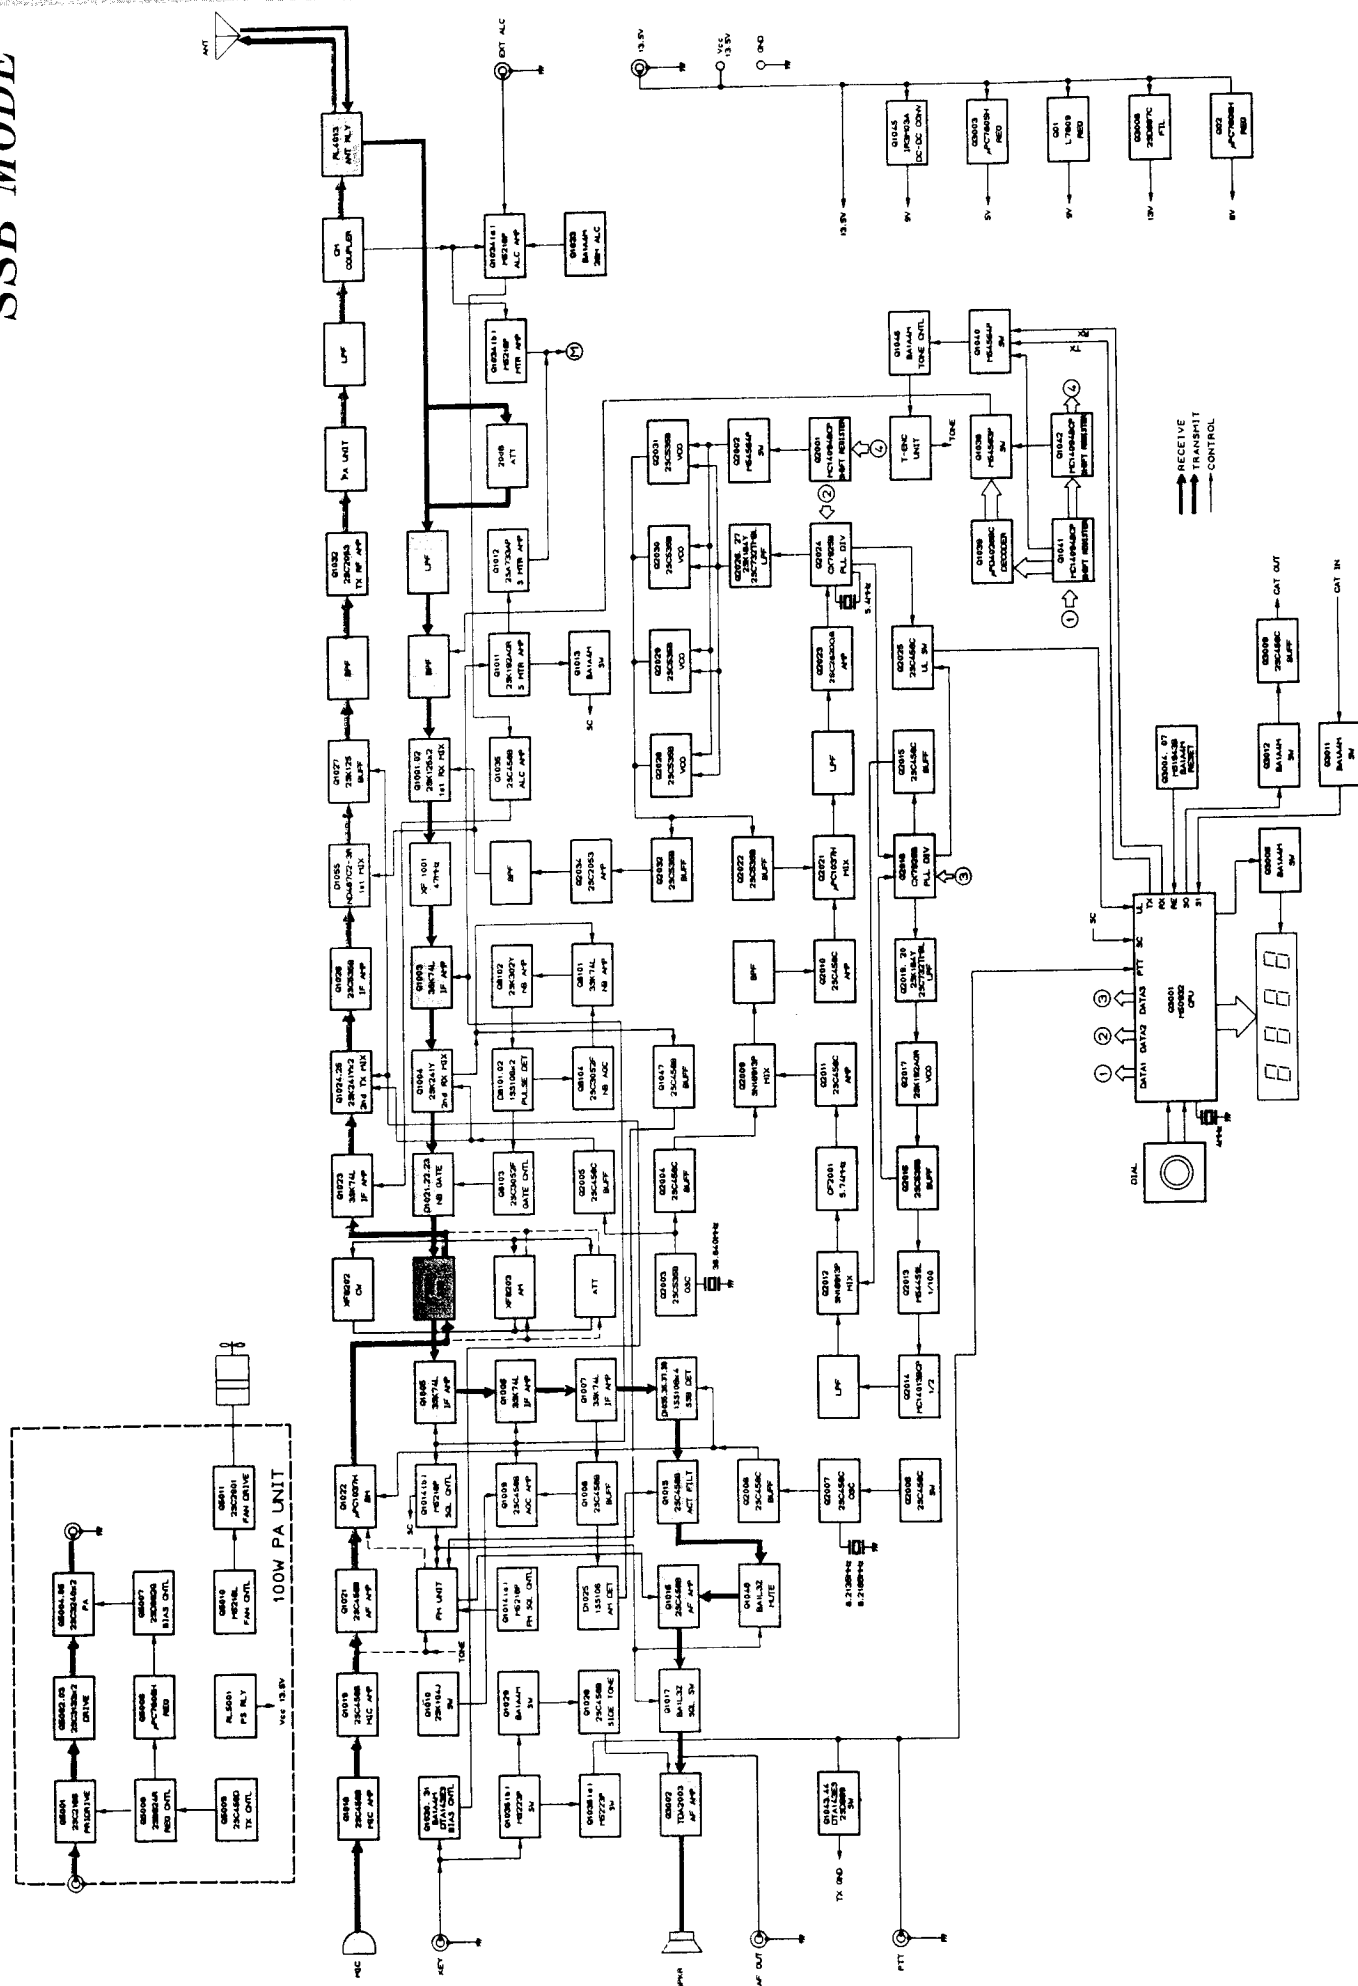


SIGNAL PATH

CW MODE

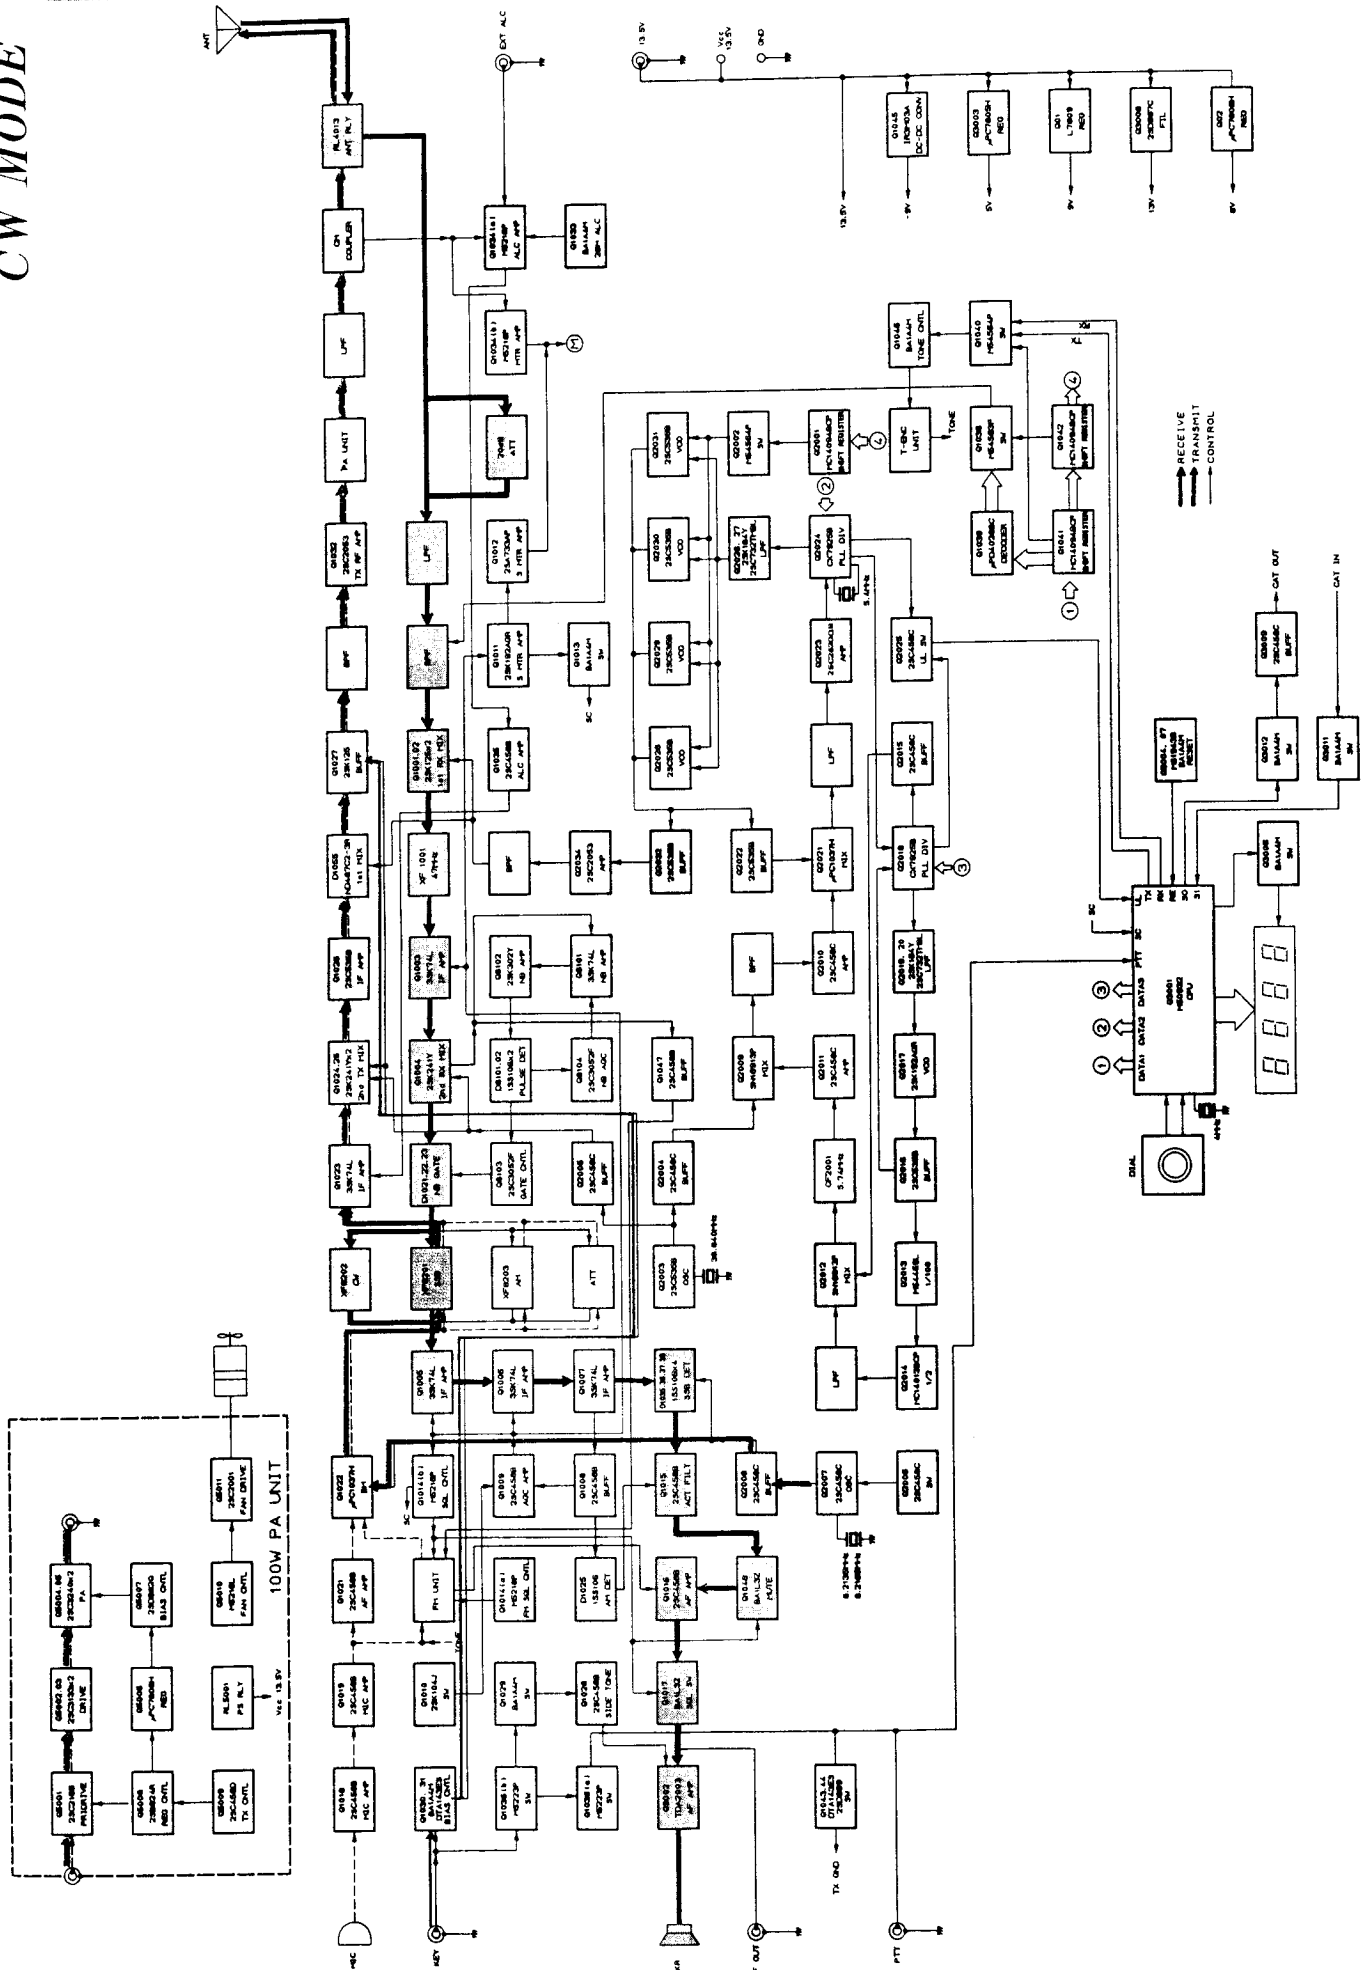



FM MODE

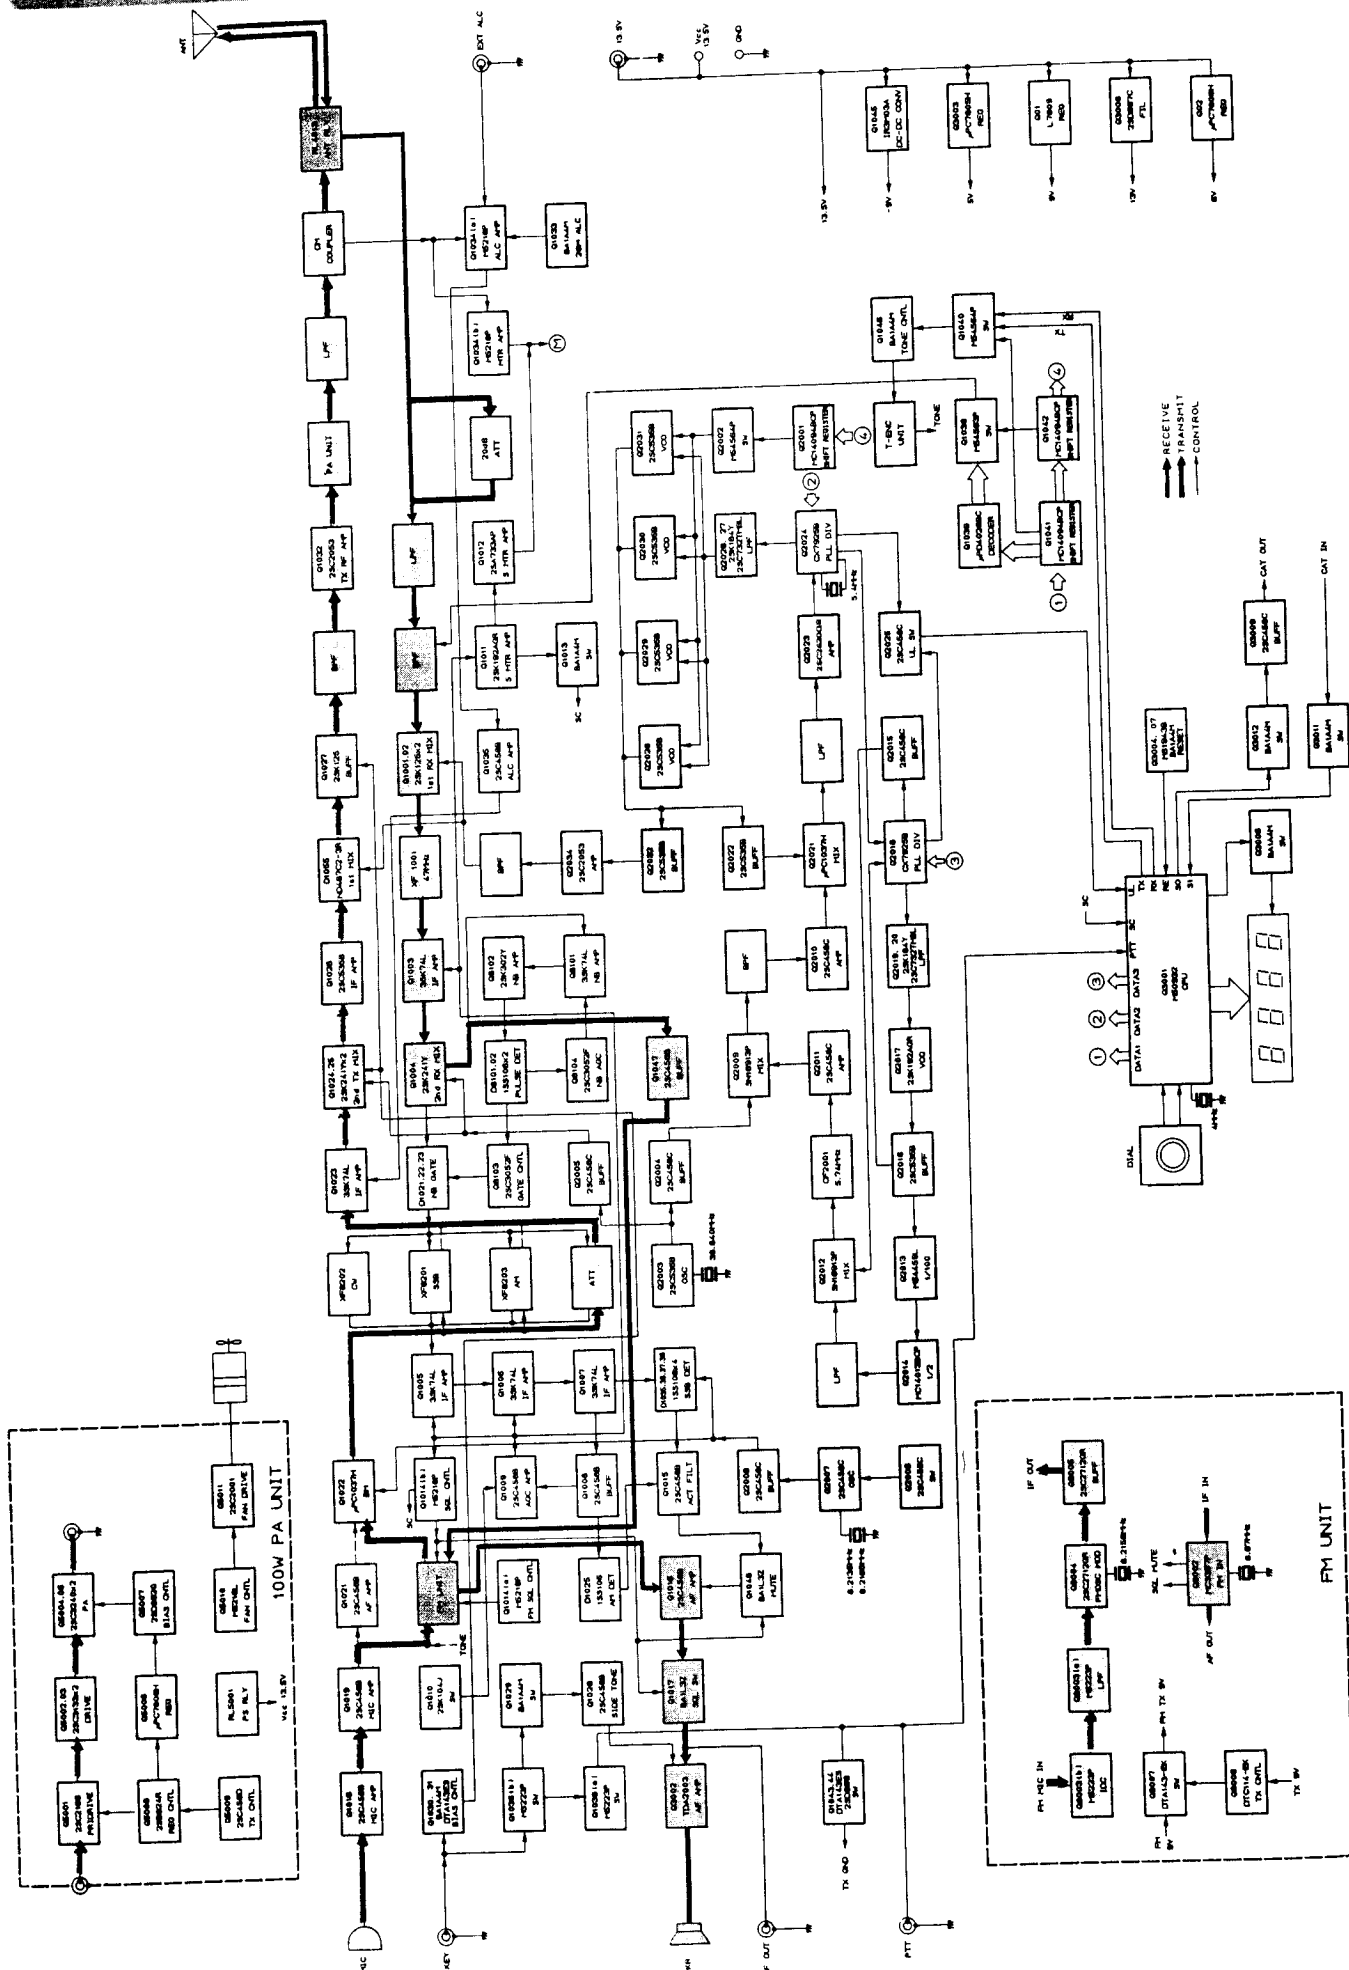

Refer to the block diagrams along with this description for an overall function description of the transceiver. For finer details, refer to the schematic diagrams.

RECEIVER

The RF input signal from the antenna jack is fed through t/r relay RL4013 on the LPF Unit before delivery to J1001 on the RF Unit.

The signal passes through lamp fuse F1001 and then a low-pass filter, followed by one of six bandpass filters, and is then fed to single balanced active mixer Q1001/Q1002 (2 x **2SK125**), where the RF signal is mixed with the 1st local signal delivered from Q2034 (**2SC2053**) on the Local Unit, resulting in a 47.055 MHz 1st IF signal. This signal passes through 15 kHz BW monolithic crystal filter XF1001 (**47M15AU**) to strip away unwanted mixer products, and is then amplified by Q1003 (**3SK74L**).

The amplified 1st IF signal is applied to 2nd mixer Q1004 (**2SK241Y**), where it is mixed with the 38.8 MHz 2nd local signal delivered from buffer Q2005 (**2SC458C**) on the Local Unit, resulting in an 8.215 MHz 2nd IF signal. This signal passes through noise blanker gate D1021-1023 (3 x **1SS270**) to one of three crystal filters for LSB/USB, CW or AM mode on the Filter Unit, for final IF passband definition. The filtered 2nd IF signal is amplified in three stages by Q1005-1007 (**3SK74L**) to a level sufficient to drive the detectors.

In CW and SSB modes, the 2nd IF signal from Q1007 is applied to product detector diode ring D1035-1038 (4 x **1SS270**), which also receives an 8.2 MHz carrier signal from crystal oscillator Q2006 via buffers Q2007 and Q2008 (3 x **2SC458C**) on the Local Unit. The frequency of the carrier oscillator is offset ± 1.5 kHz from the 2nd IF frequency according to the sideband of the selected mode.

In AM mode, the 2nd IF signal from Q1007 is further amplified by buffer amplifier Q1008 (**2SC458B**) before application to AM detector diode D1025 (**1SS106**).

The audio signal from the selected detector is passed through active lowpass filter Q1015 (**2SC458B**), which eliminates high-pitched noise on the audio signal, and amplified by AF preamplifier Q1016 (**2SC458B**). The audio signal is then delivered to the Display Unit, passed through front panel AF potentiometer VR1b and back to audio amplifier Q3002 (**TDA2003H**) on the Display Unit before final delivery via the PHONES jack to the loudspeaker or headphones.

In SSB, CW and AM modes, automatic gain control (AGC) voltage is derived from a portion of the output of buffer Q1008, rectified by D1026/-D1027 (2 x **1SS106**) to provide a fluctuating DC voltage. This is amplified by Q1009 (**2SC458B**) and fed to the 2nd gates of IF amplifiers Q1003; Q1005 and Q1006 to reduce their gain when strong signals are present in the receiver passband, and is also delivered to S-meter buffer Q1011 (**2SK-192AGR**) and amplifier Q1012 (**2SA733AP**) to drive the front panel S-meter.

To provide squelch control in SSB, CW and AM modes, a sample of the AGC signal is applied to comparator op amp Q1014(b) ($\frac{1}{2}$ **M5218P**), along with a DC bias set by SQL potentiometer VR1a on the front panel. When the AGC level is below the threshold set by the squelch control, Q1014(b) turns on squelch switch Q1048 and mute switch Q1017 (both **BA1L3Z**), which remove input and output, respectively, from AF preamplifier Q1016.

When the noise blanker is enabled and pulse-type noise is received, a sample of the 2nd IF signal from Q1004 is delivered to NB Unit, where it is buffered and amplified by Q8101 (**3SK74L**) and Q8102 (**2SK302Y**) before application to pulse detector D8101/D8102 (2 x **1SS106**). The resulting DC pulse switches noise blanker gate controller Q8103 (**2SC3052F**), which interrupts the 2nd IF signal at noise blanker gate D1021-1023 on the Main Unit during the length of the noise pulse. The DC voltage from the pulse detector is also amplified by Q8104 (**2SC3052F**) and fed back to gate 2 of Q8101 as noise blanker AGC.

When the optional FM Unit is installed, The 2nd IF signal from Q1004 is delivered through buffer amplifier Q1047 (**2SC458B**) to FM receiver sub-

CIRCUIT DESCRIPTION

system IC Q8002 (**MC3357P**) on the FM Unit, which consists of local oscillator, mixer, IF limiter amplifier and FM detector stages. The amplified 2nd IF signal is applied to the mixer section, along with the 3rd local signal produce by 8.6708 MHz crystal X8001. The 455 kHz product is then passed through ceramic filter CF8001 (**LF-H8S**), and returned to Q8002 for 3rd IF amplification and limiting to remove amplitude variations before detection by ceramic discriminator CD8001 (**CDB455C7**). Audio output from the FM IC is then de-emphasized by C8010 and R8011, and returned to AF preamplifier Q1016 on the Main Unit for audio amplification as already described for the other modes.

For FM squelch control, a bias voltage adjustable by the front panel SQL potentiometer is produced by op amp Q1014a ($\frac{1}{2}$ -**M5218P**) on the Main Unit, and delivered to FM IC Q8002 on the FM Unit. The FM IC uses this bias in combination with a sample of audio output of the detector stage to produce a DC squelch switching voltage whenever high frequency noise appears at the detector (as occurs when no carrier is present in the 3rd IF). This "mute" signal is returned to the Main Unit to disable the AF preamplifier via Q1048 and Q1017 as previously described for the other modes, and also to disable the S-meter via switch Q1013 (**BA1A4M**).

TRANSMITTER

For voice modes, audio from the microphone is delivered to the Main Unit at J1013 pin 2, and amplified by Q1018/Q1019 (2 x **2SC458B**). For SSB and AM modes, the amplified speech audio is then passed through MIC gain potentiometer VR2b on the front panel, and further amplified by Q1021 (**2SC458B**) before application to balanced modulator Q1022 (**uPC1037H**). The modulator also receives a carrier signal from the carrier oscillator on the Local Unit. The resulting 8.2 MHz double sideband product from the modulator is delivered to the Filter Unit, where, for SSB modes, the unwanted sideband is stripped by crystal filter XF8201 (XF8.2M-242-02). In AM mode, the double sideband signal is merely attenuated by the same amount as the filter's insertion loss. The resulting 8.2 MHz single sideband signal (for LSB or USB) or double sideband signal (for AM) is buffered by

Q1023 (**3SK74L**) and then applied to single balanced mixer Q1024/Q1025 (2 x **2SK241Y**), which also receives the 38.8 MHz local signal from the Local Unit. The resulting 47 MHz IF signal is filtered and then amplified by Q1026 (**2SC535B**) before application to double balanced mixer ring D1055 (**ND487C2-3R**), where it is mixed with the PLL local signal from Q2034 on the Local Unit. The resulting RF signal at the transmit frequency is amplified by Q1027 (**2SK125**) and filtered by one of six bandpass filters to suppress out-of-band mixer products. The RF signal is then amplified up to 200 mV by Q1032 (**2SC2053**), and delivered to the 100W PA Unit.

On the 100W PA Unit, the low-level RF signal from the Main Unit is amplified by pre-driver Q5001 (**2SC2166**), push-pull driver Q5002/Q5003 (2 x **2SC3133**), and then push-pull final amplifier Q5004/Q5005 (2 x **2SC3240**), which provides approximately 100 watts of RF output for delivery to the LPF Unit.

On the LPF Unit, RF output from the final amplifier is passed through one of six lowpass filters, a sampling directional coupler, and t/r RL4013 before delivery to the antenna jack. The sampling directional coupler senses forward and reverse power output, which is rectified by D4003 (**1SS106**) and D4002 (**1SS270**), respectively, for return to the ALC and SWR sensing circuitry on the Main Unit. The DC voltages derived from forward and reverse power are applied in combination to op amp Q1034(a) ($\frac{1}{2}$ -**M5218P**), the output of which is buffered by Q1035 (**2SC458B**) and fed back to the 2nd gate of the transmitter chain's 8.2 MHz IF amplifier Q1023, so that transmitter IF gain is regulated by relative power output, thus preventing overdrive or transmission into an excessive impedance mismatch at the antenna. Detected forward power is also applied to ALC meter driver op amp Q1034(b) ($\frac{1}{2}$ -**M5218P**) for ALC indication on the panel meter during transmission.

For CW (A1) mode transmission, the PTT line is controlled by the telegraph key, after pulse shaping and delay by dual op amp Q1036 (**M5223P**). Mode selector Q1040 (**M54564**) disables speech input to modulator Q1022 by Q1020 (**BA1A4M**), and enables sidetone audio oscillator Q1028 (**2SC458B**), which is in turn keyed by

Q1036 via Q1029 (**BA1A4M**). The resulting keyed audio from the sidetone oscillator is delivered to the audio amplifier on the Display Unit, and then via the PHONE jack to the loudspeaker or headphones. Meanwhile, on the Local Unit, serial mode selection data from the Main Unit activates Q2006 (**2SC458B**) to shift the frequency of USB carrier oscillator crystal X2002, so that the carrier signal delivered to balanced modulator Q1022 on the Main Unit passes unhindered through crystal filter XF8201 on the Filter Unit. The carrier is then mixed to the final transmitting frequency and amplified as described previously for the other modes.

When the optional FM Unit is installed, amplified speech audio from microphone amplifier Q1018/-Q1019 is delivered to IDC (instantaneous deviation control) amplifier Q8003(b) ($\frac{1}{2}$ **M5223P**) on the FM Unit, which prevents overdeviation from excessive microphone levels, and is then pre-emphasized and lowpass filtered by Q8003(a), C8021, R8028 and R8029 to suppress out-of-band modulation. The processed audio applied to varactor diode D8005 (**FC53M-5**) to modulate FM carrier VCO Q8004 (**2SC2712GR**), which has a center frequency of 8.2158MHz. The modulated carrier is buffered by Q8005 (**2SC2712GR**) and returned to modulator IC Q1022 on the Main Unit, which has its other input port disabled during FM transmission, so that the 8.2 MHz carrier is passed through for amplification in the same manner as for other modes.

PLL

The PLL local signal for the receiver 1st local and the transmitter final local is generated by one of four VCOs: Q2028-Q2031 (all **2SC535B**) in conjunction with varactors D2008, D2011, D2013 and D2015 (all **1SV55**). The oscillating frequency is determined primarily by the level of DC voltage applied to the varactors. VCO output is buffered by Q2032 (**2SC535B**, amplified by Q2034 (**2SC2053**) and band-pass filtered by C2148-C2153 and L2014-L2017 before delivery to TX mixer D1055 and RX 1st mixer Q1001/Q1002 on the Main Unit. A sample of the output of the selected VCO is also buffered by Q2022 (**2SC535B**) and delivered to MIX BPF Unit for application to PLL mixer Q7021 (**uPC1037H**), where the sample VCO signal is mixed with a 44.5 MHz PLL local signal

delivered from PLL local VCO Q2010 (**2SC458C**), resulting in a 2.6-32.45 MHz PLL IF signal. This signal is band-pass filtered by T7010-T7014, C7088-C7097 and C7158, amplified by Q7023 (**2SC2620QB**) and returned to the Local Unit for application to the programmable divider section of PLL subsystem IC Q2024 (**CX7925B**), which also includes a reference oscillator/divider and phase detector. The programmable divider section of Q2024 divides the PLL IF signal down to 50 kHz, according to serial frequency data from microcontroller Q3001 (**M50932**) on the Display Unit.

The reference oscillator/divider section of Q2024 generates another 50 kHz reference signal by dividing the signal from 5.4 MHz crystal X2004 by 108. This 50 kHz reference and the 50 kHz signal derived from the PLL IF are applied together to the phase detector section of Q2024, which produces a DC pulse train with average power proportional to any phase difference between the two 50 kHz signals. The pulse train is then smoothed by loop filter Q2026/Q2027 (**2SK184Y/-2SC732TMBL**), producing a DC voltage at a level corresponding to the difference in phase between the divided reference and the VCO signal. This voltage is returned to the varactor diodes in the selected VCO tank circuit, phase locking the VCO to the reference crystal.

The PLL local signal is derived from PLL subloop VCO Q2017/D2005 (**2SK192AGR/FC-53M5**). the 63-72.995 MHz output of which is buffered by Q2016 (**2SC535B**) and then divided by 100 at Q2013 (**M54459L**) and again by 2 at Q2014 (**uPD4013BCP**). The 1/200 divided local signal is low-pass filtered by L2002, L2003 and C2047-C2051 and applied to 1st subloop mixer Q2012 (**SN16913P**), which also receives a 5.4 MHz signal from reference crystal X2004, through subloop PLL subsystem IC Q1018 (**CX7925B**), buffered by Q2015 (**2SC458C**). The 5.715-5.764975 MHz product of these signals is passed through ceramic filter CF2001 (**SFT5.74MA**), buffered by Q2011 (**2SC458C**), and applied to 2nd subloop mixer Q2009 (**SN16913P**) along with a 38.84 MHz signal from crystal oscillator Q2003 (**2SC535B**), buffered by Q2004 (**2SC458C**). The resulting 44.555-44.604975 MHz product is then band-pass filtered by T2001, T2002 and C2032, and buffered by Q2010 before delivery to PLL mixer Q7021 on the Mix BPF Unit.

CIRCUIT DESCRIPTION

A sample of the buffered 63-72.995 MHz output of the subloop VCO is fed to the programmable divider stage of subloop PLL subsystem IC Q2018 where it is divided down to 5 kHz according to serial data from microcontroller Q3001 on the Display Unit. Another 5 kHz signal is derived from 5.4 MHz crystal X2001, divided by 108 in the reference divider section of Q2018. The two 5 kHz signals are applied to the phase detector section of Q2018, and the resulting pulse train is smoothed by subloop filter Q2019/Q2020 (2SK184Y/2SC732TMBL), producing a DC voltage at a level corresponding to the difference in phase between the divided reference and the subloop VCO signals. This voltage is applied to D2005 in the tank circuit of the subloop VCO, phase locking the subloop VCO to crystal X2004.

PLL subsystem ICs Q2018 and Q2024 each provide an indication of whether the PLL is unlocked, at pin 8. These signals are ORed together to unlock switch Q2025, which signals mcu Q3001 on the Display Unit via the "UL" line to disable transmission as long as either loop is not phase-locked.

CONTROL CIRCUITRY

Major frequency control functions such as memory/vfo tuning, storage and display, and PLL divider control are performed by microcontroller Q3001 (M50932) on the Display Unit, at the command of the user via the tuning knob and pushbutton switches on the front panel. Serial data from the mcu is delivered to Main and Local Units via the CK, DATA and LE lines.

On the Main Unit, serial data for the PLL dividers (on the Local Unit), bandpass filters and mode selection are decoded by shift registers Q1041 and Q1042 (uPD4094) and BCD-to-Decimal decoder Q1039 (uPD4028BC). The resulting binary outputs for bandpass filter selection are buffered and level-shifted by switch Q1038 (M54563), while those for transmit/receive and mode selection are buffered and level-shifted by Q1040 (M54564).

Mode and band selection serial data from the Main Unit is decoded by shift register Q2001 (uPD4094BCP) and level-shifted by Q2002 (M54564) to select the active main PLL VCO, and the carrier oscillator required for the selected

mode. Programmable divider data from the Display Unit is applied directly to PLL subsystem ICs Q2018 and Q2024.

4800-baud, TTL-level serial data I/O for external control of the transceiver via the CAT system is provided by mcu pin 24 (input) and 25 (output), accessible from the rear panel jack.

POWER SUPPLY & REGULATION

13.5V DC is supplied to J03 in the rear panel, and fed through power switch relay RL5001 on the 100W PA Unit to the 13.5V DC bus.

The +9V bus is derived from the 13.5V bus via regulator Q2 (uPC7808H) on the main chassis. The -9V bus for the opamps is derived from the 13.5V bus by DC-DC converter IC Q1045 (IR3M03A) on the Main Unit. The +9V bus is switched by Q1040 on the Main Unit, under control of the mcu via pins 41 and 42, to provide TX9V and RX9V buses for transmit/receive switches.

Up to twenty channels in the FT-80C can be programmed with user-specified simplex or split frequencies and mode.

With the transceiver switched off, gently pry the plastic cover from the front panel (Figure 1). This will expose a set of holes giving access to switches underneath, which must be pushed using a sharp tool (such as a toothpick).

(Simplex Channels)

- 1) Switch the transceiver on, press the switch in hole **A** (Figure 2), if necessary, several times until "VFO A" is displayed.
- 2) Press the **◀MODE▶** button to select the desired mode for the new channel, and turn the Channel Selector Knob until the desired channel frequency is displayed (press the switch in hole **B** and immediately turn the Channel Selector Knob for 500 kHz tuning steps).
- 3) Press the switch in hole **C** (so that "MR" is displayed) and turn the Channel Selector Knob to select the memory channel number to be programmed.
- 4) Press the switch in hole **A** to return to the programming mode, and then press the switch in hole **E** to store the new frequency and mode data selected in step 2 into the memory channel selected in step 3.

When finished programming, press the switch in hole **C** to return to memory mode, and replace the plastic cover.

(Semi-Duplex Channels)

- 1) For semi-duplex (split frequency) channels (Channel numbers 1 through 17 only), after performing steps (1) and (2) of the Simplex procedure for the transmitter, press the switch in hole **A** so that "VFO B" is displayed, and repeat the same step (2) for the receiver.
- 2) Press the switch in hole **D** to select split frequency operation (SPLIT is displayed), and then press the switch in hole **E** to store both transmit and receive frequencies into the memory channel.

When finished programming, press the switch in hole **C** to return to memory mode, and replace the plastic cover.

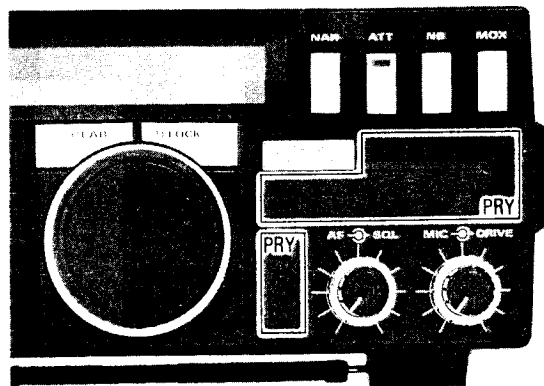


Figure 1

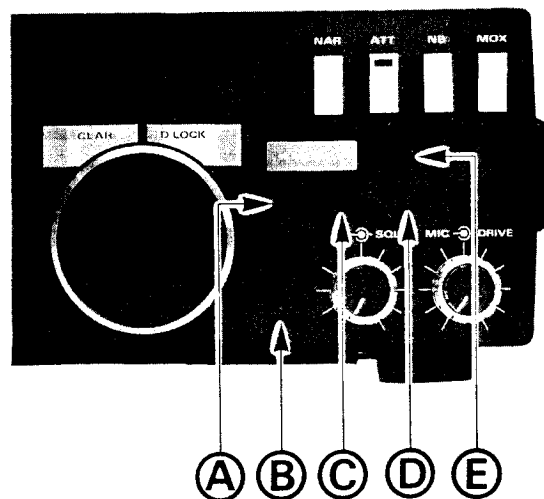


Figure 2

NOTE

ALIGNMENT NOTES

Service and alignment should be performed only by qualified service personnel, using the proper test equipment as listed below. Warranty claims may be invalidated by unauthorized service attempts.

During alignment, the NAR, ATT and NB buttons should be set to OFF, and the SQL control must be fully counterclockwise, except where specifically stated otherwise. A 50-ohm dummy load must be connected to the antenna jack in all steps calling for transmission (pressing the MOX button). Correct alignment is not possible using an antenna.

To select the frequencies required for alignment, follow steps 1 and 2 of the Channel Programming procedure (for Simplex Channels) on page 27, which will allow you to tune the transceiver with the channel selection knob.

In the following procedures, after completing one step, read the following step to determine whether the same test equipment will be required. If not, remove the test equipment (except the dummy load and wattmeter, if connected) before proceeding.

SPECIFICATIONS

GENERAL

Frequency range
1.5-29.999975 MHz, except 7.6-9 MHz and 23.527 $\pm$ 50 kHz

Number of channels
20

Channel steps
SSB & CW: 25 Hz
AM: 1 kHz
FM*: 5 kHz

Frequency stability (0° to +40°C)
SSB, CW, AM: $\pm$ 200 Hz
FM: $\pm$ 300 Hz

Frequency accuracy
SSB, CW, AM: $\pm$ 200 Hz
FM: $\pm$ 300 Hz

Antenna impedance (nominal)
50 ohms, unbalanced

Supply voltage
13.5 V DC $\pm$ 10% (neg. ground)

Maximum current consumption
19A (typical, @100W output)

Dimensions (WHD)
238 x 93 x 238mm (without knobs)

Weight (approx)
3.5 kg (7.72 lb)

TRANSMITTER

Emission types
LSB, USB (J3E); CW (A1A); AM (A3E)
and optionally FM (F3E)

Power output (+20/-10%)
SSB, CW & FM*: 100W PEP/DC,
AM: 25W Carrier

SSB Carrier suppression
better than 40dB below peak output

Unwanted sideband suppression (SSB)
better than 50dB (1 kHz tone)

Spurious radiation
Harmonic: better than -46dB (within 1.8-
2.5, 3-3.5, 5.5-8, 10-15 and 18-30 MHz)
Non-Harmonic: better than -40dB

Audio response
less than -6dB from 400 to 2600Hz

3rd order intermodulation distortion
better than -25dB (@100W PEP)

Modulation systems
SSB/CW: active balanced modulator
AM: early stage (low level)
FM*: variable reactance

Maximum FM* deviation
 $\pm$ 2.5 kHz

Microphone impedance
500 to 600 ohms

RECEIVER

Circuit type
CW, SSB, AM: double conversion
FM*: triple conversion

Clarifier range
 $\pm$ 9.975 kHz

Sensitivity (for 10dB S+N/N, exc FM)
SSB/CW: 0.5uV
AM: 2uV
FM*: 0.7uV for 12dB SINAD (above 28MHz)

Squelch sensitivity
SSB/CW/AM: 2.0uV above 1.5 MHz,
4.0uV within 0.5-1.5 MHz
FM*: 0.32uV

Intermediate frequencies
47.055MHz, 8.215MHz, 455kHz(FM-only*)

Image rejection
better than 70dB within 1.5-30MHz

IF rejection
better than 60dB within 1.5-30MHz

Selectivity (-6/-60dB)
SSB, CW(W), AM(N): 2.2/5 kHz
CW(N): 500 Hz/1.8 kHz
AM(W): 6/14 kHz; FM(6/50dB)*: 8/19kHz

Maximum audio power output
at least 1.5W into 8 ohms w/10% THD

Audio output impedance
4 to 8 ohms

* FM operation requires optional unit.

Specifications may be subject to change without notice or obligation.

ALIGNMENT

Alignment Equipment

Frequency counter with accuracy of 0.1 ppm to 100 MHz

DC voltmeter with at least 10-Megohm input impedance

RF voltmeter with at least 5% accuracy to 100 MHz, high impedance, and ranging from 10 mV to 3 Vrms

AF millivoltmeter

DC milliammeter ranging to 500 mA

RF in-line wattmeter

Resistive dummy load, 50 ohms, 150W; three required for SWR Turndown alignment

RF signal generator covering 1-30 MHz, with calibrated output levels from 5 dB μ to 100 dB μ

AF signal generator with calibrated output levels from 1 mV to 25 mV

RF sampling coupler ("T")


Additional Alignment Precautions

Correct alignment requires that the ambient temperature be the same as that of the transceiver and test equipment, and that this temperature be held constant between 20 and 30 °C (68 to 86 °F). When the transceiver is brought into the shop from hot or cold air it should be allowed some time for thermal equalization before alignment.

Alignments must only be made with oscillator shields and circuit boards firmly affixed in place. Also, the test equipment must be thoroughly warmed up before beginning.

Alignment values assume a DC supply voltage of 13.5V DC.

Note: Signal levels in dB referred to in the alignment procedure are based on 0dBu=0.5uV.

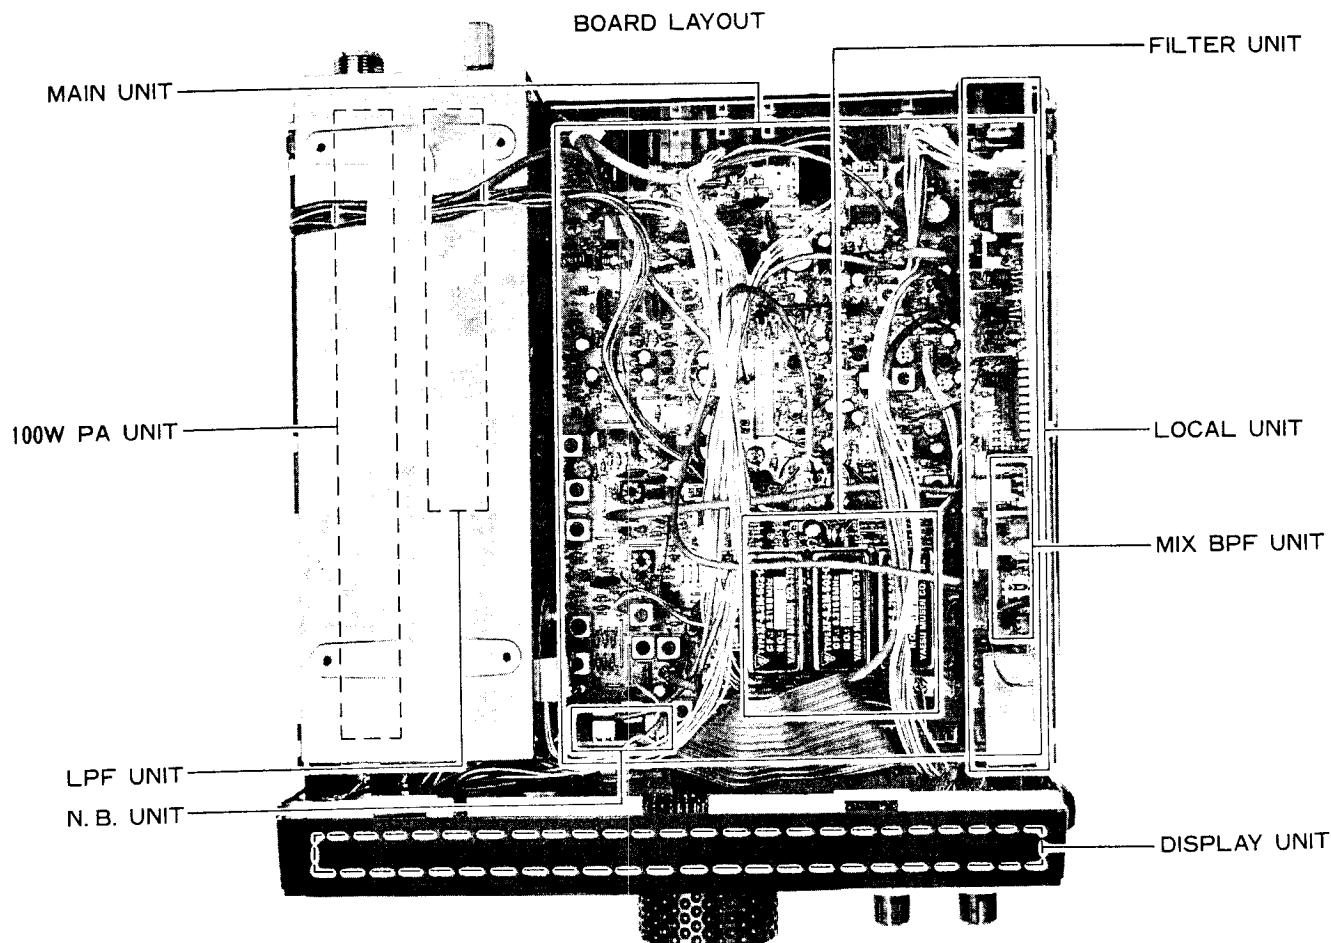

I. Local Unit

A. 2nd Local Overall Check

1. Disconnect TMP plug P2002 from J1022 on the Main Unit.
2. Connect the frequency counter to P2002 and confirm 38.8380 MHz ± 400 Hz on the counter.
3. Remove the counter and connect a 50-ohm resistor and the RF voltmeter to P2002.
4. Confirm at least 230 mVrms on the voltmeter.
5. Disconnect the resistor and voltmeter, and replace P2002 in J1022.

B. PLL Subloop VCO



1. Connect the DC voltmeter between the exposed lead of R2058 (TP2001) and chassis ground.
2. Tune the transceiver to 7.0015 MHz, LSB mode.
3. Adjust T2005 for 2.0 ± 0.1 V on the meter.
4. Retune the transceiver to 7.0014 MHz and confirm at least 5.6 ± 0.6 V on the voltmeter.
5. Disconnect the voltmeter.

C. PLL Subloop BPF

1. Connect the RF voltmeter to the exposed lead of C2030 (TP2002).
2. Tune the transceiver to 7.0265 MHz, LSB mode.
3. Adjust T2004 for peak on the voltmeter (at least 70 mVrms).
4. Move the voltmeter to TP2003, and retune the transceiver to 7.0267 MHz.
5. Adjust T2001-T2003 for peak on the voltmeter (more than 50 mVrms).
6. Disconnect the voltmeter.

D. PLL Main Loop VCO

1. Connect the DC voltmeter between the exposed lead of R2083 (TP2004) and chassis ground.
2. Referring to the following table, tune the transceiver to each adjustment frequency (MHz), adjust the corresponding transformer for 1.5 ± 0.1 V, retune to the corresponding check frequency and confirm the check voltage on the voltmeter.

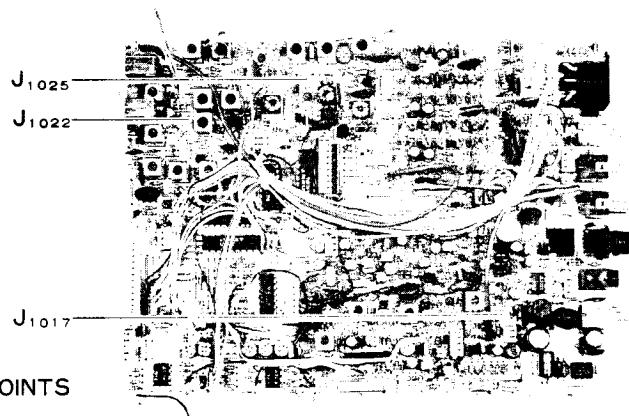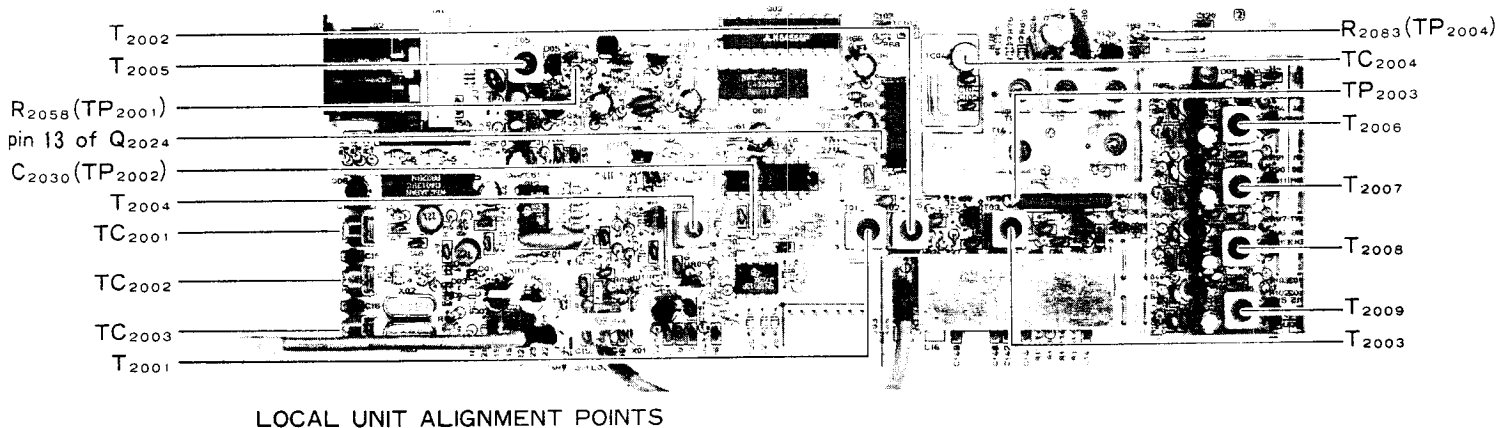

MAIN UNIT ALIGNMENT POINTS

ALIGNMENT

<u>Adjust.</u> <u>Frequency</u>	<u>Adjust.</u> <u>Transformer</u>	<u>Check</u> <u>Freq.</u>	<u>Check</u> <u>Voltage</u>
2.5000	T2006	2.4999 7.4999 0.1000	4.5-6.0V 5.0-6.5V 1.5-3.0V
7.5000	T2007	14.4999	5.0-6.5V
14.5000	T2008	21.4999	5.0-6.5V
21.5000	T2009	29.9999	5.0-6.5V

3. Connect the RF voltmeter to pin 13 of Q2024 and tune the transceiver to 29.9999 MHz. Confirm at least 90mVrms on the RF voltmeter.
4. Disconnect the voltmeters.

E. Reference Oscillator

1. Connect the frequency counter to the exposed lead of C2030 (TP2002).
2. Tune the transceiver to 7.0000 MHz, LSB mode.
3. If the TCXO option is installed, adjust the trimmer accessible through the hole in the TCXO housing, if necessary, for 5.7635 MHz ± 3 Hz on the counter.
4. If the TCXO option is not installed, adjust TC2004, if necessary, for 5.7635 MHz ± 10 Hz on the counter.
5. Remove the counter.

F. Carrier Point

1. Disconnect TMP plug P2001 from J1017 on the Main Unit, and connect the frequency counter to P2001.
2. With the LSB mode selected, adjust TC2003 for 8.2135 MHz ± 10 Hz on the counter.
3. Select USB mode and adjust TC2002 for 8.2165 MHz ± 10 Hz on the counter.
4. Select CW mode and set the DRIVE control fully counterclockwise (minimum).
5. Press the MOX button to transmit, and adjust TC2001 for 8.2158 MHz ± 10 Hz on the counter.
6. Press the MOX button again to return to receive, remove the counter and reconnect P2001 to J1017 (unless performing the next procedure).

G. Carrier Level

1. Disconnect TMP plug P2003 from J1025 on the Main Unit, and connect a 50-ohm resistor in parallel with the RF voltmeter to P2003.
2. Confirm at least 230 mVrms on the RF voltmeter in all modes.
3. Remove the voltmeter and resistor, and reconnect P2003 to J1025.

II. Main Unit - Receiver

A. RX IF, Part I

1. Connect the RF generator to the antenna jack, and the AF voltmeter and an 8-ohm, 3W resistor across the EXT SPKR jack.
2. Tune the transceiver to 14.2000 MHz, USB mode. Set the AF gain to the 10 o'clock position.
3. Tune the RF generator for a 1.5 kHz heterodyne in the receiver, and adjust the injection level for S-7 on the S-meter.
4. Adjust T1003-T1013 for peak on the AF voltmeter, reducing the injection level, if necessary, to keep S-meter deflection near S-7.
5. Leave the test equipment connected for the next three procedures.

B. S-meter Sensitivity, Part I

1. Connect the RF voltmeter to the emitter of Q1008.
2. Tune the transceiver to 14.0000 MHz, USB mode, and adjust VR1004 for minimum on the voltmeter.
3. Adjust VR1002 so that the S-meter just begins to deflect.
4. Disconnect the voltmeter, and continue with the next procedure.

C. RX IF, Part II

1. Set the transceiver to 14.2000 MHz (USB).
2. Tune the RF generator for a 1.5 kHz heterodyne in the receiver, and adjust the injection level for S-7 on the S-meter.
3. Adjust T1003-T1013 for maximum on the S-meter, reducing the injection level, if necessary, to keep S-meter deflection near S-7.
4. Reduce the injection level to +6dBu and adjust VR1001 for S-1 indication.
5. Perform the next procedure.

D. S-Meter Sensitivity, Part II

Perform the preceding procedure, if not done already.


1. Set the RF injection level to +100 dBu and adjust VR1003 for S-meter deflection of 60 dB over S-9.
2. Disconnect the test equipment.

E. RX 1st Mixer

1. In LSB mode, tune to the internal heterodyne near 7.1 MHz.
2. Adjust VR1014 for best null of the heterodyne.

F. Noise Squelch

1. Tune to 14.2000 MHz, USB mode, and set the SQL control to the 10 o'clock position.
2. Adjust VR1005 so the squelch just closes when no signal is received.

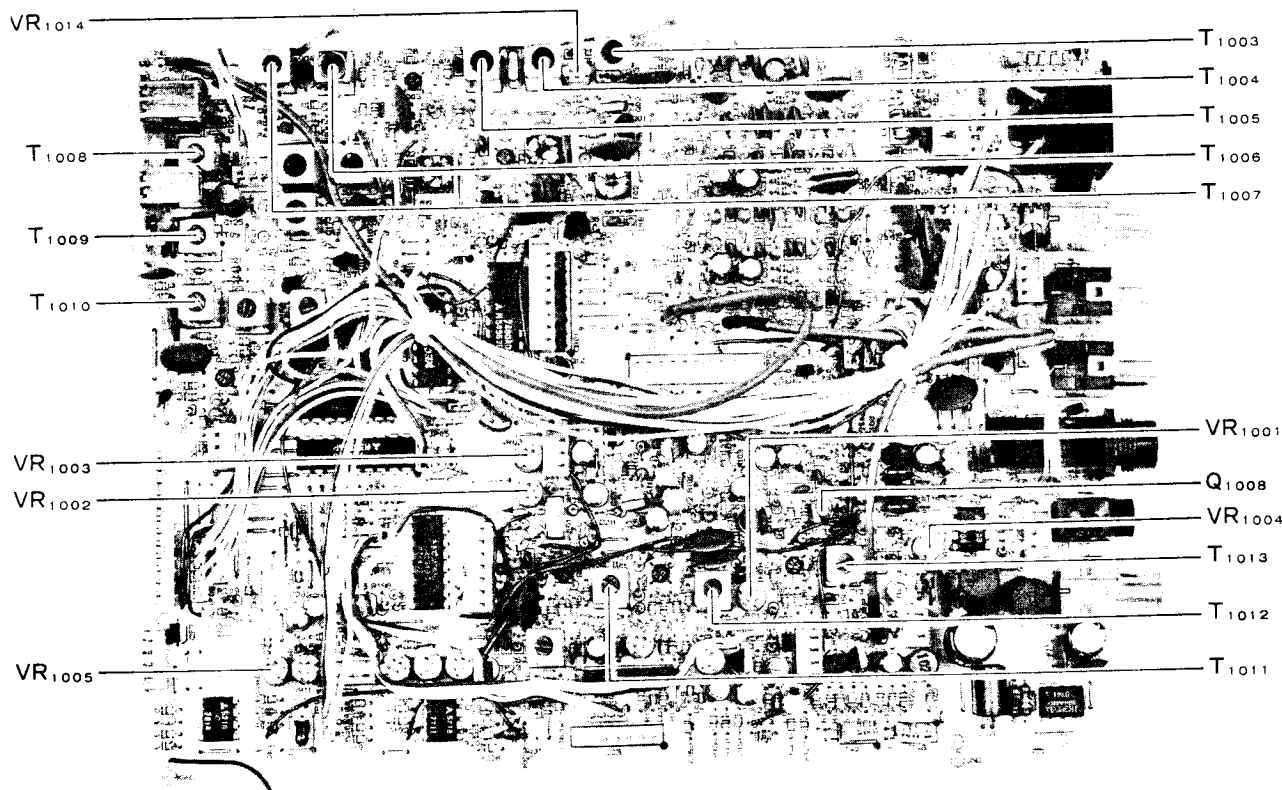

MAIN UNIT ALIGNMENT POINTS
(Receiver Section)

ALIGNMENT

III. Main Unit, Transmitter

A. TX IF

1. Connect the dummy load and wattmeter to the antenna jack, and tune to 14.2000 MHz, CW mode.
2. Press the MOX button and set the DRIVE control for 50W output.
3. Adjust T1014-T1019 for peak on the wattmeter, reducing the DRIVE, if necessary, to keep power below 60W output.
4. Press the MOX button again to return to receive.

B. ALC & PO Meter Sensitivity


1. With the dummy load and wattmeter connected to the antenna jack, and tuned to 14.2000 MHz, CW mode, set the DRIVE control fully clockwise.
2. Press the MOX button and adjust VR1010 for 100W output, and then VR1012 for S-meter deflection to "8" on the PO scale, repeating both adjustments alternately several times.

C. SSB Carrier Balance

1. With the dummy load and wattmeter connected to the antenna jack, and tuned to 14.2000 MHz, USB mode, set the MIC gain fully counterclockwise.
2. Connect the RF voltmeter to J1002.
3. Press the MOX button and adjust VR1007 for minimum on the voltmeter.
4. Press the MOX button again to return to receive, and disconnect the voltmeter.

D. AM Carrier Level


1. With the dummy load and wattmeter connected to the antenna jack, and tuned to 14.2000 MHz, AM mode, set the MIC gain fully counterclockwise.
2. Preset VR1006 fully clockwise.
3. Press the MOX button and set the DRIVE control for 80W output.
4. Adjust VR1006 for 20W output.
5. Press the MOX button again to return to receive, and remove the test equipment.

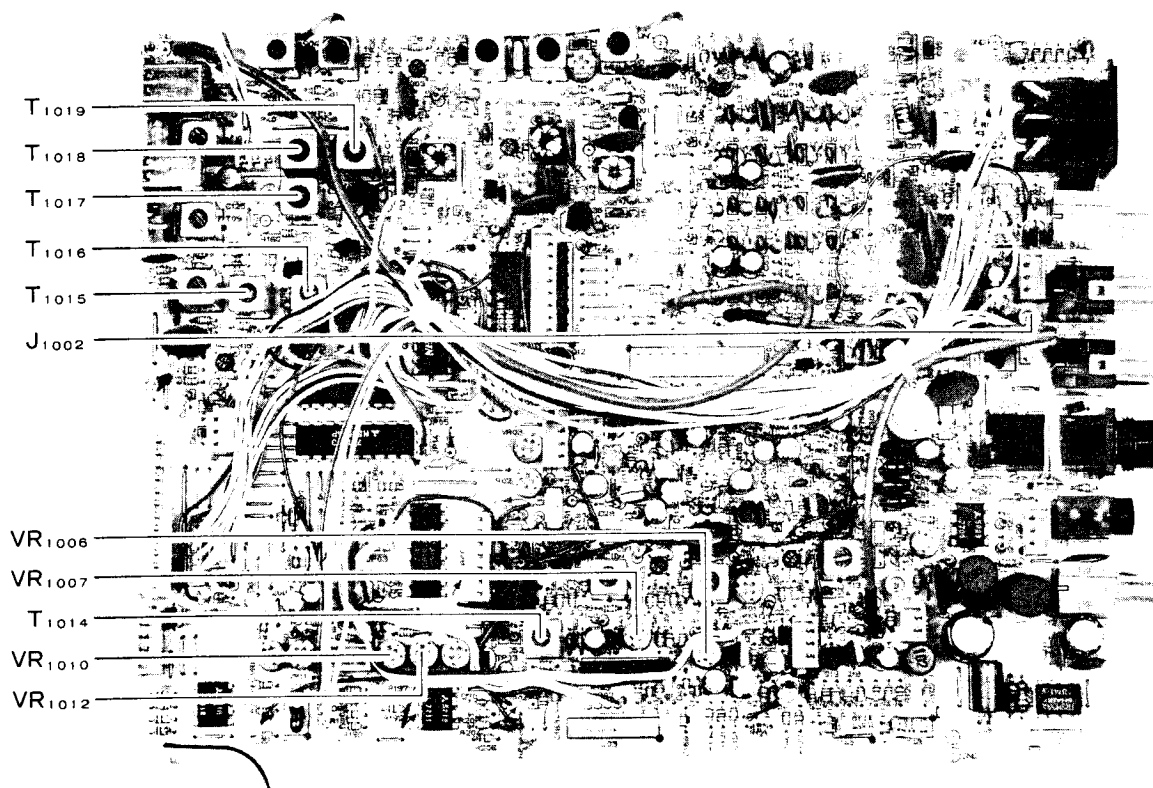

MAIN UNIT ALIGNMENT POINTS
(Transmitter Section)

IV. Noise Blanker Unit



1. Connect the RF generator to the antenna jack, and the DC voltmeter between TP8101 and chassis ground.
2. Tune the transceiver and RF generator to 14.2000 MHz, and inject 40 dBu with no modulation.
3. Press the NB switch and select the USB mode.
4. Adjust T8101 and T8102 for minimum deflection on the voltmeter.
5. Disconnect the test equipment.

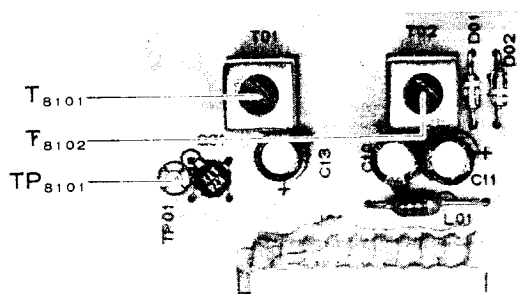

NB UNIT ALIGNMENT POINTS

V. 100W PA Unit (Idling Current)

1. Temporarily remove the jumper indicated below, and connect the DC milliammeter (set to 500 mA range) in its place.
2. Set the transceiver to USB mode, and set the MIC gain fully counterclockwise.
3. Press the MOX button and adjust VR5001 for 200 $\pm$ 50 mA on the milliammeter.
4. Press the MOX button again to return to receive, remove the milliammeter and reinstall the jumper.

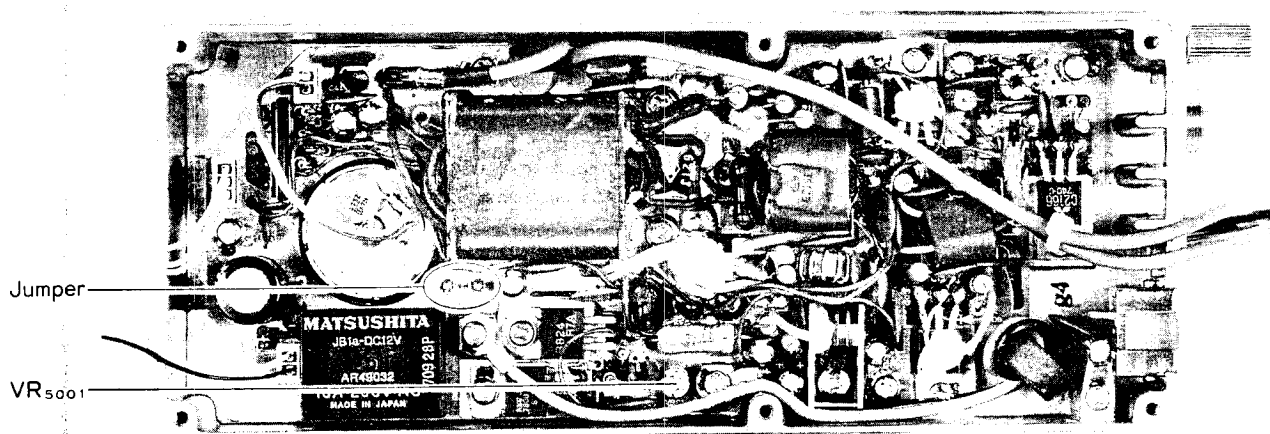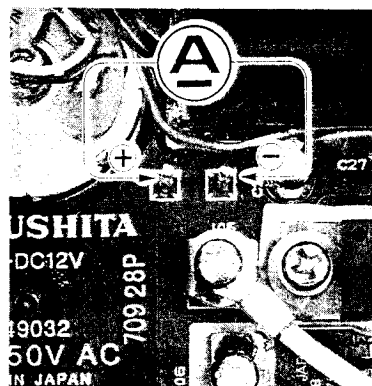


100W PA UNIT ALIGNMENT POINTS


ALIGNMENT

VI. LPF Unit (CM Coupler Balance)

1. Connect the dummy load to the antenna jack, and the DC voltmeter between pin 3 of JP4001 and chassis ground.
2. Tune to 14.2000 MHz, CW mode, and set the DRIVE control fully clockwise.
3. Press the MOX button and adjust TC4001 for minimum deflection on the voltmeter.
4. Press the MOX button again to return to receive, and remove the test equipment.

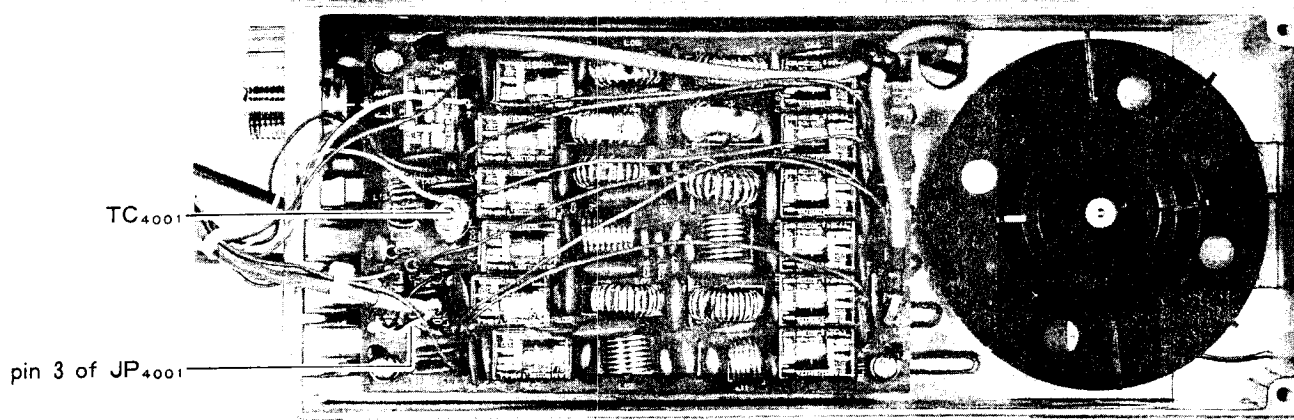

LPF UNIT ALIGNMENT POINTS

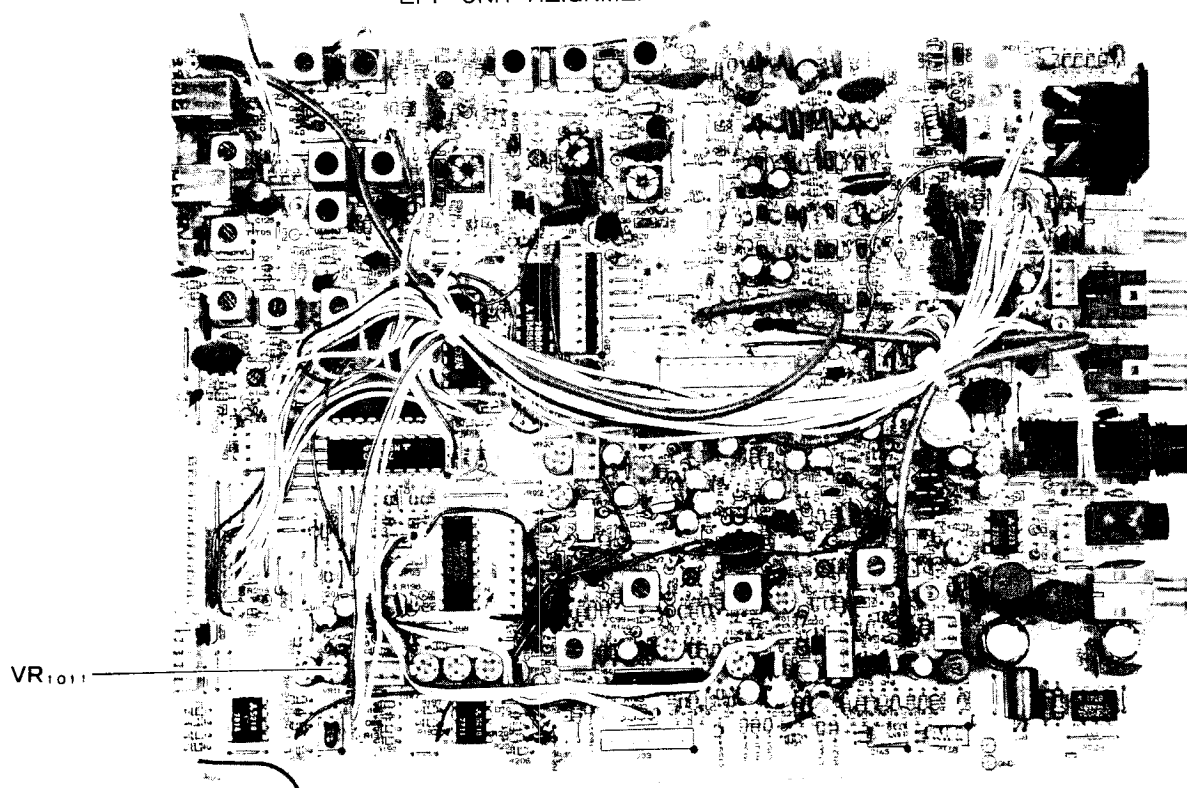

MAIN UNIT ALIGNMENT POINT
(AFP Section)

VII. Main Unit (AFP - Automatic Final Protection)

1. Connect the wattmeter and 16.7-ohm dummy load (three 50-ohm loads in parallel) to the antenna jack.
2. With the transceiver tuned to 14.2000 MHz, CW mode, set the DRIVE control fully clockwise.
3. Press the MOX button and adjust VR1011 for 75W output.
4. Press the MOX button again to return to receive, and disconnect the test equipment.

PARTS LIST

MAIN CHASSIS			
Q01 Q02	G1090778 G1090294 Q9000192 Q9000125	IC IC Thermal Gasket Insulator	L7809 uPC7808H 30F-TO-220 AC316A
VR01 VR02	J60800097 J60800098	Potentiometer Potentiometer	10KA/10KB AF/SQ 10KB/10KB MIC/DRIVE
C01 C02 C03 C04 C05	K19149025 K13179009 K10176102 K13179008 K19149025	Ceramic Cap. Ceramic Cap. Ceramic Cap. Ceramic Cap. Ceramic Cap.	0.1uF 25V Sr 0.047uF 50V F 0.001uF 50V B 0.01uF 50V F 0.1uF 50V Sr
L01 L02	L9190010 L9190047	Toroidal Core Toroidal Core	3A R1 9.3X4.8-5 KQ-1 15-8-7
M01	M0290057	Meter	MG-20L
MO01	M2190004 R0124080A R3056970B	Fan Motor Fan Motor Bracket Fan Blades	MDN-7R1
SP01	M4090030	Loudspeaker	SS-57
J01 J02 J03	P1090194 P0090158 P0090026	Antenna Socket Mic Socket PS(13.5VDC) Socket	FM-MR-M2 FM-214-8SS(A) QS-1B4M
TB01	Q9000078	Grounding Post	BP-19
P01 P03 P05 P07 P08 P09 P10 P11 P12 P13 P14 P15	T9205617 T9205618 T9315504 T9205619 T9205620 T9205621 T9205622 T9205623A T9205624A T9205625 T9311301B T9317811 T9317825	Wire Assy w/P02 Wire Assy w/P04 Wire Assy w/P06 Wire Assy Wire Assy Wire Assy Wire Assy Wire Assy Wire Assy Wire Assy Wire Assy Wire Assy	
	R3510941	Front Panel	
	R3123790	Display Filter	
	R3123800A R3124190 R3123830 R3123840	Knob (Tuning) Rubber Knurl Knobs (AF,MIC) Knobs (SQL,DRIVE)	

R3123850A R3123870A R3123891 R3124020A R3124030B R3124040B R3124050A	Button (CLAR) Button (D LOCK) Button (MODE) Button (POWER) Button (NAR) Button (ATT) Button (NB,MOX)	
R3512400A R3128400	Switch Cover Switch Cover	
R0805150A R0805160A R5512410	Top Cover Bottom Cover Side Sash	
R0510960 R0510970A R4804670B	Heatsink Cover Heatsink Cover Heatsink	
R0125890 R0124060 R0126000	Speaker Clamp Speaker Clamp Clamp	
R7125830 R7125230 R7125850	Mylar Sheet Fiber Insulator Fiber Insulator	
R3124800	Diffusor	
R7049015	Speaker Net	
R3100700 R0100690A	Foot Wire Stand	
R7125160 R7125170 R7125430 R7125450 R7125460 R7125630 R7125631 R7125900 R7129010	Sponge 8x9x4 Sponge 8x8x6 Sponge 15x6x4 Sponge 10x6x4 Sponge 8x6x8 Sponge 7x7x50 w/Double Sided Adhesive Tape Sponge 7x7x50 w/o Double Sided Adhesive Tape Sponge 24x10x4 Rubber 10x10x10.5	
R0116420	Ground Lug Terminal	
R3126040 S4000041 R6100980A	Rubber Foot Rubber Foot (RK-16) Nut for Phone Jack	
R7126400 R7126410 R7126640	Phenol Fiber Sheet	

PARTS LIST

MAIN UNIT			
CPI252003	PCB with components w/ NB UNIT	PCB with components w/o NB UNIT	
CPI253003	PCB with components w/o NB UNIT	PCB with components w/o NB UNIT	
F2942000B Printed Circuit Board			
Q1001	G3801250	FET	2SK125
Q1002	G3801250	FET	2SK125
Q1003	G4800740L	FET	3SK74L
Q1004	G3802410Y	FET	2SK241Y
Q1005	G4800740L	FET	3SK74L
Q1006	G4800740L	FET	3SK74L
Q1007	G4800740L	FET	3SK74L
Q1008	G3304580B	Transistor	2SC458B
Q1009	G3304580B	Transistor	2SC458B
Q1010	G3801040J	FET	2SK104J
Q1011	G3801921G	FET	2SK192AGR
Q1012	G3107331P	Transistor	2SA733AP
Q1013	G3090074	Transistor	BA1A4M
Q1014	G1090633	IC	M5218P
Q1015	G3304580B	Transistor	2SC458B
Q1016	G3304580B	Transistor	2SC458B
Q1017	G3090077	Transistor	BA1L3Z
Q1018	G3304580B	Transistor	2SA458B
Q1019	G3304580B	Transistor	2SA458B
Q1020	G3090074	Transistor	BA1A4M
Q1021	G3304580B	Transistor	2SC458B
Q1022	G1090101	IC	uPC1037H
Q1023	G4800740L	FET	3SK74L
Q1024	G3802410Y	FET	2SK241Y
Q1025	G3802410Y	FET	2SK241Y
Q1026	G3305350B	Transistor	2SC535B
Q1027	G3801250	FET	2SK125
Q1028	G3304580B	Transistor	2SC458B
Q1029	G3090074	Transistor	BA1A4M
Q1030	G3090074	Transistor	BA1A4M
Q1031	G3090078	Transistor	DTA143ES
Q1032	G3320530	Transistor	2SC2053
Q1033	G3090074	Transistor	BA1A4M
Q1034	G1090633	IC	M5218P
Q1035	G3304584B	Transistor	2SC458BTZ
Q1036	G1090749	IC	M5223P
Q1037	G3090074	Transistor	BA1A4M
Q1038	G1090721	IC	M54563P
Q1039	G1090657	IC	uPD4028BC
Q1040	G1090836	IC	M54564P
Q1041	G1090297	IC	uPD4094BC
Q1042	G1090297	IC	uPD4094BC
Q1043	G3090078	Transistor	DTA143ES
Q1044	G3406691	Transistor	2SD669A
Q1045	G1090837	IC	1R3M03A
Q1046	G3090074	Transistor	BA1A4M
Q1047	G3304580B	Transistor	2SC458B
Q1048	G3090077	Transistor	BA1L3Z
Q1049	G3304580B	Transistor	2SC458B
D1001	G2090340	Diode	1SS83
D1002	G2090340	Diode	1SS83
D1003	G2090340	Diode	1SS83
D1004	G2090340	Diode	1SS83

D1005	G2090340	Diode	1SS83
D1006	G2090340	Diode	1SS83
D1007	G2090340	Diode	1SS83
D1008	G2090340	Diode	1SS83
D1009	G2090340	Diode	1SS83
D1010	G2090340	Diode	1SS83
D1011	G2090340	Diode	1SS83
D1012	G2090340	Diode	1SS83
D1013	G2090340	Diode	1SS83
D1014	G2090340	Diode	1SS83
D1015	G2090340	Diode	1SS83
D1016	G2090340	Diode	1SS83
D1017	G2090340	Diode	1SS83
D1018	G2090340	Diode	1SS83
D1019	G2060004	Diode	1SS270TJ
D1021	G2060004	Diode	1SS270TJ
D1022	G2060004	Diode	1SS270TJ
D1023	G2060004	Diode	1SS270TJ
D1024	G2090408	Diode	1SS270
D1025	G2090244	Diode	1SS106
D1026	G2090244	Diode	1SS106
D1027	G2090244	Diode	1SS106
D1028	G2060004	Diode	1SS270TJ
D1029	G2060004	Diode	1SS270TJ
D1030	G2060004	Diode	1SS270TJ
D1031	G2060004	Diode	1SS270TJ
D1032	G2060004	Diode	1SS270TJ
D1033	G2060004	Diode	1SS270TJ
D1034	G2060004	Diode	1SS106
D1035	G2090244	Diode	1SS106
D1036	G2090244	Diode	1SS106
D1037	G2090244	Diode	1SS106
D1038	G2090244	Diode	1SS270
D1039	G2090408	Diode	1SS270
D1040	G2090408	Diode	1SS270
D1041	G2090408	Diode	1SS270TJ
D1042	G2060004	Diode	1SS270
D1044	G2090408	Diode	1SS270TJ
D1045	G2060004	Diode	1SS270TJ
D1046	G2060004	Diode	1SS270TJ
D1047	G2060004	Diode	1SS270TJ
D1048	G2060004	Diode	1SS270TJ
D1049	G2060004	Diode	1SS270TJ
D1050	G2060004	Diode	1SS270TJ
D1051	G2060004	Diode	1SS270
D1052	G2090408	Diode	1SS270
D1053	G2090408	Diode	1SS270
D1054	G2090408	Diode	1SS270
D1055	G2090135	Diode	ND487C2-3R
D1056	G2090340	Diode	1SS83
D1057	G5090340	Diode	1SS83
D1058	G9090007	Diode	MV12
D1059	G2090229	Diode	HZ7B1
D1060	G2090229	Diode	HZ7B1
D1061	G2060004	Diode	1SS270TJ
D1062	G2060004	Diode	1SS270TJ
D1063	G2060004	Diode	1SS270TJ
D1064	G2090408	Diode	1SS270
D1065	G2060004	Diode	1SS270TJ
D1066	G2090408	Diode	1SS270
D1067	G2090118	Diode	1SS97
D1068	G2060004	Diode	1SS270TJ

PARTS LIST

D1069	G2090408	Diode	1SS270	R1031	J01225683	Carbon Film Res.	68k ohm	1/6W	PJ
D1070	G2060004	Diode	1SS270TJ	R1032	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
D1071	G2060004	Diode	1SS270TJ	R1033	J01225684	Carbon Film Res.	680k ohm	1/6W	PJ
D1072	G2090408	Diode	1SS270	R1034	J01225272	Carbon Film Res.	2.7k ohm	1/6W	PJ
D1073	G2090408	Diode	1SS270	R1035	J01225153	Carbon Film Res.	15k ohm	1/6W	PJ
D1074	G2090408	Diode	1SS270	R1036	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
D1077	G2090408	Diode	1SS270	R1037	J01225471	Carbon Film Res.	470 ohm	1/6W	PJ
D1078	G2090408	Diode	1SS270	R1038	J01225560	Carbon Film Res.	56 ohm	1/6W	PJ
D1079	G2090408	Diode	1SS270	R1039	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
D1080	G2060004	Diode	1SS270TJ	R1042	J01225682	Carbon Film Res.	6.8k ohm	1/6W	PJ
D1081	G2060004	Diode	1SS270	R1043	J01225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
D1082	G2060004	Diode	1SS270TJ	R1043	J01225331	Carbon Film Res.	330 ohm	1/6W	PJ
D1083	G2060004	Diode	1SS270TJ	R1044	J01225331	Carbon Film Res.	330 ohm	1/6W	PJ
D1084	G2060004	Diode	1SS270TJ	R1045	J02225104	Carbon Film Res.	100k ohm	1/6W	PJ
D1085	G2060004	Diode	1SS270TJ	R1046	J02225681	Carbon Film Res.	680 ohm	1/6W	PJ
D1086	G2090002	Diode	10D10	R1047	J02225681	Carbon Film Res.	180k ohm	1/6W	PJ
D1087	G2060004	Diode	1SS270	R1048	J02225184	Carbon Film Res.	470 ohm	1/6W	PJ
D1088	G2090408	Diode	1SS270	R1049	J01225471	Carbon Film Res.	150 ohm	1/6W	PJ
D1089	G2090408	Diode	1SS270	R1050	J02225151	Carbon Film Res.	100 ohm	1/6W	PJ
D1090	G2090340	Diode	1SS270	R1051	J02225101	Carbon Film Res.	15k ohm	1/6W	PJ
D1091	G2090408	Diode	1SS270	R1052	J01225153	Carbon Film Res.	27k ohm	1/6W	PJ
D1093	G2060004	Diode	1SS270	R1053	J02225273	Carbon Film Res.	10k ohm	1/6W	PJ
D1094	G2090408	Diode	1SS270TJ	R1054	J02225103	Carbon Film Res.	470 ohm	1/6W	PJ
D1097	G2060004	Diode	1SS270	R1055	J02225471	Carbon Film Res.	150 ohm	1/6W	PJ
D1098	G2060004	Diode	1SS270TJ	R1056	J01225151	Carbon Film Res.	100 ohm	1/6W	PJ
D1099	G2090226	Diode	1SS270TJ	R1057	J02225101	Carbon Film Res.	15k ohm	1/6W	PJ
D1100	G2090408	Diode	HZ4C3	R1058	J01225153	Carbon Film Res.	39k ohm	1/6W	PJ
D1101	G2090408	Diode	1SS270	R1060	J01225393	Carbon Film Res.	10k ohm	1/6W	PJ
			1SS270	R1061	J01225103	Carbon Film Res.	220 ohm	1/6W	PJ
				R1062	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
TH1001	G9090010	Thermistor	112302-2	R1063	J01225221	Carbon Film Res.	100 ohm	1/6W	PJ
TH1002	G9090008	Thermistor	112102-2	R1064	J02225101	Carbon Film Res.	15k ohm	1/6W	PJ
TH1003	G9090015	Thermistor	SDT-100	R1065	J01225153	Carbon Film Res.	33k ohm	1/6W	PJ
TH1004	G9090039	Thermistor	112152-2	R1066	J01225333	Carbon Film Res.	68k ohm	1/6W	PJ
				R1067	J01225683	Carbon Film Res.	2.2k ohm	1/6W	PJ
				R1068	J02225222	Carbon Film Res.	1k ohm	1/6W	PJ
XF1001	H1102090	Crystal Filter	47M15AU	R1069	J02225102	Carbon Film Res.	100k ohm	1/6W	PJ
				R1070	J02225104	Carbon Film Res.	6.8k ohm	1/6W	PJ
R1001	J01225471	Carbon Film Res.	470 ohm	R1071	J01225101	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1002	J02225560	Carbon Film Res.	56 ohm	R1072	J02225682	Carbon Film Res.	1.5M ohm	1/6W	PJ
R1003	J02225102	Carbon Film Res.	1k ohm	R1073	J02225472	Carbon Film Res.	10k ohm	1/6W	PJ
R1004	J01225102	Carbon Film Res.	1k ohm	R1074	J02225155	Carbon Film Res.	10k ohm	1/6W	PJ
R1005	J01225102	Carbon Film Res.	470 ohm	R1075	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1006	J01225471	Carbon Film Res.	470 ohm	R1076	J02225103	Carbon Film Res.	47k ohm	1/6W	PJ
R1007	J02245471	Carbon Film Res.	100 ohm	R1077	J02225103	Carbon Film Res.	1k ohm	1/6W	PJ
R1008	J02245101	Carbon Film Res.	100 ohm	R1078	J02225473	Carbon Film Res.	1.5k ohm	1/6W	PJ
R1009	J01225101	Carbon Film Res.	100 ohm	R1079	J02225104	Carbon Film Res.	10k ohm	1/6W	PJ
R1010	J01225101	Carbon Film Res.	100 ohm	R1080	J02225102	Carbon Film Res.	6.8k ohm	1/6W	PJ
R1011	J01225101	Carbon Film Res.	100 ohm	R1082	J02225152	Carbon Film Res.	3.9k ohm	1/6W	PJ
R1012	J01225101	Carbon Film Res.	100 ohm	R1083	J01225103	Carbon Film Res.	560k ohm	1/6W	PJ
R1013	J01225101	Carbon Film Res.	100 ohm	R1084	J01225682	Carbon Film Res.	100k ohm	1/6W	PJ
R1014	J01225101	Carbon Film Res.	100 ohm	R1087	J01225392	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1015	J01225101	Carbon Film Res.	100 ohm	R1088	J01225564	Carbon Film Res.	100k ohm	1/6W	PJ
R1016	J01225101	Carbon Film Res.	100 ohm	R1089	J01225104	Carbon Film Res.	2.2M ohm	1/6W	PJ
R1017	J01225101	Carbon Film Res.	100 ohm	R1090	J01225472	Carbon Film Res.	10k ohm	1/6W	PJ
R1018	J01225101	Carbon Film Res.	120 ohm	R1091	J01225104	Carbon Film Res.	2.2k ohm	1/6W	PJ
R1019	J01225121	Carbon Film Res.	390 ohm	R1092	J01225225	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1020	J01225391	Carbon Film Res.	100k ohm	R1094	J01225103	Carbon Film Res.	22k ohm	1/6W	PJ
R1022	J01225104	Carbon Film Res.	100k ohm	R1095	J01225222	Carbon Film Res.	470 ohm	1/6W	PJ
R1023	J02225104	Carbon Film Res.	470 ohm	R1096	J01225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1024	J01225471	Carbon Film Res.	470 ohm	R1097	J02225223	Carbon Film Res.	470 ohm	1/6W	PJ
R1025	J01225471	Carbon Film Res.	100 ohm	R1098	J01225471	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1027	J01225101	Carbon Film Res.	39k ohm	R1099	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1030	J01225393	Carbon Film Res.							

PARTS LIST

R1100	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1101	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1102	J01225682	Carbon Film Res.	6.8k ohm	1/6W	PJ
R1103	J01225682	Carbon Film Res.	6.8k ohm	1/6W	PJ
R1104	J02225682	Carbon Film Res.	6.8k ohm	1/6W	PJ
R1105	J01225154	Carbon Film Res.	150k ohm	1/6W	PJ
R1106	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1107	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1108	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1109	J01225223	Carbon Film Res.	22k ohm	1/6W	PJ
R1110	J02225683	Carbon Film Res.	68k ohm	1/6W	PJ
R1111	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1112	J02225332	Carbon Film Res.	3.3k ohm	1/6W	PJ
R1113	J02225220	Carbon Film Res.	22 ohm	1/6W	PJ
R1114	J02225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1115	J02225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1116	J01225332	Carbon Film Res.	3.3k ohm	1/6W	PJ
R1117	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1119	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1120	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1121	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1122	J01225223	Carbon Film Res.	22k ohm	1/6W	PJ
R1123	J01225331	Carbon Film Res.	330 ohm	1/6W	PJ
R1124	J01225153	Carbon Film Res.	15k ohm	1/6W	PJ
R1125	J01225222	Carbon Film Res.	2.2k ohm	1/6W	PJ
R1126	J01225151	Carbon Film Res.	150 ohm	1/6W	PJ
R1127	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1130	J02225222	Carbon Film Res.	2.2k ohm	1/6W	PJ
R1131	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1132	J01225473	Carbon Film Res.	47k ohm	1/6W	PJ
R1133	J01225473	Carbon Film Res.	47k ohm	1/6W	PJ
R1134	J01225681	Carbon Film Res.	680 ohm	1/6W	PJ
R1135	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1136	J02225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1137	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1138	J01225153	Carbon Film Res.	15k ohm	1/6W	PJ
R1139	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1140	J02225222	Carbon Film Res.	2.2k ohm	1/6W	PJ
R1141	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1142	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1143	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1144	J01225223	Carbon Film Res.	22k ohm	1/6W	PJ
R1145	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1146	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1147	J01225331	Carbon Film Res.	330 ohm	1/6W	PJ
R1148	J02225272	Carbon Film Res.	2.7k ohm	1/6W	PJ
R1149	J01225681	Carbon Film Res.	680 ohm	1/6W	PJ
R1150	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1151	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1152	J01225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1153	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1155	J02225332	Carbon Film Res.	3.3k ohm	1/6W	PJ
R1157	J01225224	Carbon Film Res.	220k ohm	1/6W	PJ
R1158	J01225471	Carbon Film Res.	470 ohm	1/6W	PJ
R1159	J01225471	Carbon Film Res.	470 ohm	1/6W	PJ
R1160	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1161	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1162	J01225223	Carbon Film Res.	22k ohm	1/6W	PJ
R1163	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1167	J01225470	Carbon Film Res.	47 ohm	1/6W	PJ
R1168	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1169	J01225680	Carbon Film Res.	68 ohm	1/6W	PJ
R1170	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1172	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1173	J02225333	Carbon Film Res.	33k ohm	1/6W	PJ
R1174	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1175	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1176	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1177	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1178	J01225331	Carbon Film Res.	330 ohm	1/6W	PJ
R1179	J02225224	Carbon Film Res.	220k ohm	1/6W	PJ
R1180	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1181	J02225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1182	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1183	J01225681	Carbon Film Res.	680 ohm	1/6W	PJ
R1184	J01225152	Carbon Film Res.	1.5k ohm	1/6W	PJ
R1185	J02225479	Carbon Film Res.	4.7 ohm	1/6W	PJ
R1186	J02225181	Carbon Film Res.	180 ohm	1/6W	PJ
R1187	J01225391	Carbon Film Res.	390 ohm	1/6W	PJ
R1188	J01225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1189	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1190	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1191	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1192	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1193	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1194	J01225823	Carbon Film Res.	82k ohm	1/6W	PJ
R1195	J02225562	Carbon Film Res.	5.6k ohm	1/6W	PJ
R1197	J01225154	Carbon Film Res.	150k ohm	1/6W	PJ
R1198	J02225473	Carbon Film Res.	47k ohm	1/6W	PJ
R1200	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1201	J02225105	Carbon Film Res.	1M ohm	1/6W	PJ
R1202	J02225333	Carbon Film Res.	33k ohm	1/6W	PJ
R1203	J01225223	Carbon Film Res.	22k ohm	1/6W	PJ
R1204	J01225334	Carbon Film Res.	330k ohm	1/6W	PJ
R1206	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1208	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1209	J02225562	Carbon Film Res.	5.6k ohm	1/6W	PJ
R1210	J02225153	Carbon Film Res.	15k ohm	1/6W	PJ
R1211	J02225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1212	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1213	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1214	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1216	J02225472	Carbon Film Res.	4.7k ohm	1/6W	PJ
R1217	J01225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1218	J01225823	Carbon Film Res.	82k ohm	1/6W	PJ
R1219	J02225222	Carbon Film Res.	2.2k ohm	1/6W	PJ
R1220	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1221	J02225102	Carbon Film Res.	1k ohm	1/6W	PJ
R1222	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1223	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1224	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1225	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R1226	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1227	J01225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1230	J02049046	Carbon Film Res.	8.87k ohm	1/4W	PJ
R1231	J02049102	Carbon Film Res.	1.43k ohm	1/4W	PJ
R1233	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1234	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R1235	J02225473	Carbon Film Res.	47k ohm	1/6W	PJ
R1236	J02225103	Carbon Film Res.	10k ohm	1/6W	PJ
R1237	J01225471	Carbon Film Res.	470 ohm	1/6W	PJ
R1238	J02225104	Carbon Film Res.	100k ohm	1/6W	PJ
R1239	J01225473	Carbon Film Res.	47k ohm	1/6W	PJ
R1240	J01225561	Carbon Film Res.	560 ohm	1/6W	PJ

PARTS LIST

Part No.	Part Description	Value	Notes	Part No.	Part Description	Value	Notes
R1241	J01225683	Carbon Film Res.	1/6W	C1044	K28129001	Ceramic Cap.	0.01uF
R1242	J01225102	Carbon Film Res.	1/6W	C1045	K40129004	Al Electro Cap.	10uF
R1243	J02225152	Carbon Film Res.	1/6W	C1046	K00175330	Ceramic Cap.	33pF
R1244	J01225221	Carbon Film Res.	1/6W	C1047	K28129001	Ceramic Cap.	0.01uF
R1245	J02225104	Carbon Film Res.	1/6W	C1048	K00175270	Ceramic Cap.	27pF
R1246	J02225102	Carbon Film Res.	1/6W	C1049	K00175121	Ceramic Cap.	120pF
VR1001	J51745472	POT.	B	C1050	K00175270	Ceramic Cap.	27pF
VR1002	J51745103	POT.	B	C1051	K00175330	Ceramic Cap.	33pF
VR1003	J51745105	POT.	B	C1052	K28129001	Ceramic Cap.	0.01uF
VR1004	J51745102	POT.	B	C1053	K40129004	Al Electro Cap.	10uF
VR1005	J51745474	POT.	B	C1054	K00173080	Ceramic Cap.	8pF
VR1006	J51745103	POT.	B	C1055	K28129001	Ceramic Cap.	0.01uF
VR1007	J51745103	POT.	B	C1056	K00175180	Ceramic Cap.	18pF
VR1008	J51745103	POT.	B	C1057	K00175101	Ceramic Cap.	100pF
VR1009	J51745472	POT.	B	C1058	K00175180	Ceramic Cap.	18pF
VR1010	J51745103	POT.	B	C1059	K00175150	Ceramic Cap.	15pF
VR1011	J51745474	POT.	B	C1060	K28129001	Ceramic Cap.	0.01uF
VR1012	J51745103	POT.	B	C1061	K40129004	Al Electro Cap.	10uF
VR1013	J51745474	POT.	B	C1062	K28129001	Ceramic Cap.	0.01uF
VR1014	J51745471	POT.	B	C1063	K28129001	Ceramic Cap.	0.01uF
C1001	K19149025	Ceramic Cap.	25V	C1064	K13179009	Ceramic Cap.	0.047uF
C1002	K13179009	Ceramic Cap.	50V	C1065	K00173100	Ceramic Cap.	10pF
C1003	K28129001	Ceramic Cap.	16V	C1066	K13179009	Ceramic Cap.	0.047uF
C1004	K00175680	Ceramic Cap.	50V	C1067	K13179009	Ceramic Cap.	0.047uF
C1005	K00175820	Ceramic Cap.	50V	C1070	K28129001	Ceramic Cap.	0.01uF
C1006	K00175151	Ceramic Cap.	50V	C1071	K28129001	Ceramic Cap.	0.01uF
C1007	K00175220	Ceramic Cap.	50V	C1072	K13179009	Ceramic Cap.	0.047uF
C1008	K13179009	Ceramic Cap.	50V	C1073	K00175470	Ceramic Cap.	47uF
C1009	K00179011	Ceramic Cap.	50V	C1074	K00175101	Ceramic Cap.	100pF
C1010	K19149025	Ceramic Cap.	50V	C1075	K28129001	Ceramic Cap.	0.01uF
C1011	K19149025	Ceramic Cap.	50V	C1076	K28129001	Ceramic Cap.	0.01uF
C1012	K40129004	Al Electro Cap.	25V	C1077	K13179009	Ceramic Cap.	0.047uF
C1013	K19149021	Ceramic Cap.	25V	C1078	K28129001	Ceramic Cap.	0.01uF
C1014	K00175221	Ceramic Cap.	50V	C1079	K22170805	Chip Cap.	1000pF
C1015	K00175511	Ceramic Cap.	50V	C1080	K28129001	Ceramic Cap.	0.01uF
C1016	K00175221	Ceramic Cap.	50V	C1081	K28179001	Ceramic Cap.	1000pF
C1017	K00175221	Ceramic Cap.	50V	C1082	K22170805	Ceramic Cap.	0.01uF
C1018	K28129001	Ceramic Cap.	16V	C1083	K28129001	Ceramic Cap.	100pF
C1019	K00175221	Ceramic Cap.	50V	C1084	K00175101	Ceramic Cap.	10pF
C1020	K28129001	Ceramic Cap.	16V	C1085	K00173100	Ceramic Cap.	10pF
C1021	K40129004	Al Electro Cap.	25V	C1087	K00173100	Ceramic Cap.	0.047uF
C1022	K00175151	Ceramic Cap.	50V	C1088	K19149021	Ceramic Cap.	0.01uF
C1023	K13179009	Ceramic Cap.	50V	C1089	K28129001	Ceramic Cap.	0.01uF
C1024	K00175181	Ceramic Cap.	50V	C1090	K19149025	Ceramic Cap.	0.01uF
C1025	K00175471	Ceramic Cap.	50V	C1091	K28129001	Ceramic Cap.	0.01uF
C1026	K00175181	Ceramic Cap.	50V	C1092	K12171102	Ceramic Cap.	0.01uF
C1027	K00175151	Ceramic Cap.	50V	C1093	K28129001	Ceramic Cap.	1000pF
C1028	K00175151	Ceramic Cap.	50V	C1094	K19149025	Ceramic Cap.	0.01uF
C1029	K40129004	Al Electro Cap.	16V	C1095	K28129001	Ceramic Cap.	0.01uF
C1030	K00175680	Ceramic Cap.	50V	C1097	K28129001	Ceramic Cap.	0.01uF
C1031	K13179009	Ceramic Cap.	50V	C1098	K28129001	Ceramic Cap.	0.01uF
C1032	K00175121	Ceramic Cap.	50V	C1099	K28129001	Ceramic Cap.	0.01uF
C1033	K00175221	Ceramic Cap.	50V	C1100	K28129001	Ceramic Cap.	0.01uF
C1034	K00175121	Ceramic Cap.	50V	C1101	K28129001	Ceramic Cap.	0.01uF
C1035	K00175680	Ceramic Cap.	50V	C1102	K28129001	Ceramic Cap.	0.01uF
C1036	K28129001	Ceramic Cap.	16V	C1103	K28129001	Ceramic Cap.	0.01uF
C1037	K40129004	Al Electro Cap.	16V	C1104	K28129001	Ceramic Cap.	0.01uF
C1038	K00175390	Ceramic Cap.	50V	C1105	K28129001	Ceramic Cap.	0.01uF
C1039	K13179009	Ceramic Cap.	50V	C1106	K28129001	Ceramic Cap.	0.01uF
C1040	K00175680	Ceramic Cap.	50V	C1107	K00173100	Ceramic Cap.	10pF
C1041	K00175151	Ceramic Cap.	50V	C1108	K40179006	Al Electro Cap.	2.2uF
C1042	K00175680	Ceramic Cap.	50V	C1109	K28129001	Ceramic Cap.	1000pF
C1043	K00175390	Ceramic Cap.	50V	C1110	K00175101	Ceramic Cap.	100pF
				C1111	K28129001	Ceramic Cap.	0.01uF
				C1112	K00175101	Ceramic Cap.	100pF

PARTS LIST

C1113	K40129013	Ceramic Cap.	22uF	16V	SL
C1114	K00175221	Ceramic Cap.	220pF	50V	
C1115	K50170015	Film Cap.	0.022uF	50V	
C1116	K40179001	Al Electro Cap.	1uF	50V	F
C1117	K13179009	Ceramic Cap.	0.0047uF	50V	
C1118	K70147155	Tantalum Cap.	1.5uF	25V	Y
C1119	K28129001	Ceramic Cap.	0.01uF	16V	E
C1120	K12171102	Ceramic Cap.	1000pF	50V	Y
C1121	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1122	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1123	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1124	K40179001	Al Electro Cap.	1uF	50V	
C1125	K40129012	Al Electro Cap.	10uF	16V	
C1126	K40129012	Al Electro Cap.	10uF	16V	
C1127	K40149011	Al Electro Cap.	4.7uF	25V	
C1128	K50170007	Film Cap.	0.001uF	50V	
C1129	K50170009	Film Cap.	0.0022uF	50V	
C1130	K50170011	Film Cap.	0.0047uF	50V	
C1131	K40129012	Al Electro Cap.	10uF	16V	
C1132	K40129012	Al Electro Cap.	10uF	16V	
C1133	K50177222	Film Cap.	10uF	50V	
C1134	K40149011	Al Electro Cap.	4.7uF	25V	
C1135	K40129012	Al Electro Cap.	0.47uF	50V	
C1136	K40179005	Al Electro Cap.	1000pF	50V	B
C1137	K28179001	Ceramic Cap.	10uF	16V	B
C1138	K40129012	Al Electro Cap.	10uF	16V	B
C1142	K28179001	Ceramic Cap.	1uF	50V	
C1143	K40179013	Al Electro Cap.	1000pF	50V	
C1144	K28179001	Ceramic Cap.	10uF	16V	
C1145	K40129012	Al Electro Cap.	0.01uF	16V	B
C1146	K28129001	Ceramic Cap.	10uF	16V	B
C1147	K28129001	Ceramic Cap.	1000pF	16V	
C1148	K40129012	Al Electro Cap.	10uF	16V	
C1149	K40149011	Al Electro Cap.	4.7uF	25V	
C1150	K40149011	Al Electro Cap.	4.7uF	25V	Y
C1151	K28129001	Ceramic Cap.	0.01uF	16V	B
C1152	K40129013	Al Electro Cap.	22uF	50V	
C1153	K28179001	Ceramic Cap.	1000pF	25V	B
C1154	K40149011	Al Electro Cap.	4.7uF	16V	Y
C1155	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1156	K00175220	Ceramic Cap.	22pF	50V	Y
C1157	K40149011	Al Electro Cap.	4.7uF	25V	Y
C1158	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1159	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1160	K00175220	Ceramic Cap.	22pF	50V	SL
C1161	K40129004	Al Electro Cap.	10uF	16V	Y
C1162	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1163	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1164	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1165	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1166	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1167	K13179009	Ceramic Cap.	0.047uF	50V	F
C1168	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1169	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1170	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1171	K28179001	Ceramic Cap.	1000pF	50V	B
C1172	K28179001	Ceramic Cap.	1000pF	50V	B
C1173	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1174	K00175470	Ceramic Cap.	47pF	50V	SL
C1175	K00172020	Ceramic Cap.	2pF	50V	SL
C1176	K00175470	Ceramic Cap.	47pF	50V	SL
C1177	K28179001	Ceramic Cap.	1000pF	50V	B
C1178	K12171102	Ceramic Cap.	1000pF	50V	E
C1179	K00175120	Ceramic Cap.	12pF	50V	SL
C1180	K19149021	Ceramic Cap.	0.047uF	25V	
C1181	K19149025	Ceramic Cap.	0.1uF	25V	
C1182	K19149021	Ceramic Cap.	0.047uF	25V	
C1183	K50177223	Film Cap.	0.022uF	50V	
C1184	K50177223	Film Cap.	0.022uF	50V	
C1185	K50177223	Film Cap.	0.022uF	50V	
C1186	K40149001	Al Electro Cap.	4.7uF	25V	
C1187	K40129012	Al Electro Cap.	10uF	16V	
C1188	K50170014	Film Cap.	0.01uF	50V	
C1189	K13179009	Ceramic Cap.	0.047uF	50V	F
C1191	K19149021	Ceramic Cap.	0.047uF	25V	
C1192	K19149003	Ceramic Cap.	1500pF	25V	
C1193	K19149025	Ceramic Cap.	0.1uF	25V	
C1194	K13179009	Ceramic Cap.	0.047uF	50V	F
C1195	K13179009	Ceramic Cap.	0.047uF	50V	F
C1196	K70167224	Tantalum Cap.	0.22uF	40V	Y
C1197	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1198	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1200	K40129012	Al Electro Cap.	10uF	16V	
C1201	K40179005	Al Electro Cap.	4.7uF	25V	
C1202	K40149011	Al Electro Cap.	4.7uF	25V	Y
C1203	K28129001	Ceramic Cap.	0.01uF	16V	B
C1204	K28179001	Ceramic Cap.	1000pF	50V	B
C1205	K28179001	Ceramic Cap.	1000pF	50V	B
C1206	K28179001	Ceramic Cap.	1000pF	50V	B
C1207	K28179001	Ceramic Cap.	1000pF	50V	B
C1208	K22170817	Chip Cap.	0.01uF	50V	
C1209	K19149021	Ceramic Cap.	0.047uF	25V	
C1210	K40129007	Al Electro Cap.	100uF	16V	SL
C1211	K00175471	Ceramic Cap.	470pF	50V	
C1212	K40129006	Al Electro Cap.	470uF	16V	F
C1213	K13179009	Ceramic Cap.	0.047uF	50V	B
C1214	K22170817	Chip Cap.	0.01uF	16V	Y
C1215	K40129004	Al Electro Cap.	10uF	16V	
C1216	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1217	K13179009	Ceramic Cap.	0.01uF	16V	F
C1218	K22171008	Chip Cap.	0.047uF	50V	F
C1219	K22171008	Chip Cap.	0.047uF	50V	F
C1220	K00175510	Ceramic Cap.	51pF	50V	SL
C1221	K00175510	Ceramic Cap.	51pF	50V	SL
C1222	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1223	K13179009	Ceramic Cap.	0.01uF	16V	Y
C1224	K40129016	Al Electro Cap.	22uF	16V	
C1225	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1226	K19149023	Ceramic Cap.	0.068uF	25V	
C1227	K40179009	Al Electro Cap.	2.2uF	50V	
C1228	K40179001	Al Electro Cap.	1uF	50V	
C1229	K40129013	Al Electro Cap.	22uF	16V	
C1230	K40129012	Al Electro Cap.	10uF	16V	
C1231	K00175470	Ceramic Cap.	47pF	50V	SL
C1232	K00175560	Ceramic Cap.	56pF	50V	SL
C1233	K28179001	Ceramic Cap.	1000pF	50V	B
C1234	K28129001	Ceramic Cap.	0.01uF	16V	Y
C1235	K40179001	Al Electro Cap.	0.01uF	16V	Y
C1236	K40179001	Al Electro Cap.	1uF	50V	
C1237	K40179001	Al Electro Cap.	1uF	50V	
C1238	K40129038	Al Electro Cap.	10uF	16V	
C1239	K19149025	Ceramic Cap.	0.1uF	25V	
C1240	K13179009	Ceramic Cap.	0.047uF	50V	F

PARTS LIST

NB UNIT				LOCAL UNIT			
CPL1256001		PCB with Components		CPL1260002		PCB with Components w/ PLL-LPF UNIT	
F2949101		Printed Circuit Board		CPL1265002		PCB with Components w/o PLL-LPF UNIT	
F2949101		Printed Circuit Board		F2943101C		Printed Circuit Board	
Q8101	G4800740L	FET	3SK74L	Q2001	G1090297	IC	uPD4094BC
Q8102	G3803027Y	FET	2SK302Y TE85R	Q2002	G1090836	IC	M56564P
Q8103	G3330527F	Transistor	2SC3052-T14-2F	Q2003	G3305350B	Transistor	2SC535B
Q8104	G3330527F	Transistor	2SC3052-T14-2F	Q2004	G3304580C	Transistor	2SC458C
D8101	G2090244	Diode	1SS106	Q2005	G3304580C	Transistor	2SC458C
D8102	G2090244	Diode	1SS106	Q2006	G3304580C	Transistor	2SC458C
D8103	G2070009	Diode	1SS184 TE85R	Q2007	G3304580C	Transistor	2SC458C
R8101	J24205103	Chip Res.	10k ohm	Q2008	G3304580C	Transistor	2SC458C
R8102	J24205473	Chip Res.	47k ohm	Q2009	G1090012	IC	SN16313P
R8103	J24205101	Chip Res.	100 ohm	Q2010	G3304580C	Transistor	2SC458C
R8104	J24205153	Chip Res.	15k ohm	Q2011	G3304580C	Transistor	2SC458C
R8105	J24205101	Chip Res.	100 ohm	Q2012	G1090012	IC	SN16313P
R8106	J24205104	Chip Res.	100 ohm	Q2013	G1090838	IC	M54459L
R8107	J24205101	Chip Res.	100 ohm	Q2014	G1090280	IC	uPD4013BC
R8108	J24205102	Chip Res.	100 ohm	Q2015	G3304580C	Transistor	2SC458C
R8109	J24205102	Chip Res.	1k ohm	Q2016	G3305350B	Transistor	2SC535B
R8110	J24205222	Chip Res.	2.2k ohm	Q2017	G3801921G	Transistor	2SK192AGR
R8111	J24205223	Chip Res.	22k ohm	Q2018	G1090834	IC	CX-1925B
R8112	J24205102	Chip Res.	1k ohm	Q2019	G3801840Y	FET	2SK184Y
R8113	J24205224	Chip Res.	220k ohm	Q2020	G3307320B	Transistor	2SC732TMBL
R8114	J24205472	Chip Res.	4.7k ohm	Q2021	G1090101	IC	uPC1037H
R8115	J24205472	Chip Res.	4.7k ohm	Q2022	G3305350B	Transistor	2SC535B
R8116	J24205000	Chip Res.	0 ohm	Q2024	G1090834	IC	CX-7925B
C8101	K22170235	Chip Cap.	100pF	Q2025	G3304580C	Transistor	2SC458C
C8102	K22171004	Chip Cap.	0.01uF	Q2026	G3801840Y	FET	2SK184Y
C8103	K22171004	Chip Cap.	0.01uF	Q2027	G3307320B	Transistor	2SC732TMBL
C8104	K22171004	Chip Cap.	0.01uF	Q2028	G3305350B	Transistor	2SC535B
C8105	K22171004	Chip Cap.	0.01uF	Q2029	G3305350B	Transistor	2SC535B
C8106	K22170219	Chip Cap.	0.01uF	Q2030	G3305350B	Transistor	2SC535B
C8107	K22171004	Chip Cap.	22pF	Q2031	G3305350B	Transistor	2SC535B
C8108	K22170243	Chip Cap.	0.01uF	Q2032	G3305350B	Transistor	2SC535B
C8109	K22170243	Chip Cap.	220pF	Q2034	G3320530	Transistor	2SC2053
C8110	K40129004	Al Electro Cap.	10uF	D2001	G2090408	Diode	1SS270
C8111	K40129004	Al Electro Cap.	10uF	D2002	G2090408	Diode	1SS270
C8112	K22171004	Chip Cap.	0.01uF	D2003	G2090027	Diode	1SS53
C8113	K40129004	Al Electro Cap.	10uF	D2004	G2090027	Diode	1SS53
C8114	K22170235	Chip Cap.	100pF	D2005	G2090180	Diode	FC-52M-5
C8115	K22171004	Chip Cap.	0.01uF	D2006	G2090408	Diode	1SS270
L8101	L1190189	RFC		D2007	G2060004	Diode	1SS270 TJ
T8101	L00221199	Coil	8.20MHZ	D2008	G2090161	Diode	1SV55
T8102	L00221199	Coil	8.20MHZ	D2009	G2090237	Diode	MA190
J8101	P0090481	Connector		D2010	G2090027	Diode	1SS53
				D2011	G2090161	Diode	1SV55
				D2012	G2090027	Diode	1SS53
				D2013	G2090161	Diode	1SV55
				D2014	G2090027	Diode	1SS53
				D2015	G2090161	Diode	1SV55
				D2016	G2090027	Diode	1SS53
				X2001	H0102853	Crystal	HC-48/U 38.840MHZ
				X2002	H0102852	Crystal	HC-48/U 8.2165MHZ
				X2003	H0102851	Crystal	HC-48/U 8.2135MHZ
				X2004	H0102850	Crystal	HC-48/U 5.400MHZ

PARTS LIST

CF2001	H3900390	Ceramic Filter	SFT-5.74MA	R2061	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2001	J02225472	Carbon Film Res.	4.7k ohm	R2062	J01225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2002	J02225472	Carbon Film Res.	4.7k ohm	R2063	J02225101	Carbon Film Res.	100 ohm	1/6W	UJ
R2003	J02225101	Carbon Film Res.	100 ohm	R2064	J02225104	Carbon Film Res.	100k ohm	1/6W	UJ
R2004	J02225471	Carbon Film Res.	470 ohm	R2065	J02225471	Carbon Film Res.	470 ohm	1/6W	UJ
R2005	J02225154	Carbon Film Res.	150k ohm	R2066	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2006	J02225101	Carbon Film Res.	100 ohm	R2067	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2007	J02225471	Carbon Film Res.	470 ohm	R2068	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2008	J02225683	Carbon Film Res.	68k ohm	R2069	J02225221	Carbon Film Res.	220 ohm	1/6W	PJ
R2009	J02225470	Carbon Film Res.	47 ohm	R2070	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2010	J02225101	Carbon Film Res.	100 ohm	R2071	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2011	J02225103	Carbon Film Res.	100 ohm	R2072	J02225104	Carbon Film Res.	100k ohm	1/6W	PJ
R2012	J02225101	Carbon Film Res.	100 ohm	R2073	J01225182	Carbon Film Res.	6.8k ohm	1/6W	PJ
R2013	J02225101	Carbon Film Res.	100 ohm	R2074	J01225182	Carbon Film Res.	1.8k ohm	1/6W	UJ
R2014	J02225472	Carbon Film Res.	4.7k ohm	R2075	J01225272	Carbon Film Res.	2.7k ohm	1/6W	UJ
R2015	J02225472	Carbon Film Res.	4.7k ohm	R2076	J01225101	Carbon Film Res.	100 ohm	1/6W	PJ
R2016	J02225102	Carbon Film Res.	1k ohm	R2077	J01225101	Carbon Film Res.	1.5k ohm	1/6W	UJ
R2017	J02225223	Carbon Film Res.	22k ohm	R2078	J01225101	Carbon Film Res.	3.3k ohm	1/6W	UJ
R2018	J02225103	Carbon Film Res.	10k ohm	R2079	J01225182	Carbon Film Res.	22k ohm	1/6W	UJ
R2019	J02225102	Carbon Film Res.	1k ohm	R2080	J01225272	Carbon Film Res.	100k ohm	1/6W	UJ
R2020	J02225683	Carbon Film Res.	68k ohm	R2081	J01225101	Carbon Film Res.	10k ohm	1/6W	UJ
R2021	J01225470	Carbon Film Res.	47 ohm	R2082	J02225152	Carbon Film Res.	10k ohm	1/6W	UJ
R2022	J01225101	Carbon Film Res.	100 ohm	R2083	J01225332	Carbon Film Res.	10k ohm	1/6W	PJ
R2023	J02225101	Carbon Film Res.	100 ohm	R2084	J02225223	Carbon Film Res.	10k ohm	1/6W	UJ
R2024	J02225223	Carbon Film Res.	22k ohm	R2085	J02225104	Carbon Film Res.	100k ohm	1/6W	UJ
R2025	J02225103	Carbon Film Res.	10k ohm	R2086	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2026	J01225470	Carbon Film Res.	47 ohm	R2087	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2027	J02225471	Carbon Film Res.	470 ohm	R2088	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2028	J01225101	Carbon Film Res.	100 ohm	R2089	J02225101	Carbon Film Res.	22k ohm	1/6W	UJ
R2029	J01225101	Carbon Film Res.	100 ohm	R2090	J02225223	Carbon Film Res.	100k ohm	1/6W	UJ
R2030	J02225471	Carbon Film Res.	470 ohm	R2091	J02225104	Carbon Film Res.	10k ohm	1/6W	UJ
R2031	J02225470	Carbon Film Res.	47 ohm	R2092	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2032	J02225223	Carbon Film Res.	22k ohm	R2093	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2033	J02225103	Carbon Film Res.	10k ohm	R2094	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2034	J01225681	Carbon Film Res.	680 ohm	R2095	J02225101	Carbon Film Res.	100 ohm	1/6W	UJ
R2035	J01225101	Carbon Film Res.	100 ohm	R2096	J02225223	Carbon Film Res.	22k ohm	1/6W	UJ
R2036	J02225472	Carbon Film Res.	4.7k ohm	R2097	J02225104	Carbon Film Res.	100k ohm	1/6W	UJ
R2037	J02225472	Carbon Film Res.	4.7k ohm	R2098	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2038	J02225681	Carbon Film Res.	680 ohm	R2099	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2039	J02225101	Carbon Film Res.	100 ohm	R2100	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2040	J02225471	Carbon Film Res.	470 ohm	R2101	J02225101	Carbon Film Res.	22k ohm	1/6W	UJ
R2041	J02225154	Carbon Film Res.	150k ohm	R2102	J02225223	Carbon Film Res.	100k ohm	1/6W	UJ
R2042	J02225153	Carbon Film Res.	15k ohm	R2103	J02225104	Carbon Film Res.	10k ohm	1/6W	UJ
R2043	J02225101	Carbon Film Res.	100 ohm	R2104	J02225103	Carbon Film Res.	15k ohm	1/6W	UJ
R2044	J02225471	Carbon Film Res.	470 ohm	R2105	J02225153	Carbon Film Res.	15k ohm	1/6W	UJ
R2045	J02225104	Carbon Film Res.	100k ohm	R2106	J02225103	Carbon Film Res.	10k ohm	1/6W	UJ
R2046	J01225101	Carbon Film Res.	100 ohm	R2107	J02225101	Carbon Film Res.	100 ohm	1/6W	UJ
R2047	J02225331	Carbon Film Res.	330 ohm	R2108	J02225104	Carbon Film Res.	100k ohm	1/6W	UJ
R2048	J02225104	Carbon Film Res.	100k ohm	R2109	J02225101	Carbon Film Res.	100 ohm	1/6W	UJ
R2049	J02225223	Carbon Film Res.	22k ohm	R2110	J02225471	Carbon Film Res.	470 ohm	1/6W	UJ
R2050	J01225332	Carbon Film Res.	3.3k ohm	R2111	J02225681	Carbon Film Res.	680 ohm	1/6W	UJ
R2051	J02225103	Carbon Film Res.	10k ohm	R2112	J02225471	Carbon Film Res.	470 ohm	1/6W	UJ
R2052	J02225272	Carbon Film Res.	2.7k ohm	R2113	J02225100	Carbon Film Res.	10 ohm	1/6W	UJ
R2053	J02225272	Carbon Film Res.	2.7k ohm	R2114	J02225560	Carbon Film Res.	56 ohm	1/6W	UJ
R2054	J01225101	Carbon Film Res.	100 ohm	R2115	J02225471	Carbon Film Res.	470 ohm	1/6W	UJ
R2055	J01225273	Carbon Film Res.	27k ohm	R2116	J01225560	Carbon Film Res.	56 ohm	1/6W	PJ
R2056	J01225182	Carbon Film Res.	1.8k ohm	R2120	J01225560	Carbon Film Res.	56 ohm	1/6W	PJ
R2057	J02225152	Carbon Film Res.	1.5k ohm	TH2001	G9090008	Thermistor	11-2102-2		
R2058	J01225103	Carbon Film Res.	10k ohm	C2001	K12171102	Ceramic Cap.	1000pF	50V	E
R2059	J01225221	Carbon Film Res.	220 ohm	C2002	K02175560	Ceramic Cap.	56pF	50V	CH
R2060	J01225221	Carbon Film Res.	220 ohm	C2003	K02175150	Ceramic Cap.	15pF	50V	CH
				C2004	K12171102	Ceramic Cap.	1000pF	50V	E
				C2005	K02172059	Ceramic Cap.	0.5pF	50V	CH
				C2006	K02175120	Ceramic Cap.	12pF	50V	CH
				C2007	K28179001	Ceramic Cap.	1000pF	50V	B
				C2008	K02172030	Ceramic Cap.	3pF	50V	CH
				C2009	K12171102	Ceramic Cap.	1000pF	50V	E

PARTS LIST

C2010	K12171102	Ceramic Cap.	1000pF	50V	E
C2011	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2012	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2013	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2014	K02175150	Ceramic Cap.	15pF	50V	CH
C2015	K02175150	Ceramic Cap.	10pF	50V	CH
C2016	K02175150	Ceramic Cap.	15pF	50V	CH
C2017	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2018	K02175121	Ceramic Cap.	120pF	50V	CH
C2019	K02175820	Ceramic Cap.	82pF	50V	CH
C2020	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2021	K02173080	Ceramic Cap.	8pF	50V	CH
C2022	K02172050	Ceramic Cap.	5pF	50V	CH
C2023	K19149021	Ceramic Cap.	0.047uF	25V	Y
C2024	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2025	K28179001	Ceramic Cap.	1000pF	50V	Y
C2026	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2027	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2028	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2029	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2030	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2031	K12171102	Ceramic Cap.	0.01uF	16V	Y
C2032	K00179001	Ceramic Cap.	0.5pF	50V	SL
C2033	K00172030	Ceramic Cap.	3pF	50V	SL
C2034	K12171102	Ceramic Cap.	1000pF	50V	E
C2035	K12171102	Ceramic Cap.	1000pF	50V	E
C2036	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2037	K00175101	Ceramic Cap.	100pF	50V	SL
C2038	K00173100	Ceramic Cap.	10pF	50V	SL
C2039	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2040	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2041	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2042	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2043	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2044	K40129004	Al Electro Cap.	0.01uF	50V	Y
C2045	K28129001	Ceramic Cap.	0.01uF	50V	Y
C2046	K28129001	Ceramic Cap.	0.01uF	50V	Y
C2047	K10176561	Ceramic Cap.	560pF	50V	B
C2048	K10176271	Ceramic Cap.	270pF	50V	B
C2049	K10176102	Ceramic Cap.	1000pF	50V	B
C2050	K10176101	Ceramic Cap.	100pF	16V	B
C2051	K10176681	Ceramic Cap.	680pF	50V	B
C2052	K28129001	Ceramic Cap.	0.01uF	50V	F
C2053	K13179014	Ceramic Cap.	0.047uF	50V	SL
C2054	K00175270	Ceramic Cap.	27pF	50V	Y
C2055	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2056	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2057	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2058	K12171102	Ceramic Cap.	1000pF	50V	E
C2059	K12171102	Ceramic Cap.	1000pF	50V	E
C2060	K40129008	Al Electro Cap.	33uF	16V	E
C2061	K12171102	Ceramic Cap.	1000pF	50V	CH
C2062	K02179001	Ceramic Cap.	1pF	50V	RH
C2063	K05173080	Ceramic Cap.	8pF	50V	CH
C2064	K02175270	Ceramic Cap.	27pF	50V	CH
C2065	K02175150	Ceramic Cap.	15pF	50V	CH
C2066	K06175220	Ceramic Cap.	22pF	50V	UJ
C2067	K02173100	Ceramic Cap.	10pF	50V	CH
C2068	K40179013	Al Electro Cap.	1uF	50V	Y
C2069	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2070	K40129008	Al Electro Cap.	33uF	16V	Y
C2071	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2072	K19149017	Ceramic Cap.	0.022uF	25V	Y
C2073	K19149019	Ceramic Cap.	0.033uF	25V	Y
C2074	K40129008	Al Electro Cap.	33uF	16V	Y
C2075	K10179101	Ceramic Cap.	100pF	50V	B
C2076	K10176101	Ceramic Cap.	100pF	50V	B
C2077	K10176101	Ceramic Cap.	100pF	50V	B
C2078	K19149005	Ceramic Cap.	0.0022uF	25V	E
C2079	K12171102	Ceramic Cap.	1000pF	50V	Y
C2080	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2081	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2082	K12171102	Ceramic Cap.	1000pF	50V	E
C2083	K12171102	Ceramic Cap.	1000pF	50V	E
C2084	K12171102	Ceramic Cap.	1000pF	50V	CH
C2085	K02179001	Ceramic Cap.	1pF	50V	CH
C2086	K02172020	Ceramic Cap.	2pF	50V	CH
C2087	K10176101	Ceramic Cap.	100pF	50V	B
C2101	K10176101	Ceramic Cap.	100pF	50V	B
C2102	K10176101	Ceramic Cap.	100pF	50V	B
C2103	K10176101	Ceramic Cap.	100pF	50V	B
C2104	K06179007	Ceramic Cap.	36pF	50V	UJ
C2105	K06175390	Ceramic Cap.	39pF	50V	UJ
C2106	K40129004	Al Electro Cap.	10uF	16V	Y
C2107	K40129008	Al Electro Cap.	33uF	16V	Y
C2108	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2109	K28129001	Ceramic Cap.	0.01uF	16V	Y
C2111	K19149025	Ceramic Cap.	0.01uF	25V	Y
C2112	K40129038	Al Electro Cap.	100uF	16V	Y
C2113	K19149013	Ceramic Cap.	0.01uF	25V	E
C2114	K12171102	Ceramic Cap.	1000pF	50V	UJ
C2115	K06179008	Ceramic Cap.	43uF	50V	CH
C2116	K02173070	Ceramic Cap.	7uF	50V	UJ
C2117	K06172050	Ceramic Cap.	5uF	50V	UJ
C2118	K06175330	Ceramic Cap.	10uF	50V	UJ
C2119	K06175150	Ceramic Cap.	15uF	50V	UJ
C2120	K12171102	Ceramic Cap.	1000pF	50V	E
C2121	K12171102	Ceramic Cap.	1000pF	50V	E
C2122	K40129008	Al Electro Cap.	33uF	16V	UJ
C2123	K06175470	Ceramic Cap.	47pF	50V	UJ
C2124	K06172050	Ceramic Cap.	5pF	50V	UJ
C2125	K05175330	Ceramic Cap.	33pF	50V	RH
C2126	K02173100	Ceramic Cap.	10pF	50V	CH
C2127	K12171102	Ceramic Cap.	1000pF	50V	E
C2128	K40129008	Al Electro Cap.	33uF	16V	UJ
C2129	K06175390	Ceramic Cap.	39pF	50V	UJ
C2130	K06172050	Ceramic Cap.	5pF	50V	UJ
C2131	K06175220	Ceramic Cap.	22pF	50V	UJ
C2132	K06172050	Ceramic Cap.	5pF	50V	UJ
C2133	K12171102	Ceramic Cap.	1000pF	50V	E
C2134	K40129008	Al Electro Cap.	33uF	16V	UJ
C2135	K06179008	Ceramic Cap.	43pF	16V	RH
C2136	K05172050	Ceramic Cap.	5pF	50V	RH
C2137	K05175180	Ceramic Cap.	18pF	50V	RH
C2138	K05172050	Ceramic Cap.	5pF	50V	RH
C2139	K12171102	Ceramic Cap.	1000pF	50V	E
C2140	K40129008	Al Electro Cap.	33uF	16V	E
C2141	K12171102	Ceramic Cap.	1000pF	50V	E
C2142	K12171102	Ceramic Cap.	1000pF	50V	E
C2143	K02172030	Ceramic Cap.	3pF	50V	CH
C2144	K12171102	Ceramic Cap.	1000pF	50V	E
C2145	K12171102	Ceramic Cap.	1000pF	50V	E
C2146	K10176331	Ceramic Cap.	330pF	50V	B
C2148	K00175270	Ceramic Cap.	27pF	50V	SL
C2149	K00175560	Ceramic Cap.	56pF	50V	SL
C2150	K00175270	Ceramic Cap.	27pF	50V	SL

PARTS LIST

PLL-LPF UNIT			PCB with Components		Printed Circuit Board	
			CP1261001	F2971101A		
			Q7023	G3326207B	Transistor	2SC2620QBTR
C2151	K00179013	Ceramic Cap.	91pF	50V	SL	
C2152	K00175470	Ceramic Cap.	47pF	50V	SL	
C2153	K00179013	Ceramic Cap.	91pF	50V	SL	
C2154	K00175560	Ceramic Cap.	56pF	50V	SL	
C2155	K00175560	Ceramic Cap.	56pF	50V	SL	
C2157	K28129001	Ceramic Cap.	0.01uF	16V	Y	
C2158	K12171102	Ceramic Cap.	1000pF	50V	E	
C2159	K12171102	Ceramic Cap.	1000pF	50V	E	
C2161	K00175101	Ceramic Cap.	100pF	50V	SL	
C2162	K28129001	Ceramic Cap.	0.01uF	16V	Y	
C2163	K13179009	Ceramic Cap.	0.047uF	50V	F	
C2164	K19149025	Ceramic Cap.	0.1uF	25V		
C2165	K00175470	Ceramic Cap.	47pF	50V	SL	
C2166	K10176331	Ceramic Cap.	330pF	50V	B	
TC2001	K91000141	Trimmer Cap.	10pF			
TC2002	K91000142	Trimmer Cap.	20pF			
TC2003	K91000142	Trimmer Cap.	20pF			
TC2004	K91000186	Trimmer Cap.	20pF			
L2001	L1190223	RFC	270uH			
L2002	L1190024	RFC	220uH			
L2003	L1190038	RFC	270uH			
L2004	L1190005	RFC	1uH			
L2010	L1190029	RFC	47uH			
L2011	L1190014	RFC	10uH			
L2012	L1190011	RFC	4.7uH			
L2013	L1190005	RFC	1uH			
L2014	L0021410	Coil	0.147uH			
L2015	L0021410	Coil	0.147uH			
L2016	L0021409	Coil	0.117uH			
L2017	L0021409	Coil	0.117uH			
L2018	L1190190	RFC	0.27uH			
L2020	L1190218	RFC	100uH			
L2021	L1190218	RFC	100uH			
T2001	L0021862	Coil	44.6MHz			
T2002	L0021862	Coil	44.6MHz			
T2003	L0021862	Coil	44.6MHz			
T2004	L0021861	Coil	5.74MHz			
T2005	L0021380	Coil	0.40uH			
T2006	L0021860	Coil	0.45uH			
T2007	L0021380	Coil	0.40uH			
T2008	L0021380	Coil	0.40uH			
T2009	L0021382	Coil	0.29uH			
J2001	P0090627	Connector				
J2002	P1090554	Connector				
J2003	P1090594	Connector				
	T9317814	Wire Assy	P2001			
	T9317813	Wire Assy	P2002			
	T9317812	Wire Assy	P2003			
	R0124120	VCO Case				
	R0124130	VCO Cover				
	R0124140A	Shield Plate				
	R0124150A	Shield Plate				
	R0124160B	Shield Plate				
	R0123770	Ground Lead				
	R0125800	Leaf Spring				

PARTS LIST

DISPLAY UNIT							
CS002-4002		PCB with Components					
F2943102D		Printed Circuit Board					
Q3001	G1090931	IC	M50932-117FP	R3035	J01225473	Carbon Film Res.	47k ohm
Q3002	G1090815	IC	TDA2003H	R3036	J01225473	Carbon Film Res.	47k ohm
Q3003	G1090299	IC	uPC7805H	R3037	J01225473	Carbon Film Res.	47k ohm
Q3004	G1090840	IC	M51943BSL	R3038	J01225473	Carbon Film Res.	47k ohm
Q3005	G3090074	Transistor	BA1A4M	R3039	J01225473	Carbon Film Res.	47k ohm
Q3006	G3090074	Transistor	BA1A4M	R3040	J01225473	Carbon Film Res.	47k ohm
Q3007	G3090079	Transistor	BA1A4P	R3041	J01225473	Carbon Film Res.	47k ohm
Q3008	G3406670C	Transistor	2SD667C	R3042	J01225473	Carbon Film Res.	47k ohm
Q3009	G3304580C	Transistor	2SC458C	R3043	J01225473	Carbon Film Res.	47k ohm
Q3014	G3090075	Transistor	BA1A4P	R3044	J01225473	Carbon Film Res.	47k ohm
D3001	G2090118	Diode	1SS97	R3045	J01225103	Carbon Film Res.	10k ohm
D3002	G2090375	Diode	GL9PR4	R3046	J01225560	Carbon Film Res.	56 ohm
D3005	G2090408	Diode	1SS270	R3047	J01225560	Carbon Film Res.	56 ohm
D3007	G2060004	Diode	1SS270TJ	RB3001	J40900030	Block Res.	47k x 8
D3008	G2090118	Diode	1SS97	C3001	K28129001	Ceramic Cap.	0.01uF
D3009	G2090118	Diode	1SS97	C3002	K40129012	Al Electro Cap.	10uF
D3010	G2090415	Diode	GL-8PQ25	C3003	K28129001	Ceramic Cap.	0.01uF
D3011	G2060004	Diode	1SS270TJ	C3004	K40129012	Al Electro Cap.	10uF
D3012	G2060004	Diode	1SS270TJ	C3005	K40179003	Al Electro Cap.	0.22uF
D3013	G2060004	Diode	1SS270TJ	C3006	K28129001	Ceramic Cap.	0.01uF
DS3001	G6090066	LCD	FTD8627PZ	C3007	K28129001	Ceramic Cap.	0.01uF
CO3001	H3900170	Ceramic Filter	CSA400MG5	C3008	K28129001	Ceramic Cap.	0.01uF
R3001	J01225391	Carbon Film Res.	390 ohm	C3009	K28129001	Ceramic Cap.	0.01uF
R3004	J01225105	Carbon Film Res.	1M ohm	C3010	K28129001	Ceramic Cap.	0.01uF
R3006	J01225101	Carbon Film Res.	100 ohm	C3011	K00175150	Ceramic Cap.	0.01uF
R3007	J01225103	Carbon Film Res.	10k ohm	C3012	K00175150	Ceramic Cap.	15pF
R3008	J01225473	Carbon Film Res.	47k ohm	C3013	K40179005	Al Electro Cap.	0.47uF
R3009	J01225102	Carbon Film Res.	1k ohm	C3014	K28129001	Ceramic Cap.	0.01uF
R3010	L01225104	Carbon Film Res.	100k ohm	C3015	K19149025	Ceramic Cap.	0.01uF
R3011	J01225103	Carbon Film Res.	10k ohm	C3016	K40129028	Al Electro Cap.	47uF
R3012	J01225472	Carbon Film Res.	4.7k ohm	C3017	K40129038	Al Electro Cap.	100uF
R3014	J01225104	Carbon Film Res.	100k ohm	C3018	K19149025	Ceramic Cap.	470uF
R3015	J01225473	Carbon Film Res.	47k ohm	C3019	K40129049	Al Electro Cap.	0.1uF
R3017	J01225473	Carbon Film Res.	47k ohm	C3020	K50177104	Film Cap.	0.1uF
R3018	J01225472	Carbon Film Res.	4.7k ohm	C3021	K40089009	Al Electro Cap.	470uF
R3019	J01225103	Carbon Film Res.	10k ohm	C3022	K28129001	Ceramic Cap.	0.01uF
R3020	J01225103	Carbon Film Res.	10k ohm	C3023	K40129012	Al Electro Cap.	10uF
R3021	J01225473	Carbon Film Res.	47k ohm	C3025	K19149023	Ceramic Cap.	0.068uF
R3022	J01225101	Carbon Film Res.	100 ohm	C3026	K40129012	Al Electro Cap.	10uF
R3023	J01225101	Carbon Film Res.	100 ohm	C3027	K28129001	Ceramic Cap.	0.01uF
R3024	J01225470	Carbon Film Res.	47 ohm	C3028	K13179009	Ceramic Cap.	0.047uF
R3025	J01225010	Carbon Film Res.	1 ohm	C3029	K13179009	Ceramic Cap.	0.047uF
R3026	J01225229	Carbon Film Res.	2.2 ohm	C3030	K40179010	Al Electro Cap.	0.47uF
R3027	J01225221	Carbon Film Res.	220 ohm	C3034	K40179005	Al Electro Cap.	0.74uF
R3028	L01225104	Carbon Film Res.	100k ohm	C3035	K40129012	Al Electro Cap.	10uF
R3029	J01225221	Carbon Film Res.	220 ohm	C3036	K13179008	Ceramic Cap.	0.0.1uF
R3030	J01225272	Carbon Film Res.	2.7k ohm	C3037	K40179013	Al Electro Cap.	1uF
R3031	J01225681	Carbon Film Res.	680 ohm	S3001	Q9000394	Rotary Code Switch	KEG10904
R3032	J01225122	Carbon Film Res.	1.2k ohm	S3002	N5090010	Switch	KEG10904
R3033	J01225473	Carbon Film Res.	47k ohm	S3003	N5090010	Switch	KEG10904
R3034	J01225473	Carbon Film Res.	47k ohm	S3004	N5090010	Switch	KEG10904
				S3005	N5090010	Switch	KEG10904
				S3006	N5090010	Switch	KEG10904
				S3007	N5090010	Switch	KEG10904
				S3008	N5090010	Switch	KEG10904
				S3009	N5090010	Switch	KEG10904
				S3010	N5090010	Switch	KEG10904
				S3011	N5090010	Switch	KEG10904
				S3012	N5090010	Switch	KEG10904

PARTS LIST

		LPF UNIT		PCB with Components		Printed Circuit Board	
		CP1274001		F29480000			
S3013	N5090010	Switch	KEG10904	D4001	G2090408	Diode	1SS270
S3014	N5090010	Switch	KEG10904	D4002	G2090408	Diode	1SS270
S3015	N4090081	Switch	SPH121C16	D4003	G2090244	Diode	1SS106
S3016	N4090081	Switch	SPH121C16	D4004	Q9000375	Surge Absorber	DSP201M-SO0B
S3017	N4090081	Switch	SPH121C16				
S3018	N4090081	Switch	SPH121C16				
S3019	N6090061	Switch	SSJ-012M				
J3002	P0090203	Connector	S02B-XH-A	R4002	J02225270	Carbon Film Res.	27 Ohm
J3003	P0090638	Connector	SC25-0.5WL	R4003	J02225270	Carbon Film Res.	27 Ohm
J3004	P0090637	Connector	SC25-0.3WL				
J3005	P0090639	Connector	SC25-0.5WL				
PL3001	Q1000010	Lamp	BQ041-22803A	C4001	K30275102	Mica Cap.	1000pF
PL3002	Q1000010	Lamp	BQ041-22803A	C4002	K00275680	Ceramic Cap.	68pF
PL3003	Q1000010	Lamp	BQ041-22803A	C4003	K00276161	Ceramic Cap.	160pF
BAT				C4004	K30275122	Mica Cap.	1200pF
3001	Q9000106	Lithium Battery	CR2025-HW1	C4005	K30275681	Mica Cap.	680pF
	Q9000192	Thermal conductor	30F-TO-220	C4006	K30275361	Mica Cap.	560pF
	R0102810	Nut Board		C4007	K30275321	Mica Cap.	820pF
	R3124170B	Light Reflector		C4008	K00275180	Ceramic Cap.	18pF
	R0124180	Heatsing Plate		C4009	K30275561	Mica Cap.	560pF
	R7125120A	Filter		C4010	K00275241	Ceramic Cap.	240pF
	R7125420	Sponge		C4011	K30275122	Mica Cap.	1200pF
	R7125440	Sponge Rubber		C4012	K00275820	Ceramic Cap.	82pF
	R7126160	Mylar Film		C4013	K30275621	Mica Cap.	620pF
	R7126480	Mylar Film		C4014	K00275241	Ceramic Cap.	240pF
	R7129620	Wire Assy	JPI-P1	C4015	K00275111	Ceramic Cap.	110pF
	T9205611	Wire Assy	JP2-P2	C4016	K30275681	Mica Cap.	680pF
	T9205612	Wire Assy	JP3-P3	C4017	K00275360	Ceramic Cap.	36pF
	T9205613	Wire Assy	JP4-P4	C4018	K00275151	Ceramic Cap.	150pF
	T9205626	Wire Assy	JP5	C4019	K00275221	Ceramic Cap.	220pF
	T9205636	Wire Assy		C4020	K00276161	Ceramic Cap.	160pF
				C4021	K00275430	Ceramic Cap.	43pF
				C4022	K30275301	Mica Cap.	300pF
				C4023	K00275111	Ceramic Cap.	110pF
				C4024	K00275111	Ceramic Cap.	110pF
				C4025	K00275101	Ceramic Cap.	100pF
				C4026	K00275430	Ceramic Cap.	43pF
				C4027	K00275151	Ceramic Cap.	150pF
				C4028	K00275820	Ceramic Cap.	82pF
				C4029	K00275120	Ceramic Cap.	12pF
				C4030	K00275111	Ceramic Cap.	110pF
				C4031	K00275820	Ceramic Cap.	82pF
				C4032	K00275330	Ceramic Cap.	33pF
				C4033	K00276161	Ceramic Cap.	160pF
				C4034	K00275120	Ceramic Cap.	12pF
				C4035	K00275910	Ceramic Cap.	91pF
				C4036	K00175221	Ceramic Cap.	220pF
				C4037	K00175221	Ceramic Cap.	220pF
				C4038	K00275100	Ceramic Cap.	10pF
				C4039	K13179009	Ceramic Cap.	0.047uF
				C4040	K13179009	Ceramic Cap.	0.047uF
				C4041	K13179009	Ceramic Cap.	0.047uF
				C4042	K13179009	Ceramic Cap.	0.047uF
				C4043	K13179009	Ceramic Cap.	0.047uF
				C4044	K13179009	Ceramic Cap.	0.047uF
				C4045	K13179009	Ceramic Cap.	0.047uF
				C4046	K13179009	Ceramic Cap.	0.047uF
				C4047	K13179009	Ceramic Cap.	0.047uF
				C4048	K13179009	Ceramic Cap.	0.047uF

PARTS LIST

100W-PA UNIT				PCB with Components		Printed Circuit Board	
				C50025001	F2947000		
C4049	K13179009	Ceramic Cap.	0.047uF	50V	F	Q5001	G3321660
C4050	K13179009	Ceramic Cap.	0.047uF	50V	F	Q5002	G3090086
C4051	K13179009	Ceramic Cap.	0.047uF	50V	F	Q5003	G3090086
C4052	K13179009	Ceramic Cap.	0.047uF	50V	F	Q5004	G3090087
C4053	K13179009	Ceramic Cap.	0.047uF	50V	F	Q5005	G3090087
TC4001	K91000013	Variable Cap.	20pF			Q5006	G1090294
L4001	L0021405	Coil	3.77uH			Q5007	G3408820Q
L4002	L0021406	Coil	2.94uH			Q5008	G3208240R
L4003	L0020615	Coil	1.90uH			Q5009	G3304580D
L4004	L0021433	Coil	2.40uH			Q5010	G1090649
L4005	L0020617	Coil	1.10uH			Q5011	G3320010L
L4006	L0020618	Coil	1.32uH			TH5001	G9090011
L4007	L0021407	Coil	0.62uH			D5001	G2090217
L4008	L0021408	Coil	0.46uH			D5002	G2090306
L4009	L0021855	Coil				D5003	G2090306
L4010	L0021856	Coil				D5004	G2090306
L4011	L0021857	Coil				D5005	G2090306
L4012	L0021858	Coil				D5006	G2015550
L4013	L0021859	Coil				D5007	G2015550
L4014	L1190090	RFC	1mH			R5001	J02225470
L4015	L1190090	RFC	1mH			R5002	J02225331
RL4001	M1190045	Relay	AG2013(DC12V)			R5003	J02225331
RL4002	M1190045	Relay	AG2013(DC12V)			R5004	J02225121
RL4003	M1190045	Relay	AG2013(DC12V)			R5005	J02245279
RL4004	M1190045	Relay	AG2013(DC12V)			R5006	J01275470
RL4005	M1190045	Relay	AG2013(DC12V)			R5007	J01275240
RL4006	M1190045	Relay	AG2013(DC12V)			R5008	J01275240
RL4007	M1190045	Relay	AG2013(DC12V)			R5009	J020306820
RL4008	M1190045	Relay	AG2013(DC12V)			R5010	J20306820
RL4009	M1190045	Relay	AG2013(DC12V)			R5011	J20306339
RL4010	M1190045	Relay	AG2013(DC12V)			R5012	J20306339
RL4011	M1190045	Relay	AG2013(DC12V)			R5013	J20306339
RL4012	M1190045	Relay	AG2013(DC12V)			R5014	J20306339
RL4013	M1190078	Relay	AG2017(DC9V)			R5015	J01275180
T9317815	T9317815	Wire Assy	P4002			R5016	J01275180
T9205615	T9205615	Wire Assy	P4003			R5017	J22359001
T9317816	T9317816	Wire Assy	P4004			R5018	J22359001
T9205614A	T9205614A	Wire Assy	JP4001(P4001)			R5019	J21339003
						R5020	J01275180
						R5021	J01275221
						R5022	J02225102
						R5023	J02225103
						R5024	J02225223
						R5025	J02225103
						R5026	J02225223
						R5027	J02225103
						R5028	J02225103
						R5029	J02225272
						R5030	J02225103
						R5031	J02225474
						R5032	J02225472
						R5033	J02225102
						R5034	J20306569

J5001	P1090255	Connector
J5002	P1090255	Connector
J5003	P0090622	Connector
J5004	P0090621	Terminal
J5005	R0100970	Terminal
J5006	R0100970	Connector
J5007	P0090621	Connector
	R0103760	TR Heatsink
	Q9000192	Thermal conductor
	Q9000284	Insulator

VR5001	J51745331	POT.	33 ohm	B
C5001	K10179024	Ceramic Cap.	0.01uF	B
C5002	K10179024	Ceramic Cap.	0.01uF	50V
C5003	K10179024	Ceramic Cap.	0.01uF	50V
C5004	K13179009	Ceramic Cap.	0.047uF	50V
C5005	K13179008	Ceramic Cap.	0.01uF	F
C5006	K40129004	Al Electro Cap.	10uF	16V
C5007	K13179009	Ceramic Cap.	0.047uF	50V
C5009	K13179008	Ceramic Cap.	0.01uF	F
C5010	K00175471	Ceramic Cap.	470uF	50V
C5011	K13179009	Ceramic Cap.	0.047uF	50V
C5012	K13179009	Ceramic Cap.	0.047uF	F
C5013	K19149025	Ceramic Cap.	0.01uF	25V
C5014	K19149021	Ceramic Cap.	0.047uF	50V
C5015	K13179009	Ceramic Cap.	0.047uF	F
C5016	K30279033	Mica Cap.	1000pF	500V
C5017	K10276682	Ceramic Cap.	6800pF	500V
C5018	K10276682	Ceramic Cap.	6800pF	500V
C5019	K13179009	Ceramic Cap.	0.047uF	B
C5020	K50177683	Film Cap.	0.068uF	F
C5021	K13179009	Ceramic Cap.	0.068uF	50V
C5022	K50177683	Film Cap.	0.068uF	50V
C5023	K30279090	Mica Cap.	560pF	500V
C5024	K30279090	Mica Cap.	560pF	500V
C5025	K30279092	Mica Cap.	750pF	500V
C5026	K30279091	Mica Cap.	620pF	500V
C5027	K13179009	Ceramic Cap.	0.047uF	F
C5028	K40129004	Al Electro Cap.	10uF	16V
C5029	K13179009	Ceramic Cap.	0.047uF	F
C5030	K40129004	Al Electro Cap.	10uF	16V
C5031	K13179009	Ceramic Cap.	0.047uF	F
C5032	K40129004	Al Electro Cap.	10uF	16V
C5033	K40129021	Al Electro Cap.	1000uF	16V
C5034	K19149025	Ceramic Cap.	0.1uF	25V
C5035	K40129004	Al Electro Cap.	10uF	16V
C5036	K13179009	Ceramic Cap.	0.047uF	F
C5037	K13179009	Ceramic Cap.	0.047uF	F
C5038	K40129004	Al Electro Cap.	10uF	16V
C5039	K40129013	Al Electro Cap.	1uF	16V
C5040	K40129013	Al Electro Cap.	1uF	16V
C5041	K13179009	Ceramic Cap.	0.047uF	F
C5042	K13179009	Ceramic Cap.	0.047uF	F
C5043	K13179009	Ceramic Cap.	0.047uF	F
C5044	K13179008	Ceramic Cap.	0.01uF	F
C5045	K13179008	Ceramic Cap.	0.01uF	F
C5046	K13179008	Ceramic Cap.	0.01uF	F
C5047	K13179008	Ceramic Cap.	0.01uF	F
C5048	K30275361	Mica Cap.	360pF	500V
L5001	L1190196	RFC	1.2uH	
L5002	L1020015	RFC		
L5003	L1020015	RFC		
L5004	L0021432	Coil	41.0uH	
T5001	L0020788A	Coil		
T5002	L0020833A	Coil		
T5003	L0021854	Coil		
T5004	L0020404	Coil		
RL5001	M1190055	Relay	AR49032 (DC12V)	

PARTS LIST

PHONE JACK UNIT		
C029433AA	PCB with Components	
F2943103A	Printed Circuit Board	
J9001	P1090351	Connector
	T9205616	CW-Assy
ACCESSORIES		
	T9014900	DC-Cord
	Q0000009	Fuse(100w Type)
		20A

FILTER UNIT		
CP1248001	PCB with Components	
F2944101	Printed Circuit Board	
D8201	G2090118	Diode
D8202	G2090118	Diode
D8203	G2090118	Diode
D8204	G2090118	Diode
D8205	G2060004	Diode
D8206	G2060004	Diode
D8207	G2090118	Diode
D8208	G2060004	Diode
D8209	G2060004	Diode
D8210	G2090118	Diode
D8211	G2090118	Diode
D8212	G2090118	Diode
D8213	G2060004	Diode
D8214	G2060004	Diode
D8215	G2090408	Diode
D8216	G2090408	Diode
D8217	G2090118	Diode
XF8201	H1102128	Crystal Filter
XF8202	H1102129	Crystal Filter
R8201	J01225471	Carbon Film Res.
R8202	J01225221	Carbon Film Res.
R8203	J01225101	Carbon Film Res.
R8204	J01225470	Carbon Film Res.
R8205	J01225151	Carbon Film Res.
R8206	J01225221	Carbon Film Res.
R8207	J01225391	Carbon Film Res.
R8208	J01225121	Carbon Film Res.
R8209	J01225102	Carbon Film Res.
R8210	J01225121	Carbon Film Res.
R8211	J01225101	Carbon Film Res.
R8212	J01225471	Carbon Film Res.
R8213	J01225010	Carbon Film Res.
R8214	J01225010	Carbon Film Res.
R8215	J01225271	Carbon Film Res.
C8201	K00173100	Ceramic Cap.
C8202	K28129001	Ceramic Cap.
C8203	K28129001	Ceramic Cap.
C8204	K00173100	Ceramic Cap.
C8205	K28129001	Ceramic Cap.
C8206	K28129001	Ceramic Cap.
C8208	K28129001	Ceramic Cap.
C8209	K28129001	Ceramic Cap.
C8211	K28129001	Ceramic Cap.
L8201	L1190220	RFC
L8202	L1190220	RFC
L8203	L1190220	RFC
J8201	P0090352	Connector
J8202	P0090390	Connector

PARTS LIST

FM UNIT			Printed Circuit Board	
F2945101			PCB with Components	
CP0662000				
Q8002	G1090145	IC	MC3357P	
Q8003	G2090749	IC	C5223P	
Q8004	G3327127G	Transistor	25C2712GR-TE85R	
Q8005	G3327127G	Transistor	25C2712GR-TE85R	
Q8006	G3070002	Transistor	DFC114-EK	
Q8007	G3070010	Transistor	DFC143-EK	
D8002	G2090408	Diode	1S5270	
D8003	G2090408	Diode	1S5270	
D8005	G2090180	Diode	FC52M-5	
D8006	G9090007	Diode	MV-12	
D8008	G2090408	Diode	1S5270	
TH8001	G9090016	Thermistor	1125252-2	
X8001	H0102855	Crystal	HC-49u/3P	8.6708MHz
X8002	H0102854	Crystal	HC-49u/3P	8.2158MHz
CF8001	H3900387	Ceramic Filter	LF-H8S	
CD8001	H7900180	Ceramic Disc.	CDB455C7	
R8006	J24205222	Chip Res.	2.2k ohm	1/10w
R8007	J24205222	Chip Res.	2.2k ohm	1/10w
R8008	J24205473	Chip Res.	47k ohm	1/10w
R8009	J24205152	Chip Res.	1.5k ohm	1/10w
R8010	J24205332	Chip Res.	3.3k ohm	1/10w
R8011	J24205333	Chip Res.	33k ohm	1/10w
R8013	J24205153	Chip Res.	15k ohm	1/10w
R8014	J24205152	Chip Res.	1.5k ohm	1/10w
R8015	J24205334	Chip Res.	330k ohm	1/10w
R8016	J24205102	Chip Res.	1k ohm	1/10w
R8017	J24205472	Chip Res.	4.7k ohm	1/10w
R8019	J24205821	Chip Res.	820 ohm	1/10w
R8021	J24205101	Chip Res.	100 ohm	1/10w
R8022	J24205154	Chip Res.	150k ohm	1/10w
R8023	J24205472	Chip Res.	4.7k ohm	1/10w
R8024	J24205335	Chip Res.	3.3M	1/10w
R8025	J24205332	Chip Res.	3.3k ohm	1/10w
R8026	J24205472	Chip Res.	4.7k ohm	1/10w
R8027	J24205392	Chip Res.	3.9k ohm	1/10w
R8028	J24205123	Chip Res.	12k ohm	1/10w
R8029	J24205123	Chip Res.	12k ohm	1/10w
R8030	J24205105	Chip Res.	1M	1/10w
R8031	J24205223	Chip Res.	22k ohm	1/10w
R8032	J24205102	Chip Res.	1k ohm	1/10w
R8033	J24205562	Chip Res.	5.6k ohm	1/10w
R8034	J24205104	Chip Res.	100k ohm	1/10w
R8035	J24205223	Chip Res.	22k ohm	1/10w
R8036	J24205153	Chip Res.	15k ohm	1/10w
R8037	J24205101	Chip Res.	100 ohm	1/10w
R8038	J24205471	Chip Res.	470 ohm	1/10w
R8039	J24205223	Chip Res.	22k ohm	1/10w
R8040	J24205472	Chip Res.	4.7k ohm	1/10w
R8041	J24205101	Chip Res.	100 ohm	1/10w
R8042	J24205102	Chip Res.	1k ohm	1/10w

R8043	J01225824	Chip Res.	820k ohm	1/10w
VR8001	J51745222	POT.	2.2k Ω	
VR8002	J21745103	POT.	10k Ω	
VR8003	J51745472	POT.	4.7k Ω	
C8003	K22170235	Chip Cap.	100pF	50V
C8004	K22170227	Chip Cap.	47pF	50V
C8005	K22170237	Chip Cap.	120pF	50V
C8006	K22141809	Chip Cap.	0.1uF	50V
C8007	K22141809	Chip Cap.	0.1uF	50V
C8008	K22170237	Chip Cap.	120pF	50V
C8010	K22170237	Al Electro Cap.	1uF	50V
C8011	K19149001	Ceramic Cap.	0.001uF	50V
C8012	K19149001	Chip Cap.	0.001uF	50V
C8013	K19149025	Chip Cap.	0.1uF	50V
C8014	K22171008	Chip Cap.	0.047uF	50V
C8015	K70147155	Tantalum Cap.	1.5uF	50V
C8016	K22170817	Chip Cap.	0.01uF	50V
C8017	K22170805	Chip Cap.	0.001uF	50V
C8018	K40149025	Al Electro Cap.	22uF	25V
C8019	K50177472	Mica Cap.	0.0047uF	50V
C8020	K40179013	Al Electro Cap.	1uF	50V
C8021	K50177682	Film Cap.	0.0068uF	50V
C8022	K40149025	Al Electro Cap.	22uF	25V
C8023	K50177332	Film Cap.	0.0033uF	50V
C8024	K40179013	Al Electro Cap.	1uF	50V
C8025	K22170805	Chip Cap.	0.001uF	50V
C8026	K22170347	Chip Cap.	330pF	50V
C8027	K22170347	Chip Cap.	330pF	50V
C8028	K22170817	Chip Cap.	0.01uF	50V
C8029	K22170323	Chip Cap.	33pF	50V
C8031	K22170817	Chip Cap.	0.01uF	50V
C8032	K22170817	Chip Cap.	0.01uF	50V
C8033	K22170817	Chip Cap.	0.01uF	50V
C8035	K22170817	Chip Cap.	0.01uF	50V
C8036	K22170817	Chip Cap.	0.01uF	50V
T8001	L0021863	Coil	SO-7008	8.2158MHz
T8002	L0021199	Coil	1212-4043A	8.20MHz
L8001	L1190189	RFC	LAL03NA102K	1mH
J8001	P1090595	Connector	11P-SHVQ	
Q6100017	Q6100002	Jumper C	0.6-7.5	
Q6100002	Q6100002	Jumper C	0.6-10.0	

NOTE